

ENERGY AND AUTOMATION

DIRECT-ON-LINE-STARTER, ENCLOSED WITH THERMAL OVERLOAD RELAY, WITH RESET **electric** PUSHBUTTON, WITH BF25/BF32 CONTACTOR, 25A MAX (11KW AT 400V), IP65. CONTACTOR COIL VOLTAGE 400VAC 50/60HZ




| Product designation | | | Direct-on-line starter |
|---------------------------------------|-----|----|------------------------|
| Product type designation | | | M2R02512B3 |
| Electrical features | | | |
| Relay adj range | | Α | 20-25 |
| IEC technical characteristics (≤440V) | | | |
| | le | Α | 25 |
| | kW | kW | 11 |
| Components | | | |
| Starter enclosure standard supplied | | | M2RA |
| Contactor standard supplied | | | BF2510A |
| Thermal relay standard supplied | | | RF382500 |
| Mechanical features | | | |
| Weight | | g | 1165 |
| Ambient conditions | | | |
| Operating temperature | | | |
| | min | °C | -25 |
| | max | °C | +60 |
| Storage temperature | | | |
| | min | °C | -40 |
| | max | °C | +70 |
| Resistance & Protection | | | |
| Frontal IP degree | | | IP65 |
| Dimensions | | | |



DIRECT-ON-LINE-STARTER, ENCLOSED WITH THERMAL OVERLOAD RELAY, WITH RESET **electric** PUSHBUTTON, WITH BF25/BF32 CONTACTOR, 25A MAX (11KW AT 400V), IP65. CONTACTOR COIL VOLTAGE 400VAC 50/60HZ


ENERGY AND AUTOMATION

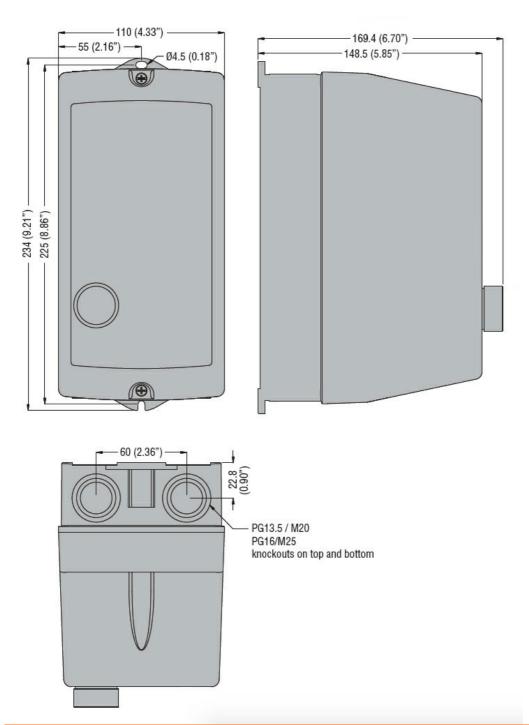

Wiring diagrams

DIRECT-ON-LINE-STARTER, ENCLOSED WITH THERMAL OVERLOAD RELAY, WITH RESET **electric** PUSHBUTTON, WITH BF25/BF32 CONTACTOR, 25A MAX (11KW AT 400V), IP65. CONTACTOR COIL VOLTAGE 400VAC 50/60HZ

ENERGY AND AUTOMATION

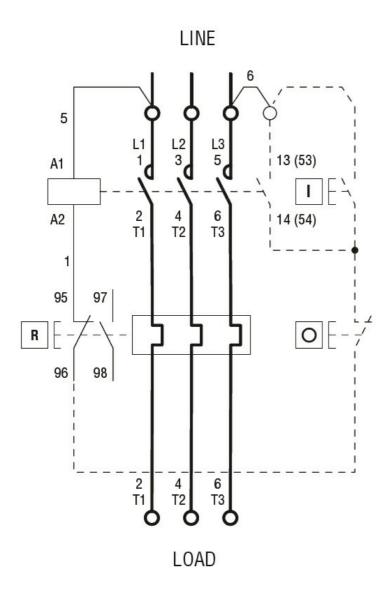

R = Reset; I = Start; O = Stop

Compliance IEC/EN 60947-1 IEC/EN 60947-4-1

UL508 CSA C22.2 n° 14

EAC

Certificates **CSAus** cULus

Certifications and compliance

ETIM classification

ETIM 8.0

EC001037 -Motor starter/Motor starter combination