

START-UP PRIORITY CHANGE RELAY, MODULAR VERSION, 2 OUTPUTS. AC SUPPLY VOLTAGE, 220...240VAC




Product designation Product type designation Function			Start-up priority change relay. Possible starting of stand-by motor. Modular version LVMP10 Start-up priority change relay. Possible starting of stand-by motor
Auxiliary supply			
Supply voltage Type			Single voltage
Rated auxiliary supply voltage Us			
AC			
	min	VAC	220
	Max	VAC	240
Operating voltage range			0.851.1 Us
Rated frequency		Hz	50/60
Power consumption Max		VA	4.8
Power dissipation Max		W	3
Relay outputs			
Number of relays		Nr.	2
Relay state			Normally de- energised, energises at
			tripping
Contact arrangement			tripping 2 x 1NO-SPST contact
		VAC	2 x 1NO-SPST
Contact arrangement		VAC VAC	2 x 1NO-SPST contact
Contact arrangement Rated operational voltage AC (IEC)			2 x 1NO-SPST contact 250
Contact arrangement Rated operational voltage AC (IEC) Maximum switching voltage		VAC	2 x 1NO-SPST contact 250 400
Contact arrangement Rated operational voltage AC (IEC) Maximum switching voltage IEC Conventional free air thermal current Ith		VAC	2 x 1NO-SPST contact 250 400 8
Contact arrangement Rated operational voltage AC (IEC) Maximum switching voltage IEC Conventional free air thermal current Ith UL/CSA and IEC/EN 60947-5-1 designation		VAC A	2 x 1NO-SPST contact 250 400 8 B300
Contact arrangement Rated operational voltage AC (IEC) Maximum switching voltage IEC Conventional free air thermal current Ith UL/CSA and IEC/EN 60947-5-1 designation Electrical life (with rated load)		VAC A cycles	2 x 1NO-SPST contact 250 400 8 B300 10 ⁵
Contact arrangement Rated operational voltage AC (IEC) Maximum switching voltage IEC Conventional free air thermal current Ith UL/CSA and IEC/EN 60947-5-1 designation Electrical life (with rated load) Mechanical life Indications Indication		VAC A cycles	2 x 1NO-SPST contact 250 400 8 B300 10 ⁵
Contact arrangement Rated operational voltage AC (IEC) Maximum switching voltage IEC Conventional free air thermal current Ith UL/CSA and IEC/EN 60947-5-1 designation Electrical life (with rated load) Mechanical life Indications Indication		VAC A cycles	2 x 1NO-SPST contact 250 400 8 B300 10 ⁵ 30x10 ⁶ 1 green LED for power on 1 red LED for relay state
Contact arrangement Rated operational voltage AC (IEC) Maximum switching voltage IEC Conventional free air thermal current Ith UL/CSA and IEC/EN 60947-5-1 designation Electrical life (with rated load) Mechanical life Indications Indication Functions 3 detecting electrodes (MIN, MAX and COM)		VAC A cycles	2 x 1NO-SPST contact 250 400 8 B300 10 ⁵ 30x10 ⁶ 1 green LED for power on 1 red LED for relay state
Contact arrangement Rated operational voltage AC (IEC) Maximum switching voltage IEC Conventional free air thermal current Ith UL/CSA and IEC/EN 60947-5-1 designation Electrical life (with rated load) Mechanical life Indications Indication Functions 3 detecting electrodes (MIN, MAX and COM) 5 detecting electrodes (MIN1, MAX1, MIN2, MAX2 and COM		VAC A cycles	2 x 1NO-SPST contact 250 400 8 B300 10 ⁵ 30x10 ⁶ 1 green LED for power on 1 red LED for relay state No
Contact arrangement Rated operational voltage AC (IEC) Maximum switching voltage IEC Conventional free air thermal current Ith UL/CSA and IEC/EN 60947-5-1 designation Electrical life (with rated load) Mechanical life Indications Indication Functions 3 detecting electrodes (MIN, MAX and COM) 5 detecting electrodes (MIN1, MAX1, MIN2, MAX2 and COM) Sensitivity adjustment 2.550k Ω		VAC A cycles	2 x 1NO-SPST contact 250 400 8 B300 10 ⁵ 30x10 ⁶ 1 green LED for power on 1 red LED for relay state
Contact arrangement Rated operational voltage AC (IEC) Maximum switching voltage IEC Conventional free air thermal current Ith UL/CSA and IEC/EN 60947-5-1 designation Electrical life (with rated load) Mechanical life Indications Indication Functions 3 detecting electrodes (MIN, MAX and COM) 5 detecting electrodes (MIN1, MAX1, MIN2, MAX2 and COM		VAC A cycles	2 x 1NO-SPST contact 250 400 8 B300 10 ⁵ 30x10 ⁶ 1 green LED for power on 1 red LED for relay state No

ENERGY AND AUTOMATION

START-UP PRIORITY CHANGE RELAY, MODULAR VERSION, 2 OUTPUTS. AC SUPPLY VOLTAGE, 220...240VAC


A II 4 I I I I I I I I I I I I I I I I I			
Adjustable sensitivity full-scale value 25-50-100-200 k Ω			No
Separate sensitivity adjustment for MAX probe (foam detection)			No
Emptying function			No
Filling function			No
Emptying function with MIN and/or MAX alarm			No
Filling function with MIN and/or MAX alarm			No
Emptying function with pump priority change			No
Filling function with pump priority change			No
Tank filling, well drawing and alarm			No
Filling-emptying adjustment selector			No
Programming selector for 5 different			No
Motor start-up priority change			No
Connections			
Terminals type			Screw
Tightening torque for terminals			
	max	Nm	0.8
	max	Ibin	7
Conductor cross section			
AWG/Kcmil			
	min	AWG	24
	Max	AWG	12
IEC			
	min	mm²	0.2
	Max	mm²	4
Insulations			
Rated insulation voltage Ui		V	415
Rated impulse withstand voltage Uimp		kV	4
Operating frequency withstand voltage		kV	2.5
Ambient conditions			
Temperature			
Operating temperature		0.0	00
	min	°C	-20
	max	°C	+60
Storage temperature		0.0	0.0
	min	°C	-30
Housing	max	°C	+80
Housing			Modular DIN rail
Execution			mounting
N° of modules			3
14 Of filodules			Self-extinguishing
Material			polyamide
			35mm DIN rail
			(IEC/EN 60715)
Mounting			or by screws
			using extractable
			clips
IEC degree of protection			IP40 on front / IP20 on terminals
Dimensions (W x H x D)		mm	53.5 x 104.7 x 64.9
Weight		g	250
Dimensions			



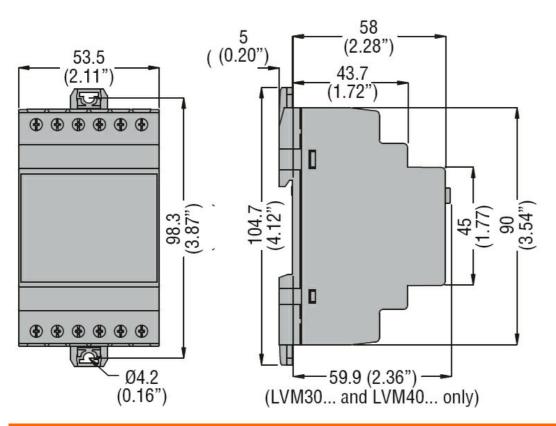

Wiring diagrams


2-wire connection



C1 = Primary

C2 = Secondary / Standby

3-wire connection



C1 = Start Primary

C2 = Start Standby C3 = Stop Primary

C4 = Stop Standby

Certifications and compliance

Compliance



LVMP10A240

START-UP PRIORITY CHANGE RELAY, MODULAR VERSION, 2 OUTPUTS. AC SUPPLY VOLTAGE, 220...240VAC

CSA C22.2 n° 14

IEC/EN 60255-5

IEC/EN 61000-6-2

IEC/EN 61000-6-3

UL508

CULus

EAC

ETIM classification

ETIM 8.0

Certificates

EC001447 - (Fill) level monitoring relay