MOTOR PROTECTION RELAY, PHASE FAILURE/SINGLE-PHASE SENSITIVE. THREE-POLE electric (THREE-PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 CONTACTORS, 1...1.6A

**ENERGY AND AUTOMATION** 



Product designation			RF38
Product type designation			Motor protection relay
General characteristics			
Number of poles		Nr.	3
Overvoltage category			
Pollution degree			3
Frontal IP degree			IP20
Type of release			Thermal
Protection fuse			
	gG (IEC)	Α	4
	aM (IEC)	Α	2
	RK5 (UL)	Α	6
Phase failure detection			yes
Reset mode			Manual or
Power circuit characteristics			automatic
Rated insulation voltage Ui IEC/EN		V	690
Rated impulse withstand voltage Uimp		kV	6
Rated operational voltage		V	690
Operational frequency		v	030
Operational moduloney	min	Hz	0
	max	Hz	400
Operational current le	max	112	400
Operational current le	Operational current min	Α	1
	Operational current max	A	1.6
Tripping class	Operational current max		10A
Test Button			Yes
Trip indicator			yes
Terminals			ycs
Tenninais			screw and
	type		washer
	screw		M4
	width	mm	12.6
	tool		Phillips 2
Tightening torque for terminals			· ·
	min	Nm	2
	max	Nm	2.5
	min	Ibin	1.5
	max	Ibin	1.8
Conductor section	<del></del>		
	Flexible w/o lug max	mm²	10
	Flexible c/w lug max	mm²	6
	AWG/kcmil max		8
Auxiliary circuit characteristics			



MOTOR PROTECTION RELAY, PHASE FAILURE/SINGLE-PHASE SENSITIVE. THREE-POLE **electric** (THREE-PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38

ENERGY AND AUTOMATION

CONTACTORS, 1...1.6A

Διινί	liarv	conta	ncts
<i>,</i> ,u,,,	nai y	OULIC	ıvıv

Advillary contacts			
	NO	Nr.	1
Auxiliary Rated insulation voltage Ui IEC/EN	NC	Nr.	1 690
Auxiliary Rated insulation voltage UTEC/EN  Auxiliary Rated impulse withstand voltage Uimp		kV	6
Auxiliary Rated impulse withstand voltage oimp  Auxiliary Rated operational voltage		V	690
Operating current AC15		V	090
Operating current AO13	24V	Α	3
	120V	A	3
	240V	A	1.5
	380V	A	0.95
	480V	Α	0.75
	500V	Α	0.72
	600V	Α	0.6
Operating current DC13			
	125V	Α	0.11
	600V	Α	0.22
IEC Conventional free air thermal current Ith		Α	10
Terminals			
	Auxiliary circuit type		screw and
	•		washer
	Auxiliary circuit screw		M3.5
	Auxiliary circuit width	mm	8
	Auxiliary circuit tool		Phillips 2
Conductor section		•	
	Auxiliary circuit Flexible w/o lug max	mm²	2.5
The first of the f	Auxiliary circut Flexible c/w lug max	mm²	2.5
Tightening torque for terminals	A The state West	NI	0.0
	Auxiliary circuit min	Nm	0.8
	Auxiliary circuit max	Nm	1
	Auxiliary circuit min	lbin Ibin	0.59 0.74
UL/CSA and IEC/EN 60947-5-1 designation	Auxiliary circuit max	IDIII	B600-R300
Ambient conditions			D000-R300
Operating temperature			
Operating temperature	min	°C	-25
	max	°C	60
Storage temperature	max		
	min	°C	-50
	max	°C	70
Compensation temperature			
La company to the company	min	°C	-20
	max	°C	60
Max altitude		m	3000
Mechanical features			
Operating position			
	normal		Vertical plan
	allowable		±30°
			Direct mounting
			DE00
Fixing			on BF09
			BF38
Fixing Weight UL technical data		g	

MOTOR PROTECTION RELAY, PHASE FAILURE/SINGLE-PHASE SENSITIVE. THREE-POLE **electric** (THREE-PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 CONTACTORS, 1...1.6A


**ENERGY AND AUTOMATION** 

Full-load current (FLA) for three-phase AC motor


at 480V Α 1.6 at 600V 1.6 Α

## **Dimensions**


BF00 A... BF09 A... - BF12 A... - BF18 A... - BF25 A... three poles with RF...38 thermal overload relay

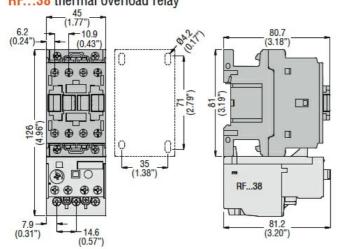

BF26 00A... - BF32 00A... - BF38 00A... three poles with RF...38 thermal overload relay

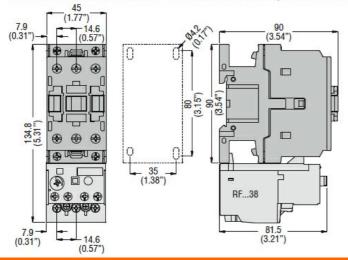

## Wiring diagrams

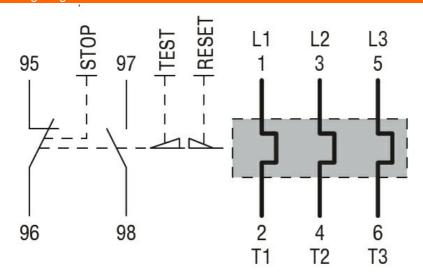

## Certifications and compliance

## RF380160



MOTOR PROTECTION RELAY, PHASE FAILURE/SINGLE-PHASE SENSITIVE. THREE-POLE **electric** (THREE-PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 CONTACTORS, 1...1.6A

**ENERGY AND AUTOMATION** 

Compliance

CSA C22.2 n° 14 IEC/EN 60947-1

IEC/EN 60947-4-1

**UL508** 

Certifications

CCC

cULus

EAC

ETIM classification

**ETIM 8.0** 

EC000106 -

Thermal overload

relay