




**Contact characteristics**


Number of poles	Nr.	4
Operational current I <sub>e</sub>	AC-4 (400V)	A 240
Making capacity (RMS value)	A	5000
Breaking capacity at voltage	440V	A 5000
	500V	A 4500
	690V	A 4000

**Dimensions**

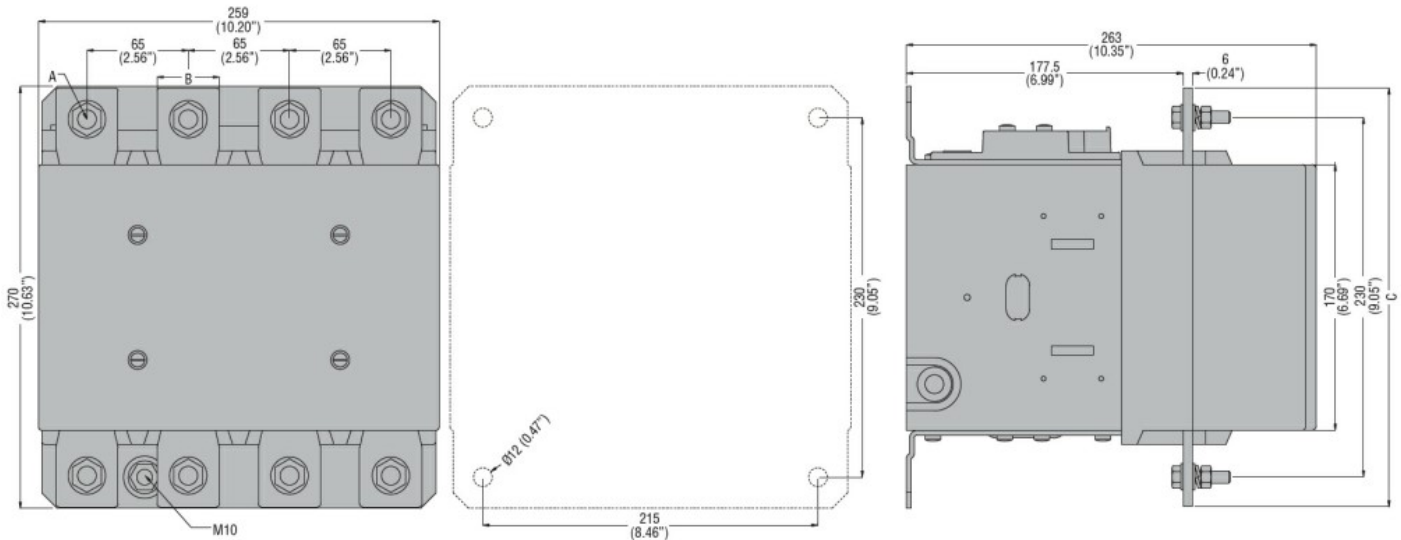

CONTACTOR TYPE	A	B	C
B500	M10	35 (1.38")	265 (10.43")
B630	M12	40 (1.57")	270 (10.63")

**Wiring diagrams**

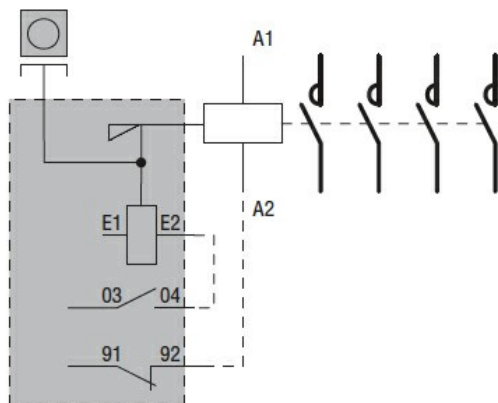

**Certifications and compliance**

Compliance

CSA C22.2 n° 60947-1

---

CSA C22.2 n° 60947-4-1

---

IEC/EN 60947-1

---

IEC/EN 60947-4-1

---

UL 60947-1

---

UL 60947-4-1

---

Certificates

cULus