RFN380160



MOTOR PROTECTION RELAY, NON PHASE FAILURE/NON SINGLE-PHASE SENSITIVE. THREE-POLE (THREE-PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 CONTACTORS, 1...1.6A



Product type designation relay General characteristics visual state Number of poles Nr. 3 Overvoltage category III Pollution degree 3 Frontal IP degree IP20 Type of release Ther Protection fuse gG (IEC) A 4 aM (IEC) A 2 RK5 (UL) A 6)
General characteristics Number of poles Nr. 3 Overvoltage category III Pollution degree 3 Frontal IP degree IP20 Type of release Ther Protection fuse gG (IEC) A 4 aM (IEC) A 2 RK5 (UL) A 6)
Overvoltage category III Pollution degree 3 Frontal IP degree IP20 Type of release Ther Protection fuse gG (IEC) A 4 aM (IEC) A 2 RK5 (UL) A 6	
Pollution degree 3 Frontal IP degree IP20 Type of release Ther Protection fuse gG (IEC) A 4 aM (IEC) A 2 RK5 (UL) A 6	
Frontal IP degree IP20 Type of release Ther Protection fuse gG (IEC) A 4 aM (IEC) A 2 RK5 (UL) A 6	
Type of release There Protection fuse gG (IEC) A 4 aM (IEC) A 2 RK5 (UL) A 6	
Protection fuse gG (IEC) A 4 aM (IEC) A 2 RK5 (UL) A 6	in al
gG (IEC) A 4 aM (IEC) A 2 RK5 (UL) A 6	mai
aM (IEC) A 2 RK5 (UL) A 6	
RK5 (UL) A 6	
Dhoop failure detection	
Phase failure detection no	
	ual or
auto	matic
Power circuit characteristics	
Rated insulation voltage Ui IEC/EN V 690	
Rated impulse withstand voltage Uimp kV 6	
Rated operational voltage V 690	
Operational frequency	
min Hz 0	
max Hz 400	
Operational current le	
Operational current min A 1	
Operational current max A 1.6	
Tripping class 10A	
Test Button Yes	
Trip indicator yes	
Terminals	
type scre	w and
Wash	ner
screw M4	
width mm 12.6	
	ips 2
Tightening torque for terminals	
min Nm 2	
max Nm 2.5	
min Ibin 1.5	
max Ibin 1.8	
Conductor section	
AWG/kcmil max 8	
Auxiliary circuit characteristics	

RFN380160



RFN380160 MOTOR PROTECTION RELAY, NON PHASE FAILURE/NON SINGLE-PHASE SENSITIVE. THREE-POLE (THREE-PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 CONTACTORS, 1...1.6A

	NC	Nr.	1
Auxiliary Rated insulation voltage Ui IEC/EN		V	690
Auxiliary Rated impulse withstand voltage Uimp		kV	6
Auxiliary Rated operational voltage		V	690
Operating current AC15			
	24V	А	3
	120V	А	3
	240V	А	1.5
	380V	А	0.95
	480V	А	0.75
	500V	A	0.72
	600V	A	0.6
Operating current DC13			- · · ·
	125V	A	0.11
	600V	A	0.22
IEC Conventional free air thermal current Ith		А	10
Terminals			
	Auxiliary circuit type		screw and washer
	Auxiliary circuit screw		M3,5
	Auxiliary circuit screw	mm	8
	Auxiliary circuit would Auxiliary circuit tool	111111	o Phillips 2
Conductor section	Adxillary circuit tool		
	Auxiliary circuit Flexible w/o lug max	mm²	2.5
	Auxiliary circut Flexible c/w lug max	mm²	2.5
Tightening torque for terminals	Addition y circuit include c/w log max		2.0
rightening torque for terminate	Auxiliary circuit min	Nm	0.8
	Auxiliary circuit max	Nm	1
	Auxiliary circuit min	Ibin	0.59
	Auxiliary circuit max	Ibin	0.74
UL/CSA and IEC/EN 60947-5-1 designation			B600-R300
Ambient conditions			
Operating temperature			
	min	°C	-25
	max	°C	60
Storage temperature			
	min	°C	-50
	max	°C	70
Compensation temperature			
	min	°C	-20
	max	°C	60
Max altitude		m	3000
Mechanical features			
Operating position			
	normal		Vertical plan
	allowable		±30°
			Direct mounting
Fixing			on BF09
Weight		~	BF38 160
UL technical data		g	
Full-load current (FLA) for three-phase AC motor			
	at 480V	А	1.6
	at 600V	A	1.6
	at 000 V	~	1.0

RFN380160




RFN380160

ENERGY AND AUTOMATION


MOTOR PROTECTION RELAY, NON PHASE FAILURE/NON SINGLE-PHASE SENSITIVE. THREE-POLE (THREE-PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 CONTACTORS, 1...1.6A

Dimensions


BF00 A... BF09 A... - BF12 A... - BF18 A... - BF25 A... three poles with RF...38 thermal overload relay

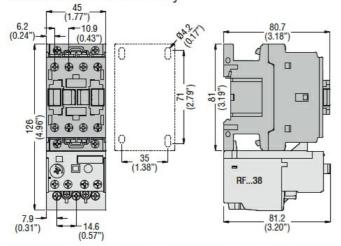

BF26 00A... - BF32 00A... - BF38 00A... three poles with RF...38 thermal overload relay

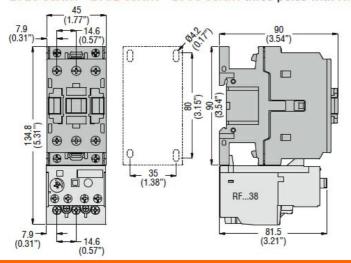

Wiring diagrams

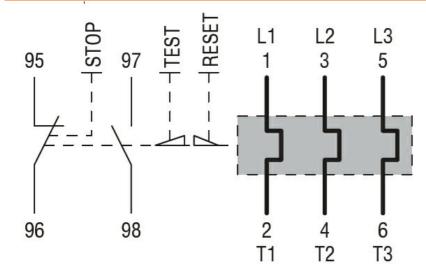

Certifications and compliance

Compliance

CSA C22.2 n° 14 IEC/EN 60947-1

RFN380160



RFN380160 MOTOR PROTECTION RELAY, NON PHASE FAILURE/NON SINGLE-PHASE SENSITIVE. THREE-POLE (THREE-PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 CONTACTORS, 1...1.6A

	IEC/EN 60947-4-1	
	UL508	
Certifications		
	CCC	
	cULus	
	EAC	
ETIM classification		
		EC000106

ETIM 8.0

EC000106 -Thermal overload relay