

ROTARY CAM SWITCH 7GN SERIES, DAHLANDER MOTOR CONTROL SWITCH 1-0-2, 25A, FOR REAR MOUNTING WITH BLACK HANDLE, FRONT PLATE 48X48MM

Product designation Product type designation	on			Rotary cam switches 7GN25
General characteristics				7 61126
Switching diagram				13 - Dahlander motor control switch 1-0-2
N° of elements				4
Mounting form				O - Rear mounting with black handle
Contact characteristics				
Rated insulation voltag	e Ui			
		IEC/EN	V	690
		UL/CSA	V	600
Rated impulse withstar			kV	6
Conventional free air th	nermal current Ith	150/51		
		IEC/EN	A	25
Dated an arctional valte		UL/CSA	A	30
Rated operational volta Rated operational impu			V kV	480
	short-circuit protection In (gG)		KV	4
Waxiiiiuiii luse size ioi	short-circuit protection in (gG)	10kA	Α	25
		15kA	A	25
		25kA	Α	25
Rated short time curre	nt Icw			
		1s	kA	400
Conductivity				10/5 mA/V
Operational current le	IEC/EN			
·	AC1/AC21A			
			Α	25
	AC15			_
		110V	Α	16
		220/230V	Α	12
		380/400V	Α	8
		660/690V	Α	2
Rated operational pow				
	Three-phase AC-3	220/230V	kW	5.5
		380/440V	kW	7.5
		500/690V	kW	7.5 7.5
	Single-phase AC-3	000/0001	1000	7.0
	cingle phase ris s	110V	kW	1.5
		220/230V	kW	3
		380/440V	kW	5.5
	Three-phase AC23A			
		220/230V	kW	6.5
		380/440V	kW	11
		500/690V	kW	11
	Single-phase AC23A			
		110V	kW	1.5
		220/230V	kW	3.7
Detection of the		380/440V	kW	5.5
Rated operational curre	ent in DC			



ROTARY CAM SWITCH 7GN SERIES, DAHLANDER MOTOR CONTROL SWITCH 1-0-2, 25A, FOR REAR MOUNTING WITH BLACK HANDLE, FRONT PLATE 48X48MM

	DC21A			
		48V	Α	25
		60V	Α	25
		110V	A	4
	DCCCA (nales in agrica)	220V	A	0.7
	DC23A (poles in series)	0.417	٨	OF (4)
		24V 48V	A	25 (1)
		46 V 60 V	A A	25 (2)
		110V	A	25 (3) 12 (3)
		220V	A	12 (3) 10 (4)
	DC13	2201		10 (4)
	5010	24V	Α	25
		48V	A	20
		60V	Α	16
		110V	Α	1.5
		220V	A	0.4
Power dissipation			W	1.1
Mechanical features				
Terminals screw				M3.5
Tightening torque for te	erminals max		Nm	0.8
Conductor size				
	AWG - Rigid cable			
		min	AWG	20
		Max	AWG	10
	AWG - Flexible cable			_
		min	AWG	20
		Max	AWG	12
	Conductor size (IEC) - Flexible cable			
		min	mm²	0.5
		Max	mm²	4
	Conductor size (IEC) - Rigid cable		2	
		min	mm²	0.5
NA 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		Max	mm²	4
Mechanical life			cycles	5x10 ⁶
UL technical data	on line control			
Motor power for direct-	for three-phase motor			
	ioi unee-phase motol	120V	HP	3
		120V 240V	HP	5 5
		480V	HP	10
		600V	HP	15
	for single-phase motor	300 0		
		120V	HP	1.5
		240V	HP	3
Ambient conditions				
Temperature				
-	Operating temperature			
	-	min	°C	-25
		max	°C	+55
	Storage temperature			
		min	°C	-40
		max	°C	+70
Resistance & Protection	on			

IP40


Frontal IP degree

ROTARY CAM SWITCH 7GN SERIES, DAHLANDER MOTOR CONTROL SWITCH 1-0-2, 25A, FOR REAR MOUNTING WITH BLACK HANDLE, FRONT PLATE 48X48MM

ENERGY AND AUTOMATION


Terminals IP degree IP00

Dimensions

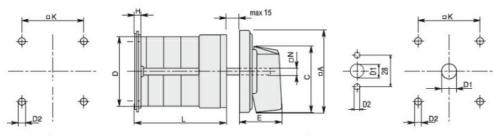

Series	Dimensions						L Number of elements													
Series	□A	С	ØD	ØD2	Е	Ξ	□K	□N	1	2	3	4	5	6	7	8	9	10	11	12
7GN12	48	39.5	39	5	26.5	5	36	6	38.1	47.8	57.5	67.2	76.9	86.6	96.3	106	115.7	125.4	135.1	144.8
7GN20	48	39.5	39	5	26.5	5	36	6	38.1	47.8	57.5	67.2	76.9	86.6	96.3	106	115.7	125.4	135.1	144.8
7GN25	48	39.5	43	5	26.5	5	36	6	42.5	56.1	69.7	83.3	96.9	110.5	124.1	137.7	151.3	164.9	178.5	192.1
7GN32	65	53	58	5	34.5	5.5	48	7	48.5	63.6	78.7	93.8	108.9	124	139.1	154.2	169.3	184.4	199.5	214.6
7GN40	65	53	58	5	34.5	5.5	48	7	48.5	63.6	78.7	93.8	108.9	124	139.1	154.2	169.3	184.4	199.5	214.6
7GN63	65	53	62	6	34.5	7.5	68	7	53.3	71.4	89.5	107.6	125.7	143.8	161.9	180	198.1	216.2	234.3	252.4
7GN125	90	70.5	86	6	41.4	7.5	68	9	74.8	103.9	133	162.1	191.2	220.3	249.4	278.5	307.6	336.7	365.8	394.9

Wiring diagrams

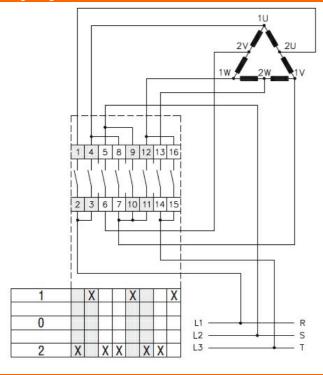

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-3

IEC/EN/BS 60947-5-1

UL60947-4-1

Certificates

cCSAus



7GN2513O

ROTARY CAM SWITCH 7GN SERIES, DAHLANDER MOTOR CONTROL SWITCH 1-0-2, 25A, FOR REAR MOUNTING WITH BLACK HANDLE, FRONT PLATE 48X48MM

EAC			
LII			

ETIM classification

ETIM 8.0

EC001029 -Selector switch, complete