



Product designation
Product type designation
Motor type

Soft Starter
ADX...B
Asynchronous
three phase

Electrical features

Supplies voltage	Type of system		Three phase
	Rated supply voltage	V	208...500VAC
	auxiliary supply voltage (Us)		208...240VAC
	Rated frequency	Hz	50/60
Rated starter current Ie		A	45
Rated motor power	IEC ratings (T≤40°C)		
	230VAC	kW	11
	400VAC	kW	22
	500VAC	KW	30
	UL ratings (T≤40°C)		
	220-240VAC	HP	15
	380-415VAC	HP	25
	440-480VAC	HP	30
Number of controlled phases		Nr.	3
Built-in bypass			Yes
Cooling System			Natural
Programming interface			
Display			Backlit LCD 2x16 character
Programming with NFC technology			No
Optical port			No
Startup and stop settings			
Startup method			Torque or voltage ramp with current limitation
Stop method			Torque ramp, voltage ramp, free-wheel stop
Braking method			DC dynamic with external relay
Protections			
Auxiliary supply protection			Voltage too low No power, phase loss, phase sequence,
Power supply Protection			frequency out of limits, minimum and maximum voltage

Motor protection	Overload at starting (trip class 2, 10A, 10, 15, 20, 25, 30, 35 and 40), overload during running (trip class 2, 10A, 10, 15, 20, 25 and 30), locked rotor, current asymmetry, minimum torque (dry run), overtemperature, starting too long
Starter protection	Overcurrent, overtemperature, bypass failure, phase shorted, temperature sensor fault, maintenance request

Functions	
Built-in bypass	3
Built-in display and keypad	Yes
Languages	Yes
View measurements	4
Torque control	Yes
Adjustable current limit	Yes
Dynamic braking	Yes
Kick Start function	Yes
Motor overload electronic protection	Yes
Motor protection PTC input	Yes
Protection against phase loss	Yes
Protection against phase inversion	Yes
Protection against locked rotor	Yes
Protection against thyristor overtemperature	Yes
Protection against low load	Yes
Programmable alarm	Yes
Digital inputs	Yes
Analog inputs	Yes
Digital outputs	Yes
Analog output	Yes
Monitoring communication	Yes
Optical port for programming	RS323
Event log	No
Motor hour counter	Yes
Startup counter	Yes
Clock calendar	Yes
Remote external keypad	Yes
Plug-in version	Optional

Input and Output

Digital inputs

Number of digital input	Nr.	3 (2 digital inputs + 1 digital/analog input)
Digital input type		24VDC (no need for external feeder) 1 input for start, 1 input programmable (stop, free-wheel stopping, external alarm, motor preheat, local control, alarms inhibit, manual resetting of motor thermal protection, keypad lock, second motor), 1 input programmable multifunction (OFF, free-wheel stopping, external alarm, motor preheat, local control, alarms inhibit, manual resetting of motor thermal protection, keypad lock, second motor, cascade starting, 0-10V ramp, 2-10V ramp, 0-10V start-stop, PT100 start-stop, PTC protection)
Digital input functions		(OFF, free-wheel stopping, external alarm, motor preheat, local control, alarms inhibit, manual resetting of motor thermal protection, keypad lock, second motor, cascade starting, 0-10V ramp, 2-10V ramp, 0-10V start-stop, PT100 start-stop, PTC protection)

Analog inputs

Number of analog input	Nr.	1 (digital/analog) 0-10VDC (0-20mA with external resistor 500Ω)
Analog input type		0-10VDC (0-20mA with external resistor 500Ω)

	Analog input functions		Motor protection via PTC probes, acceleration and/or deceleration ramp via analog input, analog input thresholds for motor starting and stopping, analog input thresholds for programmable relay enable and disable, PT100 input thresholds for motor starting and stopping and PT100 input thresholds for programmable relay enable and disable
<hr/>			
Digital outputs	Number of digital output	Nr.	4
	Digital output arrangement		3 x 1 NO (SPST) + 1 C/O (SPDT) Ratings: 5A 250VAC AC1, 2A 250VAC AC15 C/O output for global alarm, 3 x 1NO outputs programmable (OFF, motor powered, up to speed, braking, current limit, service required, cascade starting, programmable input thresholds, alarm Axx)
	Digital output functions		
<hr/>			
Analog outputs	Number of analog output	Nr.	1
	Analog output type		0...20mA, 4...20mA (0...10V with external resistor 500Ω) Current, torque, motor thermal status, power factor and active power
	Analog output functions		

Ambient conditions


Temperature

Operating temperature

min °C -10

	max	°C	+55°C (with current derating >45°C of 1.5%/°C)
Storage temperature	min max	°C °C	-30 +70
Max altitude		m	1000 without derating (over 1000mt with current derating of 0.5%/100m)
Relative humidity		%	95% without condensation or dripping
Pollution degree			3
Housing			
Mounting			Screw-fixing
IP degree of protection			IP20
Dimensions (W x H x D)		mm	157 x 372 x 223
Weight		Kg	9.24

Dimensions

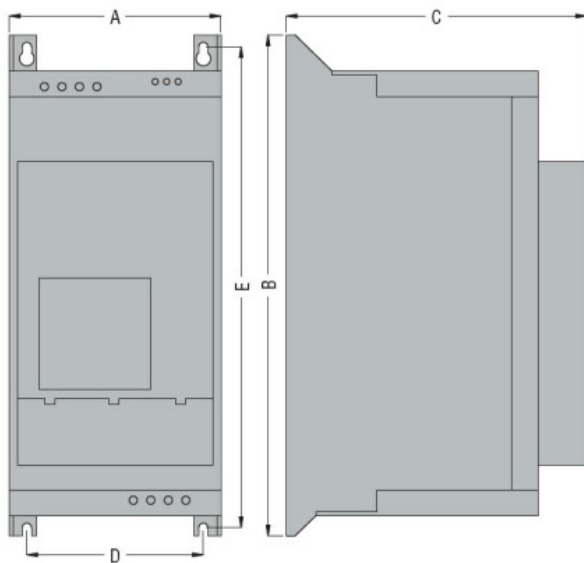

TYPE	A	B	C	D	E
ADX 0017B	157 (6.18")	372 (14.64")	223 (8.78")	131 (5.16")	357 (14.05")
ADX 0030B	157 (6.18")	372 (14.64")	223 (8.78")	131 (5.16")	357 (14.05")
ADX 0045B	157 (6.18")	372 (14.64")	223 (8.78")	131 (5.16")	357 (14.05")
ADX 0060B	157 (6.18")	534 (21.02")	250 (9.84")	132 (5.20")	517 (20.35")
ADX 0075B	157 (6.18")	534 (21.02")	250 (9.84")	132 (5.20")	517 (20.35")
ADX 0085B	157 (6.18")	534 (21.02")	250 (9.84")	132 (5.20")	517 (20.35")
ADX 0110B	157 (6.18")	584 (22.99")	250 (9.84")	132 (5.20")	567 (22.32")
ADX 0125B	157 (6.18")	584 (22.99")	250 (9.84")	132 (5.20")	567 (22.32")

Certifications and compliance

Compliance

IEC/EN 60947-1
IEC/EN 60947-4-2

Certificates

EAC

ETIM classification

ETIM 8.0

EC000640 - Soft starter