



Product designation Product type designation				Soft Starter ADX Asynchronous
Motor type				three phase
Electrical features				
Supplies voltage				
		Type of system		Three phase
		Rated supply voltage	V	208415VAC
		auxiliary supply voltage (Us)		208240VAC
		Rated frequency	Hz	50/60
Rated starter current le			А	568
Rated motor power				
IEC rat	tings (T≤40°C)			
		230VAC	kW	160
		400VAC	kW	315
		500VAC	KW	400
UL rati	ngs (T≤40°C)			
		220-240VAC	HP	200
		380-415VAC	HP	350
		440-480VAC	HP	400
Number of controlled phases			Nr.	3
Built-in bypass				No, predisposed for external
				bypass contactor
Cooling System				Forced
Programming interface				
Display				Backlit LCD 2x16 character
Programming with NFC technol	logy			No
Optical port				No
Startup and stop settings				
Startup method				Torque or voltage ramp with current limitation
Stop method				Torque ramp, voltage ramp, free-wheel stop
Braking method				DC dynamic with external relay
Protections				
Auxiliary supply protection				Voltage too low

Auxiliary supply protection

Voltage too low



Power supply Protection	No power, phase loss, phase sequence, frequency out of limits, minimum and maximum voltage
Motor protection	Overload at starting (trip class 2, 10A, 10, 15, 20, 25, 30, 35 and 40), overload during running (trip class 2, 10A, 10, 15, 20, 25 and 30), locked rotor, current asymmetry, minimum torque (dry run), overtemperature , starting too long Overcurrent,
Starter protection	overtemperature, bypass failure, phase shorted, temperature sensor fault, maintenance request
Functions	
Built-in bypass	3
Built-in display and keypad	No
	Yes
Languages	100
Languages View measurements	4
View measurements	4
View measurements Torque control	4 Yes
View measurements Torque control Adjustable current limit	4 Yes Yes
View measurements Torque control Adjustable current limit Dynamic braking	4 Yes Yes Yes
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function	4 Yes Yes Yes Yes
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection	4 Yes Yes Yes Yes Yes
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input	4 Yes Yes Yes Yes Yes Yes
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss	4 Yes Yes Yes Yes Yes Yes Yes
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion	4 Yes Yes Yes Yes Yes Yes Yes Yes Yes
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load	4 Yes Yes Yes Yes Yes Yes Yes Yes Yes Yes
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm	4 Yes Yes Yes Yes Yes Yes Yes Yes Yes Yes
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs	4 Yes Yes Yes Yes Yes Yes Yes Yes Yes Yes
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs	4 Yes Yes Yes Yes Yes Yes Yes Yes Yes Yes
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs Digital outputs	4           Yes
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs Digital outputs	4           Yes
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs Digital outputs Analog output Monitoring communication	4           Yes           Yes
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs Digital outputs	4           Yes



gital inputs ital/analog c (no need ernal ) for start, mmable free-whee ng, externa motor
gital inputs ital/analog c (no need ernal ) for start, mmable free-whee ng, extern motor
gital inputs ital/analog c (no need ernal ) for start, mmable free-whee ng, extern motor
ital/analog c (no need ernal ) for start, mmable free-whee ng, extern motor
ital/analog c (no need ernal ) for start, mmable free-whee ng, extern motor
ital/analog c (no need ernal ) for start, mmable free-whee ng, extern motor
C (no need ernal ) for start, mmable free-whee ng, extern motor
ernal ) for start, mmable free-whee ng, extern motor
ernal ) for start, mmable free-whee ng, extern motor
) for start, mmable free-whee ng, externa motor
for start, mmable free-whee ng, externa motor
mmable free-whee ng, externa motor
free-whee ng, externa motor
ng, externa motor
motor
t loool
it, local , alarms
manual
ng of moto
d
tion,
d lock,
d motor),
mmable
nction
free-whee
ng, externa
motor
it, local
, alarms manual
ng of mote
d
tion,
d lock,
d motor,
le starting ramp, 2-
mp, 0-10
mp, 0-10 <sup>v</sup> top, PT10
mp, 0-10 <sup>v</sup> top, PT10 top, PTC tion)
mp, 0-10 top, PT10 top, PTC tion) al/analog)
mp, 0-10 <sup>\</sup> top, PT10 top, PTC tion) al/analog) DC (0-
mp, 0-10 top, PT10 top, PTC tion) al/analog)

# 51ADX0568




## SOFT STARTER, ADX... TYPE, FOR SEVERE DUTY (STARTING CURRENT 5•IE). PREDISPOSED FOR EXTERNAL BY-PASS CONTACTOR, 568A

Digital outputs		Analog input functions		Motor protection via PTC probes, acceleration and/or deceleration ramp via analog input, analog input thresholds for motor starting and stopping, analog input thresholds for programmable relay enable and disable, PT100 input thresholds for motor starting and stopping and PT100 input thresholds for programmable relay enable and disable, relay enable and disable
		Number of digital output	Nr.	4 3 x 1 NO (SPST)
		Digital output arrangement		+ 1 C/O (SPDT) Ratings: 5A 250VAC AC1, 2A 250VAC AC15 C/O output for
		Digital output functions		global alarm, 3 x 1NO outputs programmable (OFF, motor powered, up to speed, braking, current limit, service required, cascade starting, programmable input thresholds, alarm Axx)
Analog outputs		Number of analog output	Nr.	1
		Analog output type		020mA, 420mA (010V with external resistor 500Ω)
Ambient conditions		Analog output functions		Current, torque, motor thermal status, power factor and active power
Temperature				
	Operating temperature	min	°C	-10



	max	°C	+55°C (with current derating >45°C of 1.5%/ °C )
Storage temperature			
	min	°C	-30
	max	°C	+70
Max altitude		m	1000 without derating (over 1000mt with current derating of 0.5%/100m)
Relative humidity		%	95% without condensation or dripping
Pollution degree			3
Housing			
Mounting			Screw-fixing
IP degree of protection			IP00
Dimensions (W x H x D)		mm	790 x 650 x 430
Weight		Kg	95

Dimensions

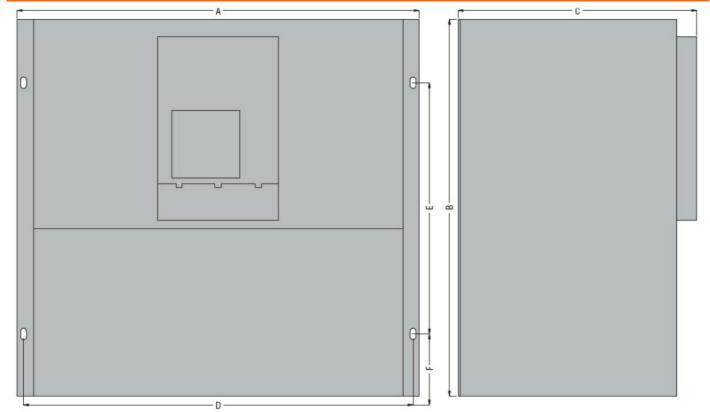

TYPE	A	В	C	D	E	F
ADX 0310	640 (25.20")	600 (23.62")	380 (14.96")	620 (24.41")	400 (15.75")	100 (3.94")
ADX 0365	640 (25.20")	600 (23.62")	380 (14.96")	620 (24.41")	400 (15.75")	100 (3.94")
ADX 0470	790 (31.10")	650 (25.59")	430 (16.93")	770 (30.31")	450 (17.72")	100 (3.94")
ADX 0568	790 (31.10")	650 (25.59")	430 (16.93")	770 (30.31")	450 (17.72")	100 (3.94")
ADX 0640	790 (31.10")	650 (25.59")	430 (16.93")	770 (30.31")	450 (17.72")	100 (3.94")
ADX 0820	910 (35.83")	950 (37.40")	442 (17.40")	830 (32.68")	920 (36.22")	0
ADX 1200	910 (35.83")	950 (37.40")	442 (17.40")	830 (32.68")	920 (36.22")	0
Consult Customer Service; see contact details on inside front cover.						



Certifications and cor	npliance	
Compliance		
	IEC/EN 60947-1	
	IEC/EN 60947-4-2	
Certificates		
	EAC	
ETIM classification		
ETIM 8.0		EC000640 - Soft starter