



Product designation Product type designa	tion			Soft Starter ADX Asynchronous
Motor type				three phase
Electrical features				
Supplies voltage				
		Type of system		Three phase
		Rated supply voltage	V	208415VAC
		auxiliary supply voltage (Us)		208240VAC
		Rated frequency	Hz	50/60
Rated starter current	le		Α	1200
Rated motor power				
	IEC ratings (T≤40°C)			
		230VAC	kW	355
		400VAC	kW	710
		500VAC	KW	800
	UL ratings (T≤40°C)			
		220-240VAC	HP	450
		380-415VAC	HP	900
		440-480VAC	HP	900
Number of controlled	phases		Nr.	3
				No, predisposed
Built-in bypass				for external
				bypass contactor
Cooling System				Forced
Programming interfac	ce de la companya de			
Display				Backlit LCD 2x16
				character
Programming with NF	C technology			No
Optical port				No
Startup and stop setti	ings			
				Torque or voltage
Startup method				ramp with current limitation
_				Torque ramp,
Stop method				voltage ramp,
				free-wheel stop
Braking method				DC dynamic with
-				external relay
Protections				
Auxiliary supply prote	oction			Voltage too low

Auxiliary supply protection

Voltage too low



Power supply Protection	No power, phase loss, phase sequence, frequency out of limits, minimum and maximum voltage
Motor protection	Overload at starting (trip class 2, 10A, 10, 15, 20, 25, 30, 35 and 40), overload during running (trip class 2, 10A, 10, 15, 20, 25 and 30), locked rotor, current asymmetry, minimum torque (dry run), overtemperature , starting too long Overcurrent,
Starter protection	Overcurrent, overtemperature, bypass failure, phase shorted, temperature sensor fault, maintenance request
Functions	
Built-in bypass	3
Built-in display and keypad	No
	No.
Languages	Yes
Languages View measurements	4 Yes
View measurements Torque control	
View measurements Torque control Adjustable current limit	4 Yes Yes
View measurements Torque control Adjustable current limit Dynamic braking	4 Yes Yes Yes
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function	4 Yes Yes Yes Yes
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection	4 Yes Yes Yes Yes Yes
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input	4 Yes Yes Yes Yes Yes Yes
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss	4 Yes Yes Yes Yes Yes Yes Yes
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion	4 Yes Yes Yes Yes Yes Yes Yes Yes
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor	4 Yes Yes Yes Yes Yes Yes Yes Yes Yes Yes
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature	4 Yes Yes Yes Yes Yes Yes Yes Yes Yes Yes
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load	4 Yes Yes Yes Yes Yes Yes Yes Yes Yes Yes
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm	4 Yes Yes Yes Yes Yes Yes Yes Yes Yes Yes
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs	4 Yes Yes Yes Yes Yes Yes Yes Yes Yes Yes
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs	4 Yes Yes Yes Yes Yes Yes Yes Yes Yes Yes
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs Digital outputs	4           Yes
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs Digital outputs	4           Yes
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs Digital outputs Analog output Monitoring communication	4           Yes           Yes
View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs Digital outputs	4           Yes



Startup counter			Yes
Clock calendar			Yes
Remote external keypad			Yes
Plug-in version			Optional
Input and Output			
Digital inputs			
	Number of digital input Digital input type	Nr.	3 (2 digital inputs + 1 digital/analog input) 24VDC (no need for external feeder) 1 input for start, 1 input programmable (stop, free-wheel stopping, external alarm, motor preheat, local control, alarms inhibit, manual resetting of motor thermal protection, keypad lock, second motor), 1 input programmable multifunction (OFF, free-wheel stopping, external alarm, motor preheat, local control, alarms inhibit, manual resetting of motor
Analog inputs			thermal protection, keypad lock, second motor, cascade starting, 0-10V ramp, 2- 10V ramp, 0-10V start-stop, PT100 start-stop, PTC protection)
	Number of analog input	Nr.	1 (digital/analog) 0-10VDC (0- 20mA with
	Analog input type		external resistor $500\Omega$ )

# 51ADX1200




# SOFT STARTER, ADX... TYPE, FOR SEVERE DUTY (STARTING CURRENT 5•IE). PREDISPOSED FOR EXTERNAL BY-PASS CONTACTOR, 1200A

Digital outputs	unctions		Motor protection via PTC probes, acceleration and/or deceleration ramp via analog input, analog input thresholds for motor starting and stopping, analog input thresholds for programmable relay enable and disable, PT100 input thresholds for motor starting and stopping and PT100 input thresholds for programmable relay enable and disable
Number of digita	al output	Nr.	4 3 x 1 NO (SPST)
Digital output arran	igement		+ 1 C/O (SPDT) Ratings: 5A 250VAC AC1, 2A 250VAC AC15 C/O output for
Digital output fu	unctions		global alarm, 3 x 1NO outputs programmable (OFF, motor powered, up to speed, braking, current limit, service required, cascade starting, programmable input thresholds, alarm Axx)
Analog outputs Number of analog	g output	Nr.	1
Analog out	put type		020mA, 420mA (010V with external resistor 500Ω)
Analog output fu	unctions		Current, torque, motor thermal status, power factor and active power
Temperature			
Operating temperature	min	°C	-10



	max	°C	+55°C (with current derating >45°C of 1.5%/ °C )
Storage temperature			
	min	°C	-30
	max	°C	+70
Max altitude		m	1000 without derating (over 1000mt with current derating of 0.5%/100m)
Relative humidity		%	95% without condensation or dripping
Pollution degree			3
Housing			
Mounting			Screw-fixing
IP degree of protection			IP00
Dimensions (W x H x D)		mm	910 x 950 x 442
Weight		Kg	234

Dimensions

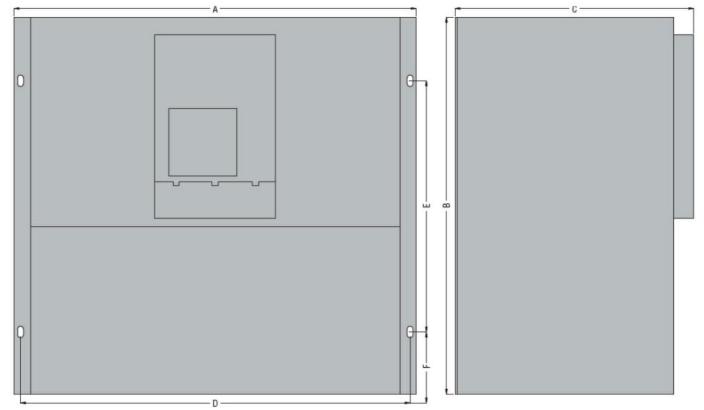

TYPE	A	В	C	D	E	F
ADX 0310	640 (25.20")	600 (23.62")	380 (14.96")	620 (24.41")	400 (15.75")	100 (3.94")
ADX 0365	640 (25.20")	600 (23.62")	380 (14.96")	620 (24.41")	400 (15.75")	100 (3.94")
ADX 0470	790 (31.10")	650 (25.59")	430 (16.93")	770 (30.31")	450 (17.72")	100 (3.94")
ADX 0568	790 (31.10")	650 (25.59")	430 (16.93")	770 (30.31")	450 (17.72")	100 (3.94")
ADX 0640	790 (31.10")	650 (25.59")	430 (16.93")	770 (30.31")	450 (17.72")	100 (3.94")
ADX 0820	910 (35.83")	950 (37.40")	442 (17.40")	830 (32.68")	920 (36.22")	0
ADX 1200	910 (35.83")	950 (37.40")	442 (17.40")	830 (32.68")	920 (36.22")	0
Consult Customer Service; see contact details on inside front cover.						



Certifications and cor	npliance	
Compliance		
	IEC/EN 60947-1	
	IEC/EN 60947-4-2	
Certificates		
	EAC	
ETIM classification		
ETIM 8.0		EC000640 - Soft starter