## ADXT013924



SOFT STARTER, ADXT... SERIES, FOR STANDARD AND HEAVY-DUTY APPLICATIONS, WITH BUILT-IN BYPASS RELAY. AUXILIARY SUPPLY VOLTAGE 24VAC/DC. RATED OPERATIONAL VOLTAGE 380...690VAC, 139A



Product designation	Soft Starter
Product type designation	ADXT
Motor type	Asynchronous three phase
Electrical features	

Supplies voltage

Supplies voltage			
	Type of system		Three phase
	Rated supply voltage	V	380690VAC
	auxiliary supply voltage (Us)		24VAC/DC
	Rated frequency	Hz	50/60
Rated starter current le		А	139
Rated motor power			
IEC ratings (T≤40°C)			
	400VAC	kW	110
	500VAC	KW	132
UL ratings (T≤40°C)			
	380-415VAC	HP	125
	440-480VAC	HP	150
	550-600VAC	HP	200
Number of controlled phases		Nr.	3
Built-in bypass			Yes
Cooling System			Forced
Rated insulation voltage Ui		V	690
Programming interface			
Display			LCD graphic
			display
Programming with NFC technology			No
Optical port			No
Startup and stop settings			
			Constant current,
Startup method			current ramp,
			voltage ramp,
			adaptive control
			Voltage ramp,
			adaptive control,
Stop method			free-wheel stop,
•			DC braking, soft
			stop with braking
			contactor
Protections			
Auxiliary supply protection			Voltage too low
			No power, phase
			loss, phase
Power supply Protection			sequence,
· · · · · · · · · · · · · · · · · · ·			frequency out of
			limits, voltage out
			of limits

ADXT013924

## ADXT013924



SOFT STARTER, ADXT... SERIES, FOR STANDARD AND HEAVY-DUTY APPLICATIONS, WITH BUILT-IN BYPASS RELAY. AUXILIARY SUPPLY VOLTAGE 24VAC/DC. RATED OPERATIONAL VOLTAGE 380...690VAC, 139A

Motor protection			Overload, locked rotor, current asymmetry, current too low, power too low, overtemperature, starting too long
Starter protection			Overcurrent, overtemperature, phase shorted
Functions			
Built-in bypass			Yes
Built-in display and keypad			Yes
Languages			6
View measurements			Yes
Torque control			No
Adjustable current limit			Yes
Dynamic braking			Yes
Kick Start function			Yes
Motor overload electronic protection			Yes
Motor protection PTC input			Thermistor input
Protection against phase loss			Yes
Protection against phase inversion			Yes
Protection against locked rotor			Yes
Protection against thyristor overtemperature			Yes
Protection against low load			Yes
Programmable alarm			Yes
Digital inputs			4
Analog inputs			0
Digital outputs			3
Analog output			1
Optical port for programming			No
Event log			Yes
Motor hour counter			Yes
Startup counter			Yes
Clock calendar			Yes
Remote external keypad			Yes
Input and Output			
Digital inputs			
	Number of digital input	Nr.	4
	Digital input type		4 input with dry contact + 1
	Digital input functions		thermistor input 1x Start/Stop, 1x Reset and 2 Programmable
Digital outputs			
	Number of digital output Digital output arrangement	Nr.	3 2x 1NO + 1x C/O 1NO Line contactor + 1NO
	Digital output functions		Programmable + 1C/O Programmable

## ADXT013924




SOFT STARTER, ADXT... SERIES, FOR STANDARD AND HEAVY-DUTY APPLICATIONS, WITH BUILT-IN BYPASS RELAY. AUXILIARY SUPPLY VOLTAGE 24VAC/DC. RATED OPERATIONAL VOLTAGE 380...690VAC, 139A

ENERGY AND AUTOMATION

Ambient conditions

Operating	temperature			
		min	°C	-10
				+60°C (with
		max	°C	current derating >40°C)
Storage te	emperature			
		min	°C	-25
		max	°C	+60
Max altitude			m	1000 without
			111	derating
Relative humidity			%	<95%
Pollution degree				3
Housing				
Mounting				Screw-fixing
IP degree of protection				IP00
Dimensions (W x H x D)			mm	216x495x244
Weight			Kg	12.7
Dimonsions				

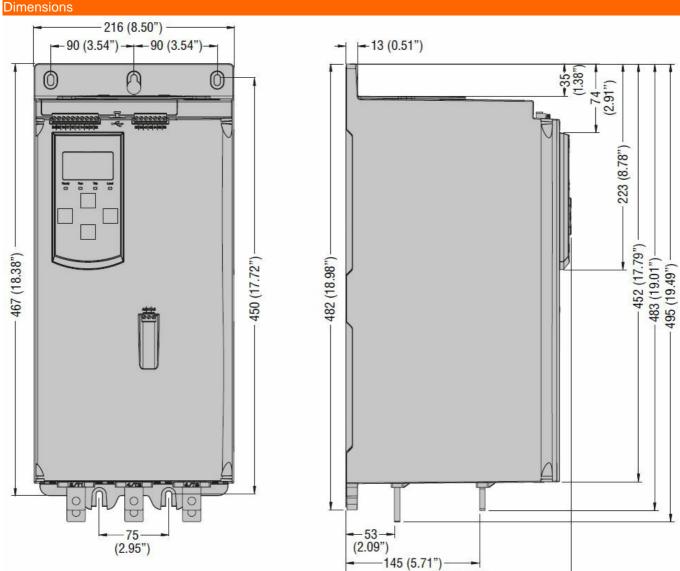

244 (9.61")



ENERGY AND AUTOMATION

ADXT013924 SOFT STARTER, ADXT... SERIES, FOR STANDARD AND HEAVY-DUTY APPLICATIONS, WITH BUILT-IN BYPASS RELAY. AUXILIARY SUPPLY VOLTAGE 24VAC/DC. RATED OPERATIONAL VOLTAGE 380...690VAC, 139A

Certifications and compliance			
Compliance			
	CSA C22.2 n°60947-4-2		
	IEC/EN/BS 60947-4-2		
	UL 60947-4-2		
Certificates			
	cULus		
	RCM		
ETIM classificati	on		
ETIM 8.0		EC000640 - Soft starter	

starter

ADXT013924