

SOFT STARTER, ADXT... SERIES, FOR STANDARD AND HEAVY-DUTY APPLICATIONS, WITH BUILT-IN BYPASS RELAY. AUXILIARY SUPPLY VOLTAGE 110...120VAC AND 220...240VAC. RATED OPERATIONAL VOLTAGE 380...690VAC, 165A



ADXT0165

Product designation Product type designat Motor type	tion			Soft Starter ADXT Asynchronous three phase
Electrical features				
Supplies voltage		Type of system Rated supply voltage auxiliary supply voltage (Us)	V	Three phase 380690VAC 110120VAC /
		· · · · · · · · · ·	U	220240VAC 50/60
Rated starter current		Rated frequency	Hz A	165
Rated motor power				105
	IEC ratings (T≤40°C)			
	c.ag. (.=.c.c)	400VAC 500VAC	kW KW	132 160
	UL ratings (T≤40°C)			
		380-415VAC	HP	150
		440-480VAC	HP	200
		550-600VAC	HP	250
Number of controlled	phases		Nr.	3
Built-in bypass				Yes
Cooling System				Forced
Rated insulation voltage			V	690
Programming interfac	e			
Display				LCD graphic display
Programming with NF	C technology			No
Optical port				No
Startup and stop setti Startup method Stop method	ngs			Constant current, current ramp, voltage ramp, adaptive control Voltage ramp, adaptive control, free-wheel stop,
Protections				DC braking, soft stop with braking contactor
Auxiliary supply prote	ction			Voltage too low



ADXT0165 SOFT STARTER, ADXT... SERIES, FOR STANDARD AND HEAVY-DUTY APPLICATIONS, WITH BUILT-IN BYPASS RELAY. AUXILIARY SUPPLY VOLTAGE 110...120VAC AND 220...240VAC. RATED OPERATIONAL VOLTAGE 380...690VAC, 165A

Power supply Protection			No power, phase loss, phase sequence, frequency out of limits, voltage out of limits
Motor protection			Overload, locked rotor, current asymmetry, current too low, power too low, overtemperature, starting too long Overcurrent,
Starter protection			overtemperature, phase shorted
Functions			·
Built-in bypass			Yes
Built-in display and keypad			Yes
Languages			6
View measurements			Yes
Torque control			No
Adjustable current limit			Yes
Dynamic braking			Yes
Kick Start function			Yes
Motor overload electronic protection			Yes
Motor protection PTC input			Thermistor input
Protection against phase loss			Yes
Protection against phase inversion			Yes
Protection against locked rotor			Yes
Protection against thyristor overtemperature			Yes
Protection against low load			Yes
Programmable alarm			Yes
Digital inputs			4
Analog inputs			0
Digital outputs			3
Analog output			1
Optical port for programming			No
Event log			Yes
Motor hour counter			Yes
Startup counter			Yes
Clock calendar			Yes
Remote external keypad			Yes
Input and Output			
Digital inputs			
	Number of digital input	Nr.	4
	Digital input type		4 input with dry contact + 1 thermistor input 1x Start/Stop, 1x
	Digital input functions		Reset and 2 Programmable
Digital outputs	Number of digital output	Nr.	3

ADXT0165





SOFT STARTER, ADXT... SERIES, FOR STANDARD AND HEAVY-DUTY APPLICATIONS, WITH BUILT-IN BYPASS RELAY. AUXILIARY SUPPLY VOLTAGE 110...120VAC AND 220...240VAC. RATED OPERATIONAL VOLTAGE 380...690VAC, 165A


		Digital output arrangement Digital output functions		2x 1NO + 1x C/O 1NO Line contactor + 1NO Programmable + 1C/O Programmable
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-10
				+60°C (with
		max	°C	current derating
				>40°C)
	Storage temperature			
		min	°C	-25
		max	°C	+60
Max altitude			m	1000 without derating
Relative humidity			%	<95%
Pollution degree				3
Housing				
Mounting				Screw-fixing
IP degree of protection				IP00
Dimensions (W x H x D)			mm	216x495x244
Weight			Kg	12.7
Dimensions				

ADXT0165



SOFT STARTER, ADXT... SERIES, FOR STANDARD AND HEAVY-DUTY APPLICATIONS, WITH BUILT-IN BYPASS RELAY. AUXILIARY SUPPLY VOLTAGE 110...120VAC AND 220...240VAC. RATED OPERATIONAL VOLTAGE 380...690VAC, 165A



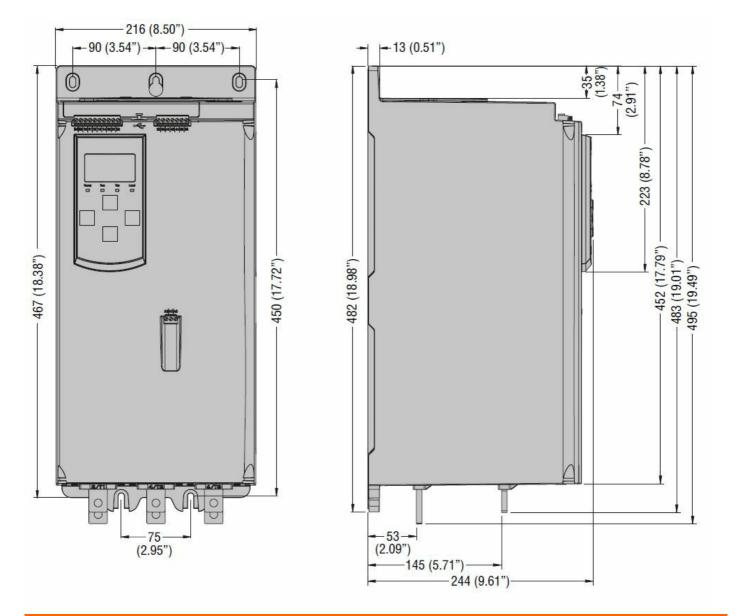

Certifications and compliance Compliance CSA C22 2 n°60947-4-2

	CSA C22.2 II 00947-4-2	
	IEC/EN/BS 60947-4-2	
	UL 60947-4-2	
Certificates		
	cULus	
	RCM	
ETIM classification	on	
ETIMOO		EC000640 - Soft

ETIM 8.0

starter

ADXT0165