



Product designation
Product type designation
Motor type

Soft Starter
ADXT
Asynchronous
three phase

Electrical features

Supplies voltage	Type of system		Three phase
	Rated supply voltage	V	380...690VAC
	auxiliary supply voltage (Us)		110...120VAC / 220...240VAC
	Rated frequency	Hz	50/60
Rated starter current Ie		A	187
Rated motor power	IEC ratings (T≤40°C)		
		400VAC kW	160
		500VAC KW	200
	UL ratings (T≤40°C)		
		380-415VAC HP	150
		440-480VAC HP	200
		550-600VAC HP	250
Number of controlled phases		Nr.	3
Built-in bypass			Yes
Cooling System			Forced
Rated insulation voltage Ui		V	690

Programming interface

Display	LCD graphic display
Programming with NFC technology	No
Optical port	No

Startup and stop settings

Startup method	Constant current, current ramp, voltage ramp, adaptive control
Stop method	Voltage ramp, adaptive control, free-wheel stop, DC braking, soft stop with braking contactor

Protections

Auxiliary supply protection	Voltage too low
-----------------------------	-----------------

Power supply Protection	No power, phase loss, phase sequence, frequency out of limits, voltage out of limits
Motor protection	Overload, locked rotor, current asymmetry, current too low, power too low, overtemperature, starting too long
Starter protection	Overcurrent, overtemperature, phase shorted

Functions	
Built-in bypass	Yes
Built-in display and keypad	Yes
Languages	6
View measurements	Yes
Torque control	No
Adjustable current limit	Yes
Dynamic braking	Yes
Kick Start function	Yes
Motor overload electronic protection	Yes
Motor protection PTC input	Thermistor input
Protection against phase loss	Yes
Protection against phase inversion	Yes
Protection against locked rotor	Yes
Protection against thyristor overtemperature	Yes
Protection against low load	Yes
Programmable alarm	Yes
Digital inputs	4
Analog inputs	0
Digital outputs	3
Analog output	1
Optical port for programming	No
Event log	Yes
Motor hour counter	Yes
Startup counter	Yes
Clock calendar	Yes
Remote external keypad	Yes

Input and Output			
Digital inputs	Number of digital input	Nr.	4
	Digital input type		4 input with dry contact + 1 thermistor input
	Digital input functions		1x Start/Stop, 1x Reset and 2 Programmable

Digital outputs	Number of digital output	Nr.	3
-----------------	--------------------------	-----	---

SOFT STARTER, ADXT... SERIES, FOR STANDARD AND HEAVY-DUTY APPLICATIONS, WITH BUILT-IN BYPASS RELAY. AUXILIARY SUPPLY VOLTAGE 110...120VAC AND 220...240VAC. RATED OPERATIONAL VOLTAGE 380...690VAC, 187A

Digital output arrangement	2x 1NO + 1x C/O 1NO Line contactor + 1NO
Digital output functions	Programmable + 1C/O Programmable

Ambient conditions

Temperature

Operating temperature

min	°C	-10
max	°C	+60°C (with current derating >40°C)

Storage temperature


min	°C	-25
max	°C	+60

Max altitude	m	1000 without derating
Relative humidity	%	<95%
Pollution degree		3

Housing

Mounting		Screw-fixing
IP degree of protection		IP00
Dimensions (W x H x D)	mm	216x495x244
Weight	Kg	12.7

Dimensions

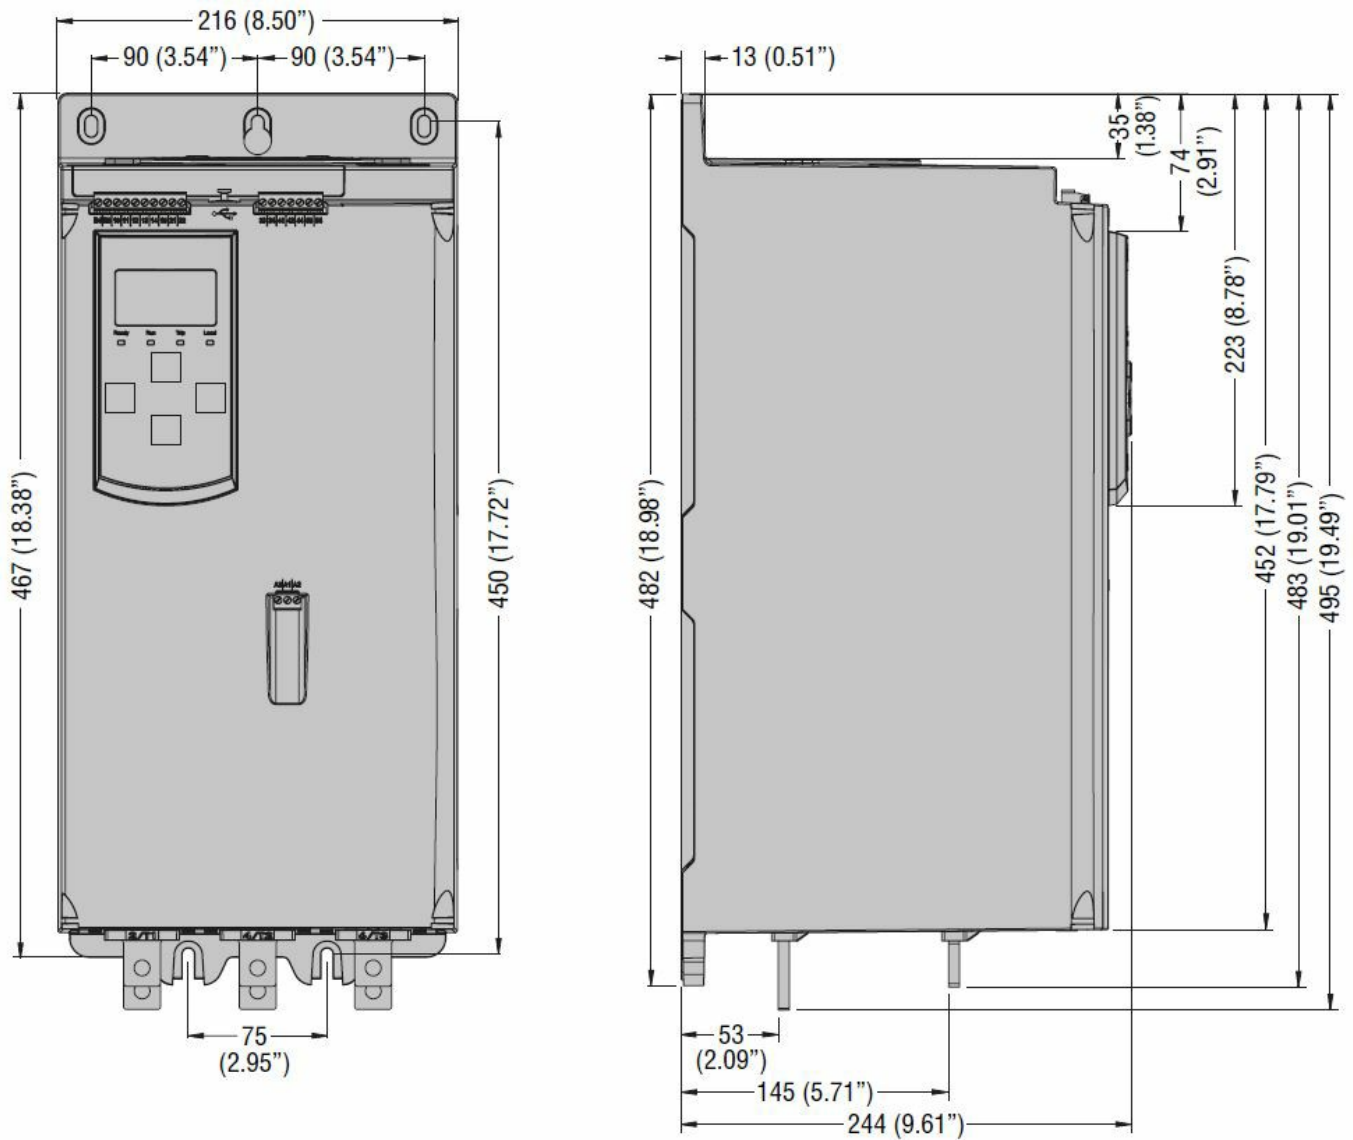

Certifications and compliance

Compliance

CSA C22.2 n°60947-4-2

IEC/EN/BS 60947-4-2

UL 60947-4-2

Certificates

cULus

RCM

ETIM classification

ETIM 8.0

EC000640 - Soft starter