

SOFT STARTER, ADXT... SERIES, FOR STANDARD AND HEAVY-DUTY APPLICATIONS, WITH BUILT-IN BYPASS RELAY. AUXILIARY SUPPLY VOLTAGE 110...120VAC AND 220...240VAC. RATED OPERATIONAL VOLTAGE 380...690VAC, 230A



ADXT0230

Product designation Product type designation Motor type			Soft Starter ADXT Asynchronous three phase
Electrical features			
Supplies voltage			
	Type of system		Three phase
	Rated supply voltage	V	380690VAC
	auxiliary supply voltage (Us)		110120VAC / 220240VAC
	Rated frequency	Hz	50/60
Rated starter current le		A	230
Rated motor power			
IEC ratings (T≤40°C)			
	400VAC	kW	160
	500VAC	KW	250
UL ratings (T≤40°C)			
	380-415VAC	HP	200
	440-480VAC	HP	250
Number of controlled phones	550-600VAC	HP	350
Number of controlled phases		Nr.	3 Yes
Built-in bypass Cooling System			Forced
Rated insulation voltage Ui		V	690
Programming interface		V	690
			LCD graphic
Display			display
Programming with NFC technology			No
Optical port			No
Startup and stop settings			
Startup method			Constant current, current ramp, voltage ramp, adaptive control
Stop method			Voltage ramp, adaptive control, free-wheel stop, DC braking, soft stop with braking contactor
Protections			
Auxiliary supply protection			Voltage too low



ADXT0230 SOFT STARTER, ADXT... SERIES, FOR STANDARD AND HEAVY-DUTY APPLICATIONS, WITH BUILT-IN BYPASS RELAY. AUXILIARY SUPPLY VOLTAGE 110...120VAC AND 220...240VAC. RATED OPERATIONAL VOLTAGE 380...690VAC, 230A

Power supply Protection			No power, phase loss, phase sequence, frequency out of limits, voltage out
			of limits
Motor protection			Overload, locked rotor, current asymmetry, current too low, power too low, overtemperature, starting too long
Starter protection			Overcurrent, overtemperature, phase shorted
Functions			F
Built-in bypass			Yes
Built-in display and keypad			Yes
Languages			6
View measurements			Yes
Torque control			No
Adjustable current limit			Yes
Dynamic braking			Yes
Kick Start function			Yes
Motor overload electronic protection			Yes
Motor protection PTC input			Thermistor input
Protection against phase loss			Yes
Protection against phase inversion			Yes
Protection against locked rotor			Yes
Protection against thyristor overtemperature			Yes
Protection against low load			Yes
Programmable alarm			Yes
Digital inputs			4
Analog inputs			0
Digital outputs			3
Analog output			1
Optical port for programming			No
Event log			Yes
Motor hour counter			Yes
Startup counter			Yes
Clock calendar			Yes
Remote external keypad			Yes
Input and Output			
Digital inputs			
	Number of digital input	Nr.	4
	Digital input type		4 input with dry contact + 1 thermistor input 1x Start/Stop, 1x
	Digital input functions		Reset and 2 Programmable
Digital outputs	Number of digital output	Nr.	3

ADXT0230






SOFT STARTER, ADXT... SERIES, FOR STANDARD AND HEAVY-DUTY APPLICATIONS, WITH BUILT-IN BYPASS RELAY. AUXILIARY SUPPLY VOLTAGE 110...120VAC AND 220...240VAC. RATED OPERATIONAL VOLTAGE 380...690VAC, 230A


		Digital output arrangement Digital output functions		2x 1NO + 1x C/O 1NO Line contactor + 1NO Programmable + 1C/O Programmable
Ambient conditions				
Temperature	Operating temperature			
		min	°C	-10
				+60°C (with
		max	°C	current derating >40°C)
	Storage temperature			
		min	°C	-25
		max	°C	+60
Max altitude			m	1000 without derating
Relative humidity			%	<95%
Pollution degree				3
Housing				
Mounting				Screw-fixing
IP degree of protection				IP00
Dimensions (W x H x	D)		mm	216x495x244
Weight			Kg	12.7
Dimensions				

ADXT0230



SOFT STARTER, ADXT... SERIES, FOR STANDARD AND HEAVY-DUTY APPLICATIONS, WITH BUILT-IN BYPASS RELAY. AUXILIARY SUPPLY VOLTAGE 110...120VAC AND 220...240VAC. RATED OPERATIONAL VOLTAGE 380...690VAC, 230A



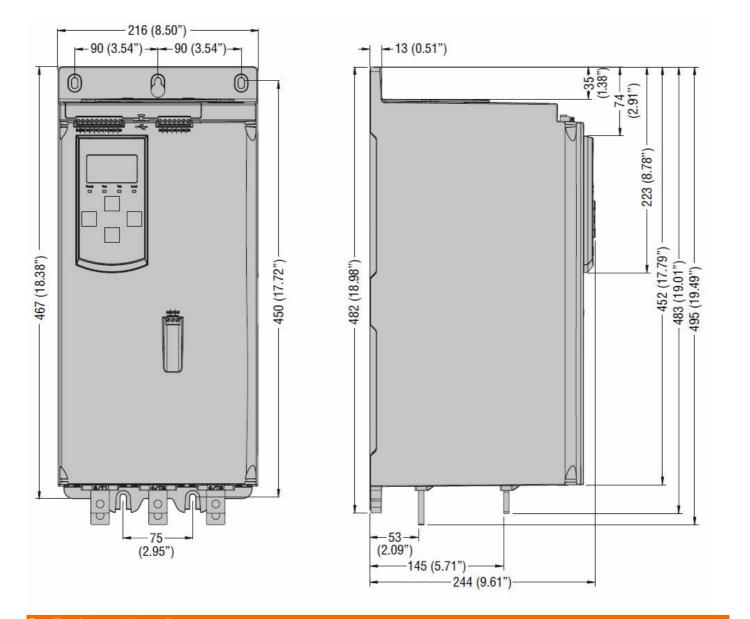

Certifications and compliance Compliance CSA C22.2 n°60947-4-2 IEC/EN/BS 60947-4-2 UL 60947-4-2

Certificates

cULus RCM

ETIM classification

ETIM 8.0

EC000640 - Soft starter

ADXT0230