

SOFT STARTER, ADXT... SERIES, FOR STANDARD AND HEAVY-DUTY APPLICATIONS, WITH BUILT-IN BYPASS RELAY. AUXILIARY SUPPLY VOLTAGE 110...120VAC AND 220...240VAC. RATED OPERATIONAL VOLTAGE 380...690VAC, 506A

Product designation Product type designation			Soft Starter ADXT
Motor type			Asynchronous three phase
Electrical features			
Supplies voltage	Type of system Rated supply voltage	V	Three phase 380690VAC 110120VAC /
a	uxiliary supply voltage (Us)		220240VAC
	Rated frequency	Hz	50/60
Rated starter current le		Α	506
Rated motor power IEC ratings (T≤40°C)			
120 ratings (1210 0)	400VAC	kW	400
	500VAC	KW	500
UL ratings (T≤40°C)			
	380-415VAC	HP	400
	440-480VAC	HP	600
	550-600VAC	HP	700
Number of controlled phases		Nr.	3
Built-in bypass			Yes
Cooling System			Forced
Rated insulation voltage Ui		V	690
Programming interface			LOD manhia
Display			LCD graphic display
Programming with NFC technology			No
Optical port			No
Startup and stop settings			
Startup method			Constant current, current ramp, voltage ramp, adaptive control
Stop method			Voltage ramp, adaptive control, free-wheel stop, DC braking, soft stop with braking contactor
Protections			
Auxiliary supply protection			Voltage too low



ENERGY AND AUTOMATION

SOFT STARTER, ADXT... SERIES, FOR STANDARD AND HEAVY-DUTY APPLICATIONS, WITH BUILT-IN BYPASS RELAY. AUXILIARY SUPPLY VOLTAGE 110...120VAC AND 220...240VAC. RATED OPERATIONAL VOLTAGE 380...690VAC, 506A

Power supply Protection		No power, phase loss, phase sequence, frequency out of limits, voltage out of limits
Motor protection		Overload, locked rotor, current asymmetry, current too low, power too low, overtemperature, starting too long Overcurrent,
Starter protection		overtemperature, phase shorted
Functions		
Built-in bypass		Yes
Built-in display and keypad		Yes
Languages		6
View measurements		Yes
Torque control		No
Adjustable current limit		Yes
Dynamic braking		Yes
Kick Start function		Yes
Motor overload electronic protection		Yes
Motor protection PTC input		Thermistor input
Protection against phase loss		Yes
Protection against phase inversion		Yes
Protection against locked rotor		Yes
Protection against thyristor overtemperature		Yes
Protection against low load		Yes
Programmable alarm		Yes
Digital inputs		4
Analog inputs		0
Digital outputs		3
Analog output		1
Optical port for programming		No
Event log		Yes
Motor hour counter		Yes
Startup counter		Yes
Clock calendar		Yes
Remote external keypad		Yes
Input and Output		
Digital inputs		
Number of dig	gital input Nr.	4
		4 input with dry
Digital i	nput type	contact + 1
		thermistor input
Digital input	functions	1x Start/Stop, 1x Reset and 2 Programmable
Digital outputs		. rogrammable
Number of digir	tal output Nr.	3

ADXT0506





SOFT STARTER, ADXT... SERIES, FOR STANDARD AND HEAVY-DUTY APPLICATIONS, WITH BUILT-IN BYPASS RELAY. AUXILIARY SUPPLY VOLTAGE 110...120VAC AND 220...240VAC. RATED OPERATIONAL VOLTAGE 380...690VAC, 506A

> 2x 1NO + 1x C/O Digital output arrangement

> > 1NO Line

contactor + 1NO

Digital output functions Programmable +

1C/O


			Programmable
Ambient conditions			
Temperature			
Operating temperature			
	min	°C	-10
			+60°C (with
	max	°C	current derating
			>40°C)
Storage temperature			
	min	°C	-25
	max	°C	+60
Max altitude		m	1000 without
wax aiiitude		1111	derating
Relative humidity		%	<95%
Pollution degree			3
Housing			
Mounting			Screw-fixing
IP degree of protection			IP00
Dimensions (W x H x D)		mm	216x523x244
Weight		Kg	19
Dimensions			





ENERGY AND AUTOMATION

SOFT STARTER, ADXT... SERIES, FOR STANDARD AND HEAVY-DUTY APPLICATIONS, WITH BUILT-IN BYPASS RELAY. AUXILIARY SUPPLY VOLTAGE 110...120VAC AND 220...240VAC. RATED OPERATIONAL VOLTAGE 380...690VAC, 506A

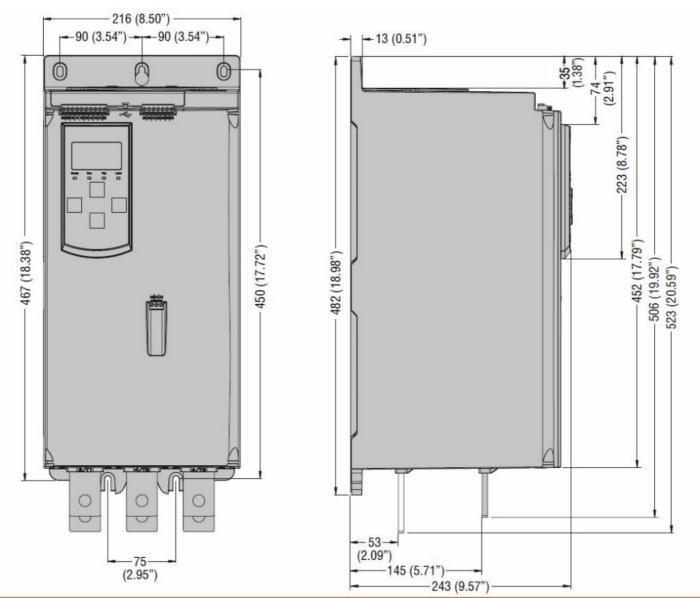

Certifications and compliance

Compliance

CSA C22.2 n°60947-4-2

IEC/EN/BS 60947-4-2

UL 60947-4-2

Certificates

cULus

RCM

ETIM classification

ETIM 8.0

EC000640 - Soft starter