

SOFT STARTER, ADXT... SERIES, FOR STANDARD AND HEAVY-DUTY APPLICATIONS, WITH BUILT-IN BYPASS RELAY. AUXILIARY SUPPLY VOLTAGE 110...120VAC AND 220...240VAC. RATED OPERATIONAL VOLTAGE 380...690VAC, 554A

Product designation Product type designation			Soft Starter ADXT
Motor type			Asynchronous three phase
Electrical features			
Supplies voltage	Type of system Rated supply voltage	V	Three phase 380690VAC 110120VAC /
а	uxiliary supply voltage (Us)		220240VAC
	Rated frequency	Hz	50/60
Rated starter current le		Α	554
Rated motor power IEC ratings (T≤40°C)			
120 failings (1240 0)	400VAC	kW	450
	500VAC	KW	600
UL ratings (T≤40°C)			
	380-415VAC	HP	500
	440-480VAC	HP	600
	550-600VAC	HP	700
Number of controlled phases		Nr.	3
Built-in bypass			Yes
Cooling System			Forced
Rated insulation voltage Ui		V	690
Programming interface			
Display			LCD graphic display
Programming with NFC technology			No
Optical port			No
Startup and stop settings			
Startup method			Constant current, current ramp, voltage ramp, adaptive control
Stop method			Voltage ramp, adaptive control, free-wheel stop, DC braking, soft stop with braking contactor
Protections			
Auxiliary supply protection			Voltage too low



ENERGY AND AUTOMATION

SOFT STARTER, ADXT... SERIES, FOR STANDARD AND HEAVY-DUTY APPLICATIONS, WITH BUILT-IN BYPASS RELAY. AUXILIARY SUPPLY VOLTAGE 110...120VAC AND 220...240VAC. RATED OPERATIONAL VOLTAGE 380...690VAC, 554A

Power supply Protection			No power, phase loss, phase sequence, frequency out of limits, voltage out of limits
Motor protection			rotor, current asymmetry, current too low, power too low, overtemperature, starting too long
Starter protection			Overcurrent, overtemperature, phase shorted
Functions			
Built-in bypass			Yes
Built-in display and keypad			Yes
Languages			6
View measurements			Yes
Torque control			No
Adjustable current limit			Yes
Dynamic braking			Yes
Kick Start function		,	Yes
Motor overload electronic protection			Yes
Motor protection PTC input			Thermistor input
Protection against phase loss			Yes
Protection against phase inversion			Yes
Protection against locked rotor			Yes
Protection against thyristor overtemperature			Yes
Protection against low load			Yes
Programmable alarm			Yes
Digital inputs			4
Analog inputs			0
Digital outputs			3
Analog output			1
Optical port for programming			No
Event log			Yes
Motor hour counter			Yes
Startup counter			Yes
Clock calendar			Yes
Remote external keypad			Yes
Input and Output			
Digital inputs			
	Number of digital input	Nr.	4
			4 input with dry
	Digital input type		contact + 1
			thermistor input
	Digital input functions		1x Start/Stop, 1x Reset and 2 Programmable
Digital outputs			
	Number of digital output	Nr.	3





ENERGY AND AUTOMATION

SOFT STARTER, ADXT... SERIES, FOR STANDARD AND HEAVY-DUTY APPLICATIONS, WITH BUILT-IN BYPASS RELAY. AUXILIARY SUPPLY VOLTAGE 110...120VAC AND 220...240VAC. RATED OPERATIONAL VOLTAGE 380...690VAC, 554A

Digital output arrangement 2x 1NO + 1x C/O

1NO Line

contactor + 1NO

Digital output functions Programmable +

1C/O

Programmable


			Programmable
Ambient conditions			
Temperature			
Operating temperature			
	min	°C	-10
			+60°C (with
	max	°C	current derating
			>40°C)
Storage temperature			
	min	°C	-25
	max	°C	+60
Max altitude		m	1000 without
wax aiiitude			derating
Relative humidity		%	<95%
Pollution degree			3
Housing			
Mounting			Screw-fixing
IP degree of protection			IP00
Dimensions (W x H x D)		mm	216x523x244
Weight		Kg	19
Dimensions			





ENERGY AND AUTOMATION

SOFT STARTER, ADXT... SERIES, FOR STANDARD AND HEAVY-DUTY APPLICATIONS, WITH BUILT-IN BYPASS RELAY. AUXILIARY SUPPLY VOLTAGE 110...120VAC AND 220...240VAC. RATED OPERATIONAL VOLTAGE 380...690VAC, 554A

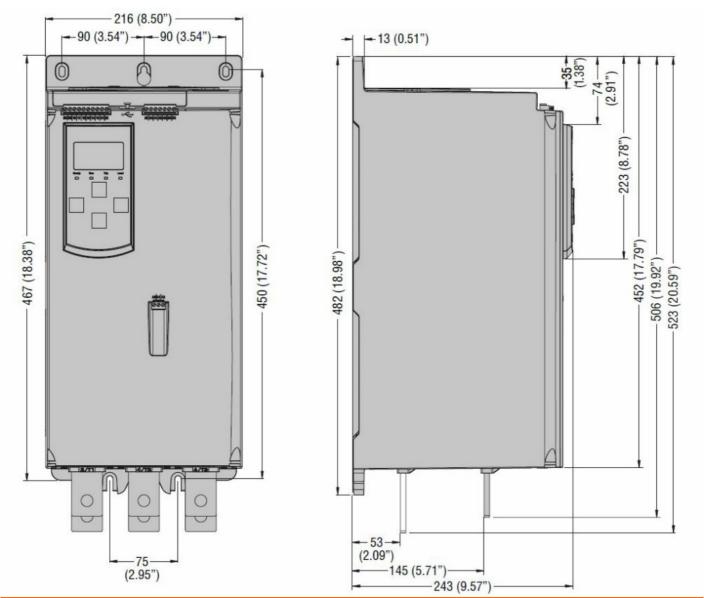

Certifications and compliance

Compliance

CSA C22.2 n°60947-4-2

IEC/EN/BS 60947-4-2

UL 60947-4-2

Certificates

cULus

RCM

ETIM classification

ETIM 8.0

EC000640 - Soft starter