


11BGX78225 QUICK CONNECT SURGE SUPPRESSOR FOR BG... SERIES MINI-CONTACTORS, ≤225VDC (DIODE)




Contact characteristics

Tightening torque for terminals			
	min	lbin	9
	max	lbin	9
Tightening torque for coil terminal			
	min	lbin	9
	max	lbin	9
Dimonsions			

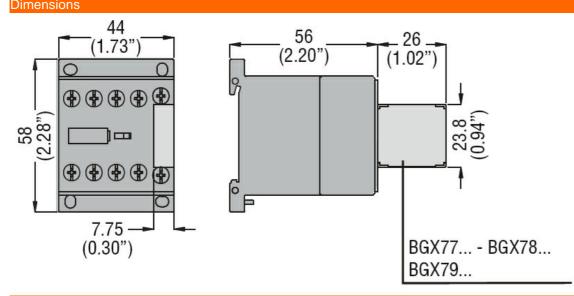

Wiring diagrams

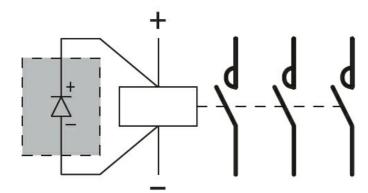

Certifications and compliance

Compliance	e	
	CSA C22.2 n° 60947-1	
	IEC/EN 60947-1	
	UL 60947-1	
Certificate	S	
	cULus	
	EAC	
ETIM class	sification	
11BGX78225	The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding	1 / 2



QUICK CONNECT SURGE SUPPRESSOR FOR BG... SERIES MINI-CONTACTORS, ≤225VDC (DIODE)

ETIM 8.0

EC002565 -Filter circuit coil for low-voltage