





## Contact characteristics . .

Tightening torque for terminals			
	min	lbin	9
	max	lbin	9
Tightening torque for coil terminal			
	min	lbin	9
	max	lbin	9
Dimonsions			

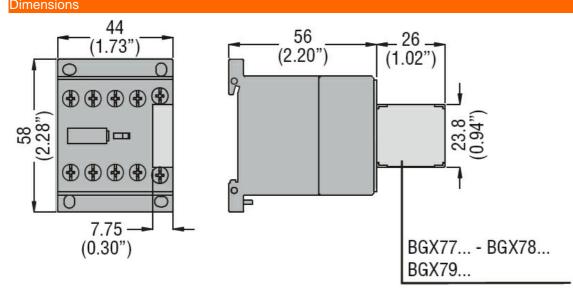

## Wiring diagrams

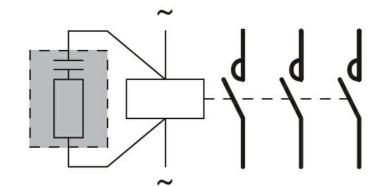

## Certifications and compliance

Compliand	e	
•	CSA C22.2 n° 60947-1	
	IEC/EN 60947-1	
	UL 60947-1	
Certificate	3	
	cULus	
	EAC	
ETIM class	sification	
11BGX79048	The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding	1 / 2

11BGX79048



QUICK CONNECT SURGE SUPPRESSOR FOR BG... SERIES MINI-CONTACTORS, ≤48VAC (RESISTOR-CAPACITOR)

ETIM 8.0

EC002565 -Filter circuit coil for low-voltage