



Product designation	Auxiliary contact	
Product type designation	11G482	

Contact characteristics

Number of poles	Nr.	1 C/O
Rated insulation voltage U_i IEC/EN	V	690
IEC Conventional free air thermal current I_{th}	A	0.1

Mechanical features

Operating position	normal allowable	On vertical plane Any
Fixing		Front lateral mounting
Weight	g	13

Auxiliary contact characteristics

Type of contact		1 C/O
Thermal current I_{th}	A	0,1


Electrical characteristics

Conductivity		5V 1mA
--------------	--	--------


Ambient conditions

Temperature	Operating temperature		
	min	°C	-40
	max	°C	+70
	Storage temperature		
	min	°C	-60
	max	°C	+80

Dimensions

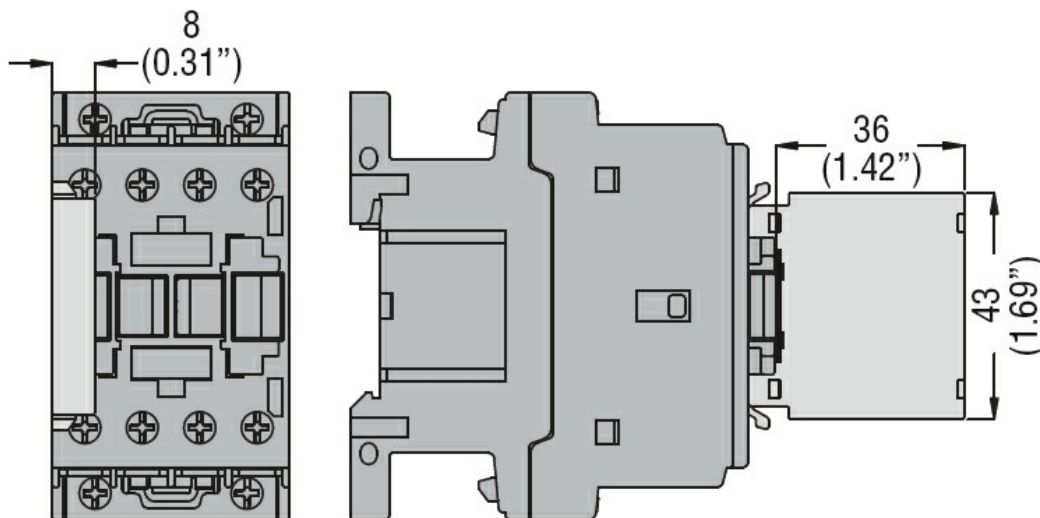

Wiring diagrams

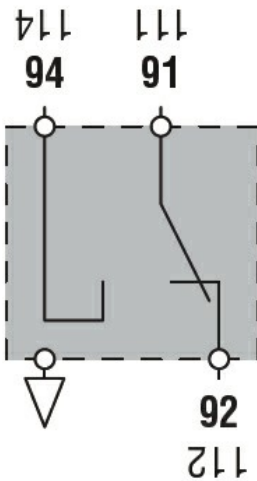

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1
CSA C22.2 n° 60947-5-1
IEC/EN 60947-1
IEC/EN 60947-5-1
UL 60947-1
UL 60947-5-1

Certificates

CCC
CSA
cURus
EAC

ETIM classification

ETIM 8.0

EC000041 -
Auxiliary contact
block