

DELAYED AUXILIARY CONTACT 1NO+1NC (PNEUMATIC OPERATION) ON ENERGISATION FOR FRONT CENTRE MOUNTING. SCREW TERMINALS, FOR BF... SERIES CONTACTORS,




Mechanical features

Front centre Fixing mounting


Auxiliary contact characteristics

1NO + 1NC Type of contact

Dimensions

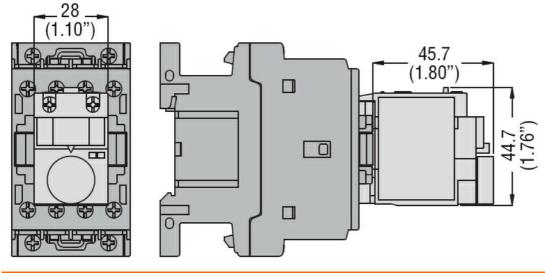

Wiring diagrams



Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-5-1

IEC/EN 60947-1

IEC/EN 60947-5-1

UL 60947-1

UL 60947-5-1

Certificates

CCC

functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding



11G4853

DELAYED AUXILIARY CONTACT 1NO+1NC (PNEUMATIC OPERATION) ON ENERGISATION FOR FRONT CENTRE MOUNTING. SCREW TERMINALS, FOR BF... SERIES CONTACTORS,

CSA	
cURus	
EAC	

ETIM classification

ETIM 8.0

EC002498 -Accessories/spare parts for lowvoltage switch technology