DELAYED AUXILIARY CONTACT 1NO+1NC (PNEUMATIC OPERATION) ON DE-ENERGISATION FOR FRONT CENTRE MOUNTING. SCREW TERMINALS, FOR BF... SERIES CONTACTORS, 30S




## Mechanical features

Fixing Front centre mounting


# Auxiliary contact characteristics

Type of contact 1NO + 1NC

# Dimensions

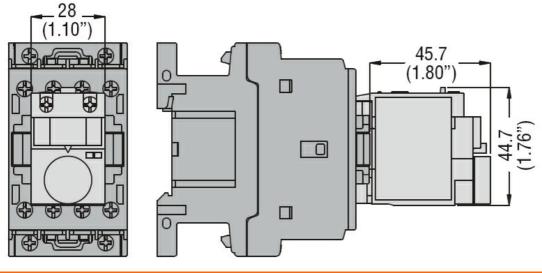

#### Wiring diagrams



# Certifications and compliance

# Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-5-1

IEC/EN 60947-1

IEC/EN 60947-5-1

UL 60947-1

UL 60947-5-1

# Certificates

CCC



## 11G48630

DELAYED AUXILIARY CONTACT 1NO+1NC (PNEUMATIC OPERATION) ON DE-ENERGISATION FOR FRONT CENTRE MOUNTING. SCREW TERMINALS, FOR BF... SERIES CONTACTORS, 30S

CSA	
cURus	
EAC	

ETIM classification

ETIM 8.0

EC002498 -Accessories/spare parts for lowvoltage switch technology