



Caracteristici mecanice

Fixare


Montaj
frontal/lateral

Date tehnice UL


Tensiune nominală de funcționare AC (UL)

V 600

Dimensiuni

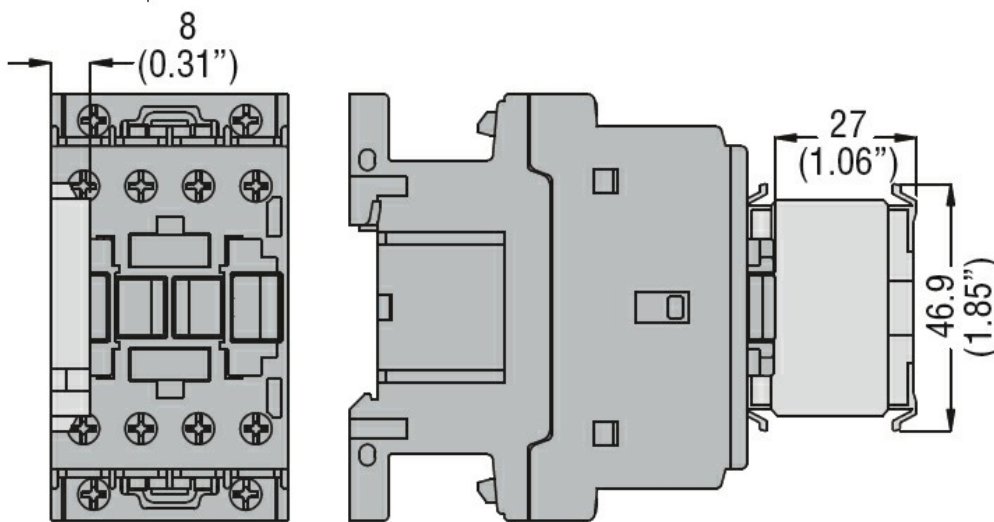

Diagrame de cablare

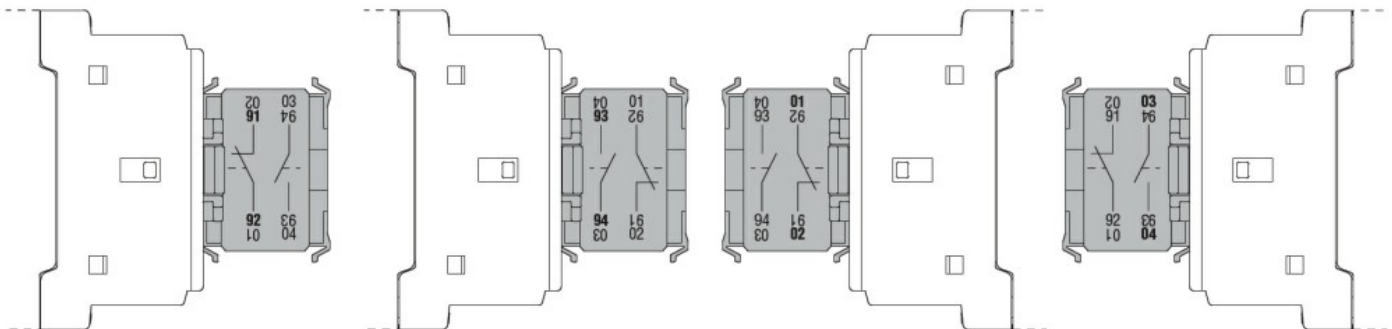

The termination of the G218 auxiliary contact has more than one numbering due to the fact that the block can assume various mounting positions. See the numbering in boldface for a correct interpretation.

Certificari si conformitate

Conformitate

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-5-1

IEC/EN 60947-1

IEC/EN 60947-5-1

UL 60947-1

UL 60947-5-1

Certificate

CCC

CSA

cURus

EAC

Clasificare ETIM

ETIM 8.0

EC000041 - Bloc
de contact
auxiliar