


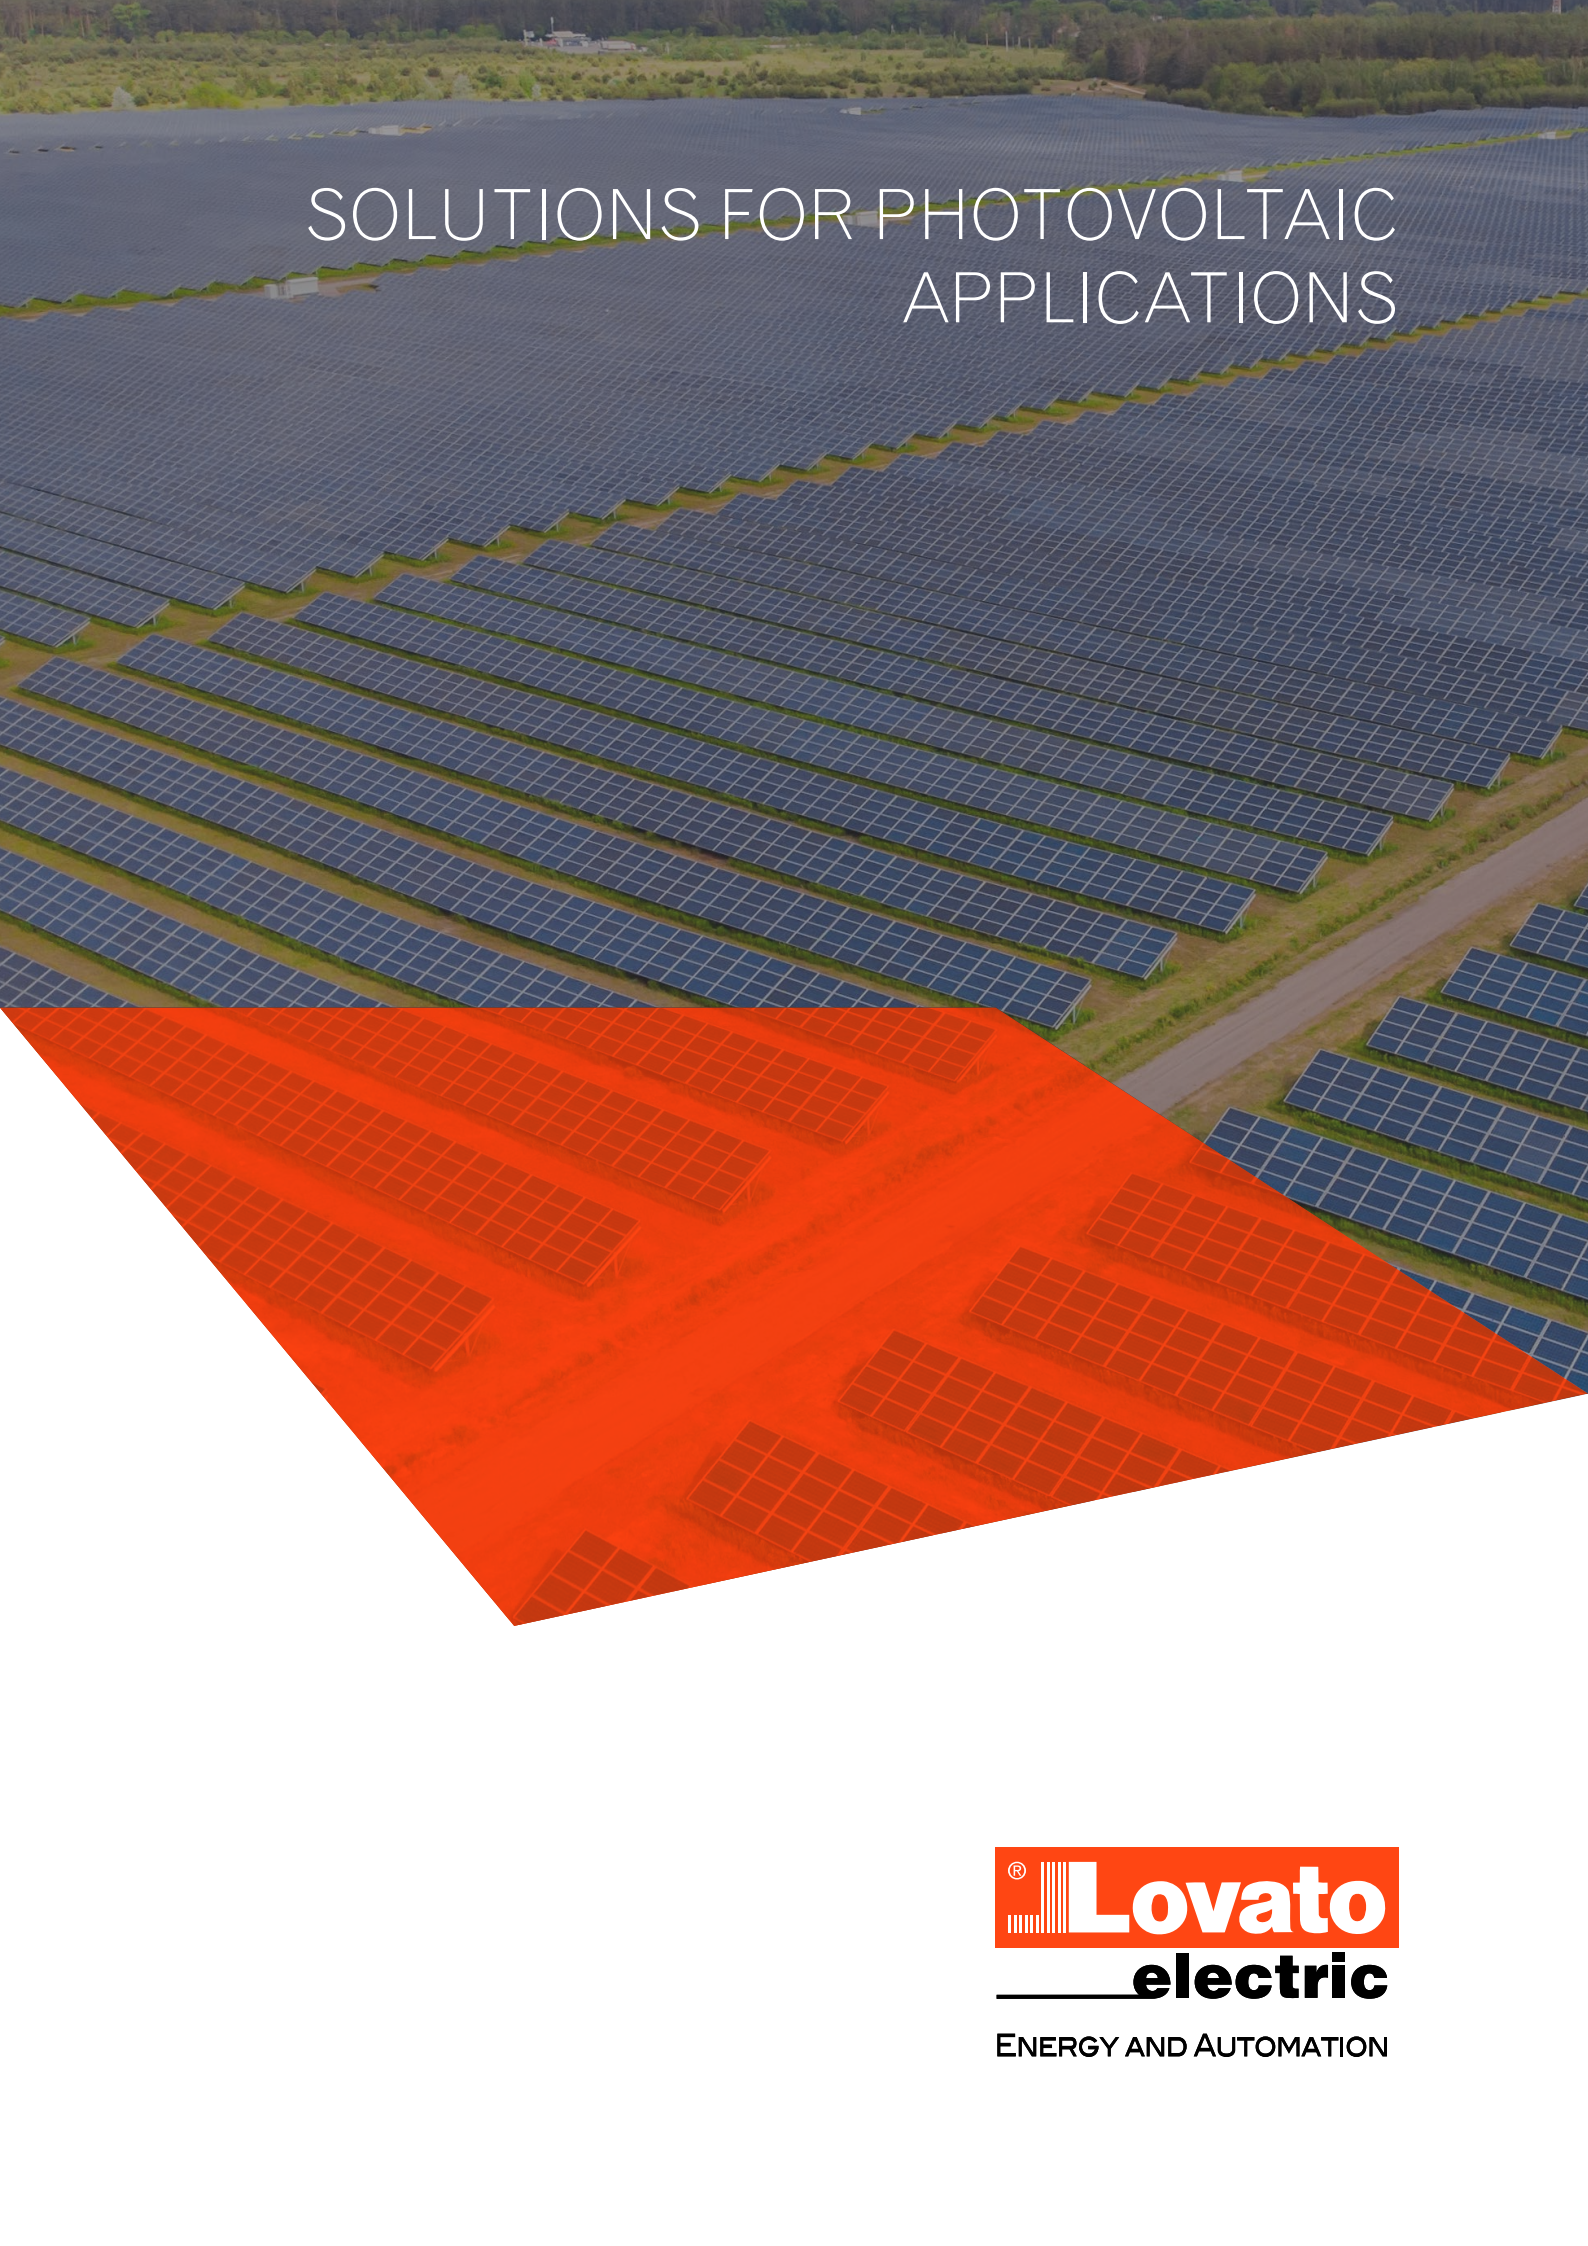

SOLUTIONS FOR PHOTOVOLTAIC APPLICATIONS

DC surge protection devices with plug-in cartridge type 1-2 - Dual input for two strings

Order code	Pole arrangement	Status indicator	DIN size n°
EN rated voltage Un 1100VDC.			
SG2PVT1K10M5	+, -, PE	NO	2

DC surge protection devices with plug-in cartridge type 2 - Dual input for two strings

Order code	Pole arrangement	Status indicator	DIN size n°
EN rated voltage Un 1100VDC.			
SG2PVT2K10M5	+, -, PE	NO	2

Switch disconnectors GD series


Order code	IEC conventional free air thermal current Ith	IEC rated operational current Ie DC21B				
			≤800V	1000V	1200V	1500V
	[A]	[A]	[A]	[A]	[A]	[A]
Switch disconnector complete with black handle.						
GD025AT2	25	25	16	—	—	—
GD025AT3	25	25	25	—	—	—
GD032AT3	32	32	32	—	—	—
GD032AT4	32	32	32	25	20	—
GD040AT3	40	40	32	—	—	—
GD040AT4	40	40	40	32	25	—

Fuse holders for system up to 1000VDC

Order code	Pole arrangement	Status indicator	n° of DIN modules
For 10x38mm fuses. IEC 32A rated current at 1000VDC.			
FBE01D1P	1P	—	1
FBE01D1PL	1P	YES	1
FBE01D2P	2P	—	2
FBE01D2PL	2P	YES	2

Fuse holders for system up to 1500VDC

Order code	Pole arrangement	Status indicator	n° of DIN modules
For 10x85mm and 14x85mm fuses. IEC 32A breaking capacity at 1500VDC.			
FB04D1P	1P	—	1
FB04D1P	1P	YES	1

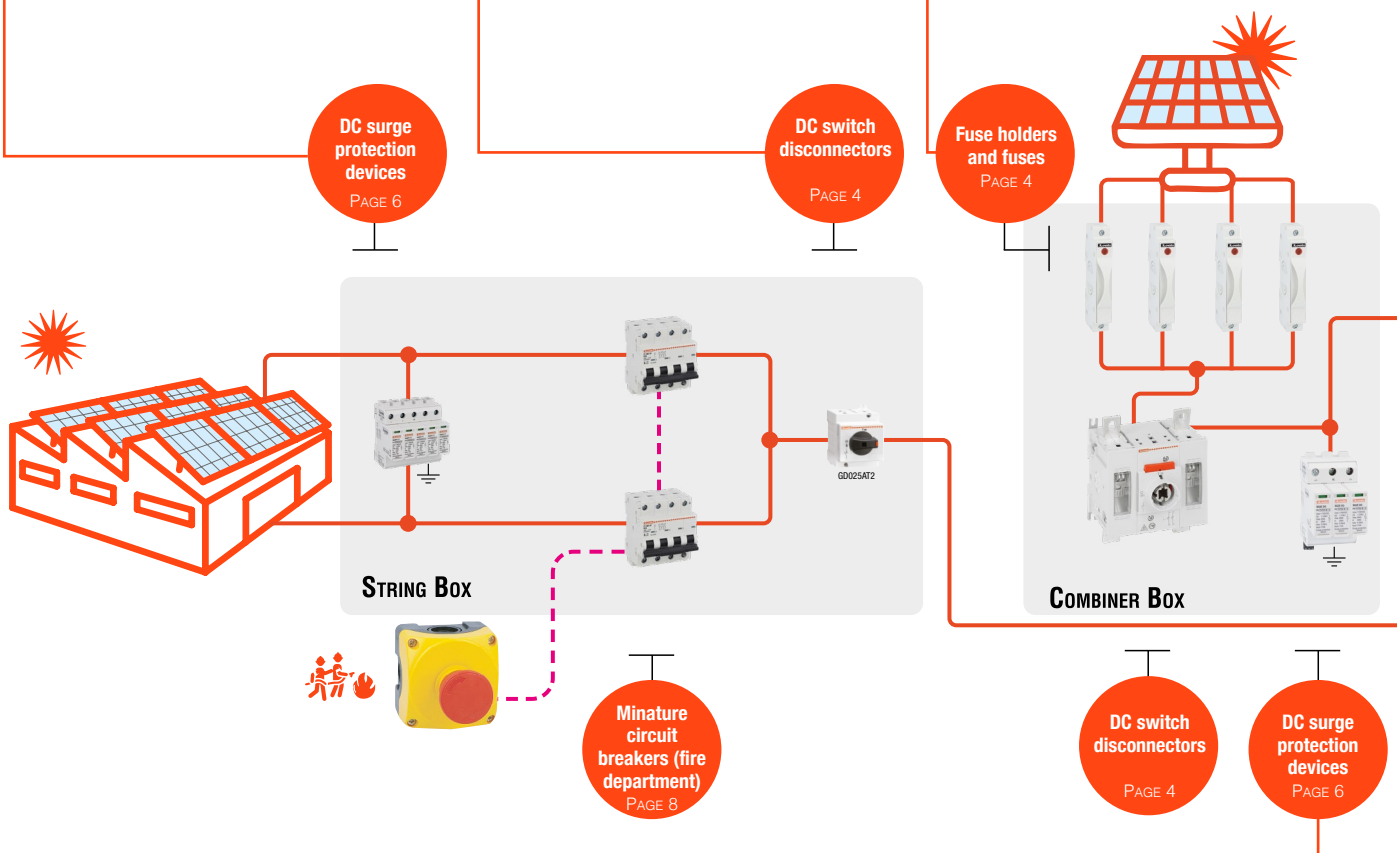

Miniature circuit breakers 1000VDC

Order code	Ie	Number of DIN module
	[A]	n°
Miniature circuit breakers in DC - B curve characteristics		
P1MD4PB16	16	4
P1MD4PB20	20	4
P1MD4PB25	25	4
P1MD4PB50	50	4

Switch disconnectors

Order code	IEC free air thermal current Ith	IEC rated operational current Ie DCPV1	800V	1000V	1500V
	[A]	[A]	[A]	[A]	[A]
Switch disconnector to be completed with handle.					
GLD0100T2C3	100	100	100	100	100
GLD0160T2C3	160	160	160	160	160
GLD0200T2C3	200	200	200	200	200
GLD0250T2C3	250	250	250	250	250
GLD0315T2C3	315	315	315	315	315
GLD0100T4C3	100	100	100	100	100
GLD0160T4C3	160	160	160	160	160
GLD0200T4C3	200	200	200	200	200
GLD0250T4C3	250	250	250	250	250
GLD0315T4C3	315	315	315	315	315

Surge protection devices type 1-2 - DC with plug-in cartridge

Order code	Pole arrangement	Relay output (SPDT)	Number of DIN module
EN rated voltage Un 1100VDC.			
SG2EDGK10M3R	+, -, PE	SI	3
EN rated voltage Un 1500VDC.			
SG2EDGK50M3R	+, -, PE	SI	3

type 2 - DC with plug-in cartridge

EN rated voltage Un 600VDC.			
SE2DG600M2	+, -, PE	NO	2
SE2DG600M2R	+, -, PE	YES	2
EN rated voltage Un 1000VDC.			
SE2DGK00M3	+, -, PE	NO	3
SE2DGK00M3R	+, -, PE	YES	3
EN rated voltage Un 1500VDC.			
SE2DGK50M3	+, -, PE	NO	3

Backup power supply for interface protection system units


Order code	Description
Backup power supply for interface protection system units PMVF...	
PMVFUPS02	Input 230VAC. Output 230VAC with stored energy 645Wh and power 50VA

Interface protection system units

Order code	Compliant with standards
PMVF52	CEI 0-21
PMVF61	DEWA DRRG and SEC (Saudi Electricity Company)
PMVF71	ENA G99
PMVF81	VDE-AR-N 4105, 4110, 4120 and VDE V 0126-1-1
PMVF90	For systems requiring 3 maximum voltage thresholds
PMVF3000	CEI 0-16

Remote control and monitoring GSM modem via SMS

Order code	Description
GSM modem (modular - 4U). IP69K outside aerial with 2.5m cable. RJ45-USB programming cable (included).	
EXCGSM01	100...240VAC, 1 digital input, 1 analogic input (0...10V, 0...20mA, NTC), 1 relay output, SMS send/receive for remote control and alarm signals

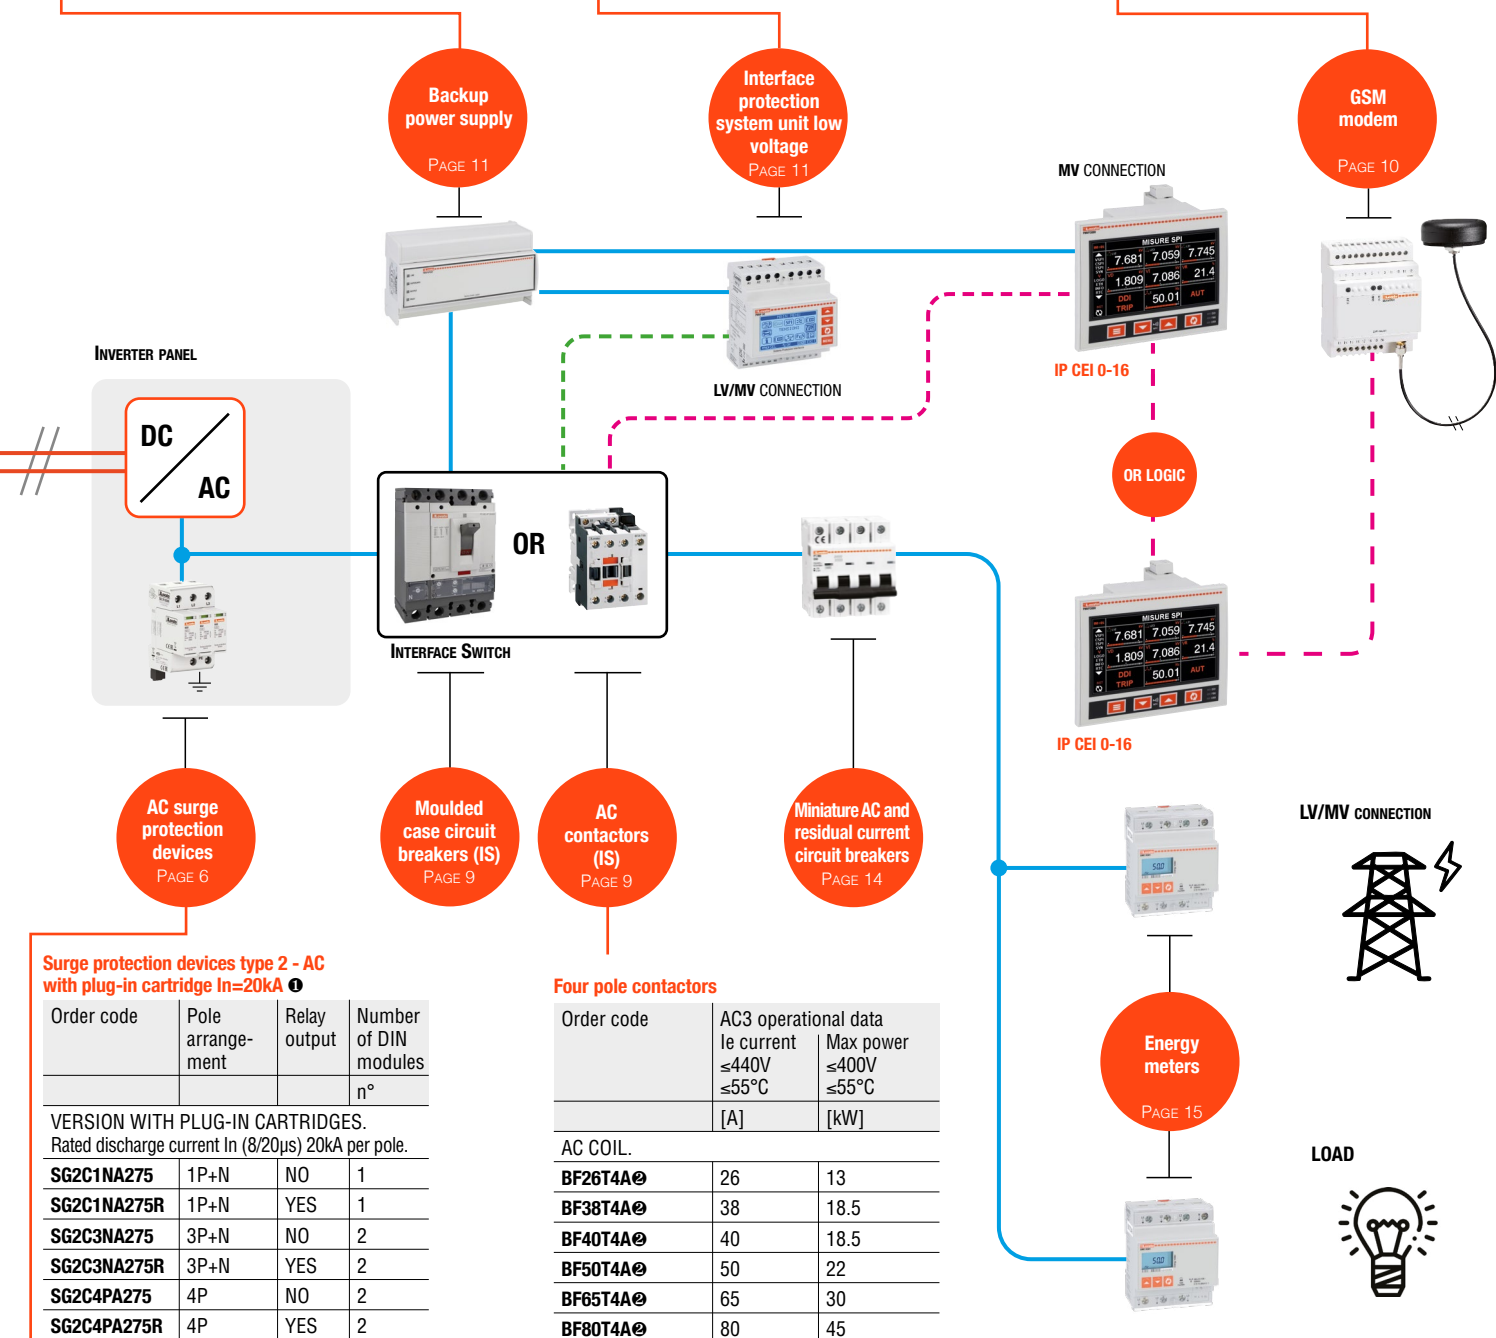

Surge protection devices type 2 - AC with plug-in cartridge In=20kA ①

Order code	Pole arrangement	Relay output	Number of DIN modules n°
VERSION WITH PLUG-IN CARTRIDGES. Rated discharge current In (8/20µs) 20kA per pole.			
SG2C1NA275	1P+N	NO	1
SG2C1NA275R	1P+N	YES	1
SG2C3NA275	3P+N	NO	2
SG2C3NA275R	3P+N	YES	2
SG2C4PA275	4P	NO	2
SG2C4PA275R	4P	YES	2

① See complete range at pag. 6

Four pole contactors

Order code	AC3 operational data le current ≤440V ≤55°C	Max power ≤400V ≤55°C
	[A]	[kW]
AC COIL.		
BF26T4A Ⓢ	26	13
BF38T4A Ⓢ	38	18.5
BF40T4A Ⓢ	40	18.5
BF50T4A Ⓢ	50	22
BF65T4A Ⓢ	65	30
BF80T4A Ⓢ	80	45
BF95T4A Ⓢ	95	55
BF115T4A Ⓢ	115	55
BF150T4A Ⓢ	150	75

AC/DC ELECTRONIC COIL.

Order code	AC3 operational data le current ≤440V ≤55°C	Max power ≤400V ≤55°C
	[A]	[kW]
BF160T4E Ⓢ	160	75
BF195T4E Ⓢ	195	90
BF230T4E Ⓢ	230	110

② The order code must be completed with the coil voltage as follows:
- AC 50-60Hz 024 - 048 - 110 - 230 - 400V
- AC 60Hz 024 60 - 048 60 - 120 60 - 220 60 - 230 60 - 460 60 - 575 60 (V).

③ The contactor coil is electronically controlled; it can be either AC or DC powered and has a wide operational range.
The order code must be completed with the coil voltage as follows:
- AC/DC 024 = 24...60VAC/20...60VDC; 110 = 60...130VAC/DC; 230 = 100...250VAC/DC; 400 = 250...500V.

Switch disconnectors GD series



GD...

Order code	IEC conventional free air thermal current Ith	IEC rated operational current Ie DCPV1				Qty per pkg	Wt
		≤800V	1000V	1200V	1500V		
	[A]	[A]	[A]	[A]	[A]	n°	[kg]

Switch disconnector complete with black handle.

GD025AT2	25	25	16	—	—	1	0.140
GD025AT3	25	25	25	—	—	1	0.180
GD032AT3	32	32	32	—	—	1	0.180
GD032AT4	32	32	32	25	20	1	0.220
GD040AT3	40	40	32	—	—	1	0.180
GD040AT4	40	40	40	32	25	1	0.220

General characteristics

- Up to 40A (1000VDC) and 32A (1200VDC)
- Modular construction
- Jumpers for connecting the poles in series supplied as standard
- Available versions:
 - Direct operating
 - Door coupling version. Use switch disconnector with direct actuator and separately purchase the handle and shaft extension for this version.
- Screw or 35mm DIN rail fixing
- Padlockable in 0 position with no extra accessory.

Operational characteristics

- Rated insulation voltage for: 1000V (pollution degree 3)
- Rated insulation voltage... Ui: 1500V (pollution degree 2)
- Rated impulse withstand Uimp: 8kV
- Mechanical life:
 - 10,000 cycles GD...
- Operating temperature: -25°C...+55°C
- Storage temperature: -40°C...+70°C.

Certifications and compliance

Compliant with standards: IEC/EN/BS 60947-3, IEC/EN/BS 60947-1.

Switch disconnectors IEC/EN/BS GLD series



GLD...T2C3

Order code	IEC conventional free air thermal current Ith	IEC rated operational current Ie DCPV1			Qty per pkg	Wt
		800V	1000V	1500V		
	[A]	[A]	[A]	[A]	n°	[kg]

Direct operating and door coupling versions.
Separately purchase the handle.

GLD0100T2C3	100	100	100	-	1	1.340
GLD0160T2C3	160	160	160	-	1	1.340
GLD0200T2C3	200	200	200	-	1	1.340
GLD0250T2C3	250	250	250	-	1	1.340
GLD0315T2C3	315	315	250	-	1	1.340
GLD0100T4C3	100	100	100	100	1	2.140
GLD0160T4C3	160	160	160	160	1	2.140
GLD0200T4C3	200	200	200	200	1	2.140
GLD0250T4C3	250	250	250	250	1	2.140
GLD0315T4C3	315	315	315	315	1	2.140

General characteristics

- Up to 315A 1500V DCPV1
- Up to 100A 1000V DCPV2 for GLD0315T2C3 and up to 125A 1500V DCPV2 for GLD0315T4C3
- Available versions:
 - Direct operating
 - Door coupling version. Use switch disconnector with direct actuator and separately purchase the handle and shaft extension for this version.
- Screw or 35mm DIN rail fixing
- Padlockable in 0 position with no extra accessory.

Operational characteristics

- IEC rated insulation voltage Ui: 1000V for GLD...T2...; 1500V for GLD...T4...
- Mechanical life: 20,000 cycles.

Certifications and compliance

Certifications obtained: UL Listed for GLD...UL.
Compliant with standards: IEC/EN/BS 60947-1, IEC/EN/BS IEC/EN/BS 60947-3, UL98B.

Switch disconnectors UL98B GLD series



GLD...T4C3UL

Order code	General purpose current		Qty per pkg	Wt
	1000V	1500V		
	[A]	[A]	n°	[kg]

Direct operating and door coupling versions.
Separately purchase the handle.

GLD0100T2C3UL	100	-	1	1.340
GLD0200T2C3UL	200	-	1	1.340
GLD0100T4C3UL	100	100	1	2.140
GLD0200T4C3UL	200	200	1	2.140

Direct operating handles



GLX61DB

Order code	Characteristics	Qty per pkg	Wt
		n°	[kg]

Direct operating lever handle. Padlockable.
Rotating type with screw fixing on switch disconnector.

GLX61DB	Black handle for GLD...	1	0.070
GLX61D	Red/Yellow handle for GLD...	1	0.095

Fuse holders for photovoltaic applications up to 1000VDC



FBE01D1P



FBE01D1PL



FBE01D2P



FBE01D2PL

Order code	Pole arrangement	Status indicator	DIN size	Qty per pkg	Wt
			n°	n°	[kg]

For 10x38mm fuses.
IEC 32A rated current at 1000VDC.

FBE01D1P	1P	—	1	12	0.064
FBE01D1PL	1P	YES	1	12	0.065
FBE01D2P	2P	—	2	6	0.127
FBE01D2PL	2P	YES	2	6	0.130

Operational characteristics

- IEC rated voltage U_n : 1000VDC
- IEC rated current I_n : 32A
- IEC utilisation category: DCPV0 1000VDC
- Suitable for IEC fuse class: gPV
- IEC degree of protection: IP20.

Reference standards

Compliant with standards: IEC/EN/BS 60269, IEC/EN/BS 60947-1, IEC/EN/BS 60947-3.

Fuses for photovoltaic applications up to 1000VDC



FE01D...

Order code	Rated current I_e	Qty per pkg	Wt
	[A]	n°	[kg]

10x38mm fuses.
IEC 25kA breaking capacity at 1000VDC.

FE01D02	2	10	0.008
FE01D04	4	10	0.008
FE01D06	6	10	0.008
FE01D08	8	10	0.008
FE01D10	10	10	0.008
FE01D12	12	10	0.008
FE01D16	16	10	0.008
FE01D20	20	10	0.008

Operational characteristics

- IEC rated voltage U_n : 1000VDC
- IEC rated current I_n : 2...20A
- IEC fuse class: gPV.

Reference standard

Compliant with standard: IEC/EN/BS 60269-6.

Fuse holders for photovoltaic applications up to 1500VDC



FB04D1P



FB04D1PL

Order code	Pole arrangement	Status indicator	Qty per pkg	Wt
			n°	[kg]

For 10x85mm and 14x85mm fuses.
IEC 32A rated current at 1500VDC.

FB04D1P	1P	No	6	0.109
FB04D1PL	1P	Yes	6	0.110

Operational characteristics

- IEC rated voltage U_n : 1500VDC
- IEC rated current I_n : 32A
- IEC utilisation category: DC20B 1500VDC
- Suitable for IEC fuse class: gPV
- IEC degree of protection: IP20.

Reference standard

Compliant with standard: IEC/EN/BS 60947-3.

Fuses for photovoltaic applications up to 1500VDC



FE05D...



FE04D...

Order code	Rated current I_e	Qty per pkg	Wt
	[A]	n°	[kg]

10x85mm fuses.
IEC 10kA breaking capacity at 1500VDC.

FE04D006	6	10	0.019
FE04D010	10	10	0.019
FE04D015	15	10	0.019
FE04D020	20	10	0.019

14x85mm fuses.
IEC 10kA breaking capacity at 1500VDC.

FE05D020	20	5	0.031
FE05D025	25	5	0.031
FE05D032	32	5	0.031


Operational characteristics

- IEC rated voltage U_n : 1500VDC
- IEC rated current
 - I_n : 6...20A for 10x85mm version
 - I_n : 20...32A for 14x85mm version
- Suitable for IEC fuse class: gPV.

Reference standard

Compliant with standard: IEC/EN/BS 60269-6.

Miniature circuit breakers 1000VDC



P1MD4PB...

Order code	I _e	Number of DIN module	Qty per pkg	Wt
	[A]	n°	n°	[kg]
Miniature circuit breakers for DC - B curve characteristics				
P1MD4PB16	16	4	3	0.505
P1MD4PB20	20	4	3	0.505
P1MD4PB25	25	4	3	0.505
P1MD4PB50	50	4	3	0.505

General characteristics

The miniature circuit breakers for photovoltaic applications type P1MD... are designed to protect against overloads and short circuits the cables located between the photovoltaic panel strings and the inverter.

In addition to photovoltaic applications, these devices can be used for other DC-1 loads, such as non-inductive or slightly-inductive loads.

Main features include:

- Rated current from 16A to 50A
- IEC breaking capacity I_{cu} 5kA 1000VDC
- Contact status with flag indicator
- Tripping characteristic: curve type B
- Accessories available: auxiliary contacts, shunt trips, undervoltage releases and motor operator.

Operational characteristics

- Rated insulation voltage U_i: 1000V
- Rated impulse voltage U_{imp}: 4kV
- Mechanical life: 20.000 cycles
- Mounting on 35mm DIN rail (IEC/EN/BS 60715)
- Mounting position: any
- Utilization category: A.

Reference standard

Compliant with standard: IEC/EN/BS 60947-2.

Add-on blocks for miniature circuit breakers



P1X1011



P1X16...



P1X19...

Order code	Description	Qty per MCB	Qty per pkg	Wt
		n°	n°	[kg]
Auxiliary contact.				
P1X1011	1 changeover contact	1	12	0.040
Indicator contact for thermal-magnetic trip.				
P1X1311	1 changeover contact	1	12	0.040
Undervoltage trip release.				
P1X14230	230VAC 50/60Hz	1	8	0.070
Shunt trip release.				
P1X16230	110...415VAC 50/60Hz	1	8	0.070
P1X16024	12...24VAC/DC 50/60Hz	1	8	0.070
Motor operator				
P1X192D024	Control voltage 24VDC	1	5	0.123
P1X192E230	Control voltage 230VAC / 220 VDC	1	5	0.123

General characteristics


- Auxiliary and indicator contact width: 9mm/0.35" (0.5 module)
- Undervoltage and shunt trip release width: 18mm/0.71" (1 module)
- Maximum combination: 4 add-on blocks on MCB left side only of which 1 motor operator, 1 undervoltage or shunt release and then 2 contacts of which 1 auxiliary contact and 1 indicator contact.
- Motor operator width: 27mm/1.06" (1.5 modules).

Operational characteristics

- IEC rated impulse voltage U_{imp}: 4kV
- IEC rated operational current in AC: 6A 230V; 3A 400V (auxiliary contacts)
- Motor operator consumption during operation: 33...48W
- Motor operator consumption in stand-by mode: 1W.

Reference standard

Compliant with standard: IEC/EN/BS 60947-5-1.

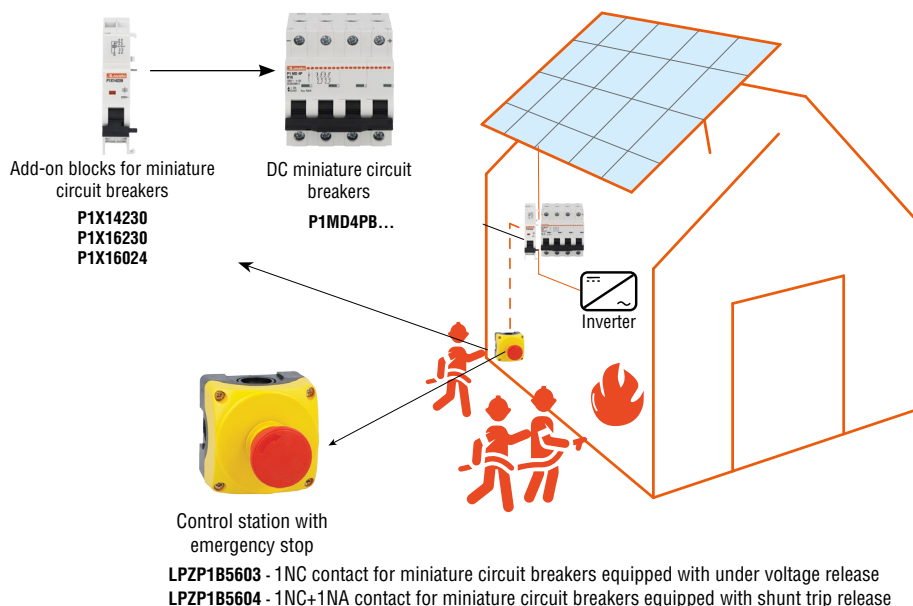

PV Cut-Off Switch

Also known as a fireman's switch, it may be required in photovoltaic systems for emergency shutdown of solar panels in case of fire or dangerous functional anomalies. The shutdown must be performed using a switch suitable for insulation which can be operated by a remote command located in a clearly marked and accessible position. The command should be provided via appropriate emergency buttons that can activate undervoltage coils or shunt trip release devices of the switch. Lovato Electric offers P1MD circuit breakers for this application, which cover nominal currents from 16A to 50A for systems up to 1000VDC.

Type 1,2 dual input for two strings, with plug-in cartridge $I_{imp}=5kA$



SG2PVT1K10M5

Order code	Pole arrangement	Relay output	DIN modules	Qty per pkg	Wt
			n°	n°	[kg]

Rated voltage U_n 1100VDC.

SG2PVT1K10M5	+, +, PE, -, -	NO	5	1	0,697
--------------	----------------	----	---	---	-------

General characteristics

The surge protection devices SG2PV... type with plug-in cartridge for photovoltaic applications are designed for DC systems.

They feature a dual input for connecting two independent strings, offering a more compact (5-module width), cost-effective, and faster-to-install solution compared to the traditional configuration with individual string protection.

Operating characteristics

- EN Maximum continuous voltage U_{cpv} : 1100VDC
- EN short-circuit current rating I_{scpv} : 11kA for SG2PVT1K10M5 and 9kA for SG2PVT2K10M5
- IEC degree of protection: IP20.

Characteristics

Code	EN Rated voltage U_n	EN Continuous voltage U_{cpv}	EN Protection level U_p
	[VDC]	[VDC]	[kV]
SG2PVT1K10M5	1100	1100	<3.8
SG2PVT2K10M5	1100	1100	<4.2

Certifications and compliance

Compliant with standards: EN/BS 50539-11.

Type 2 dual input for two strings, with plug-in cartridge $I_n=20\text{ kA}$




SG2PVT2K10M5

Order code	Pole arrangement	Relay output	DIN modules	Qty per pkg	Wt
			n°	n°	[kg]

Rated voltage U_n 1100VDC.

SG2PVT2K10M5	+, +, PE, -, -	NO	5	1	0,507
--------------	----------------	----	---	---	-------

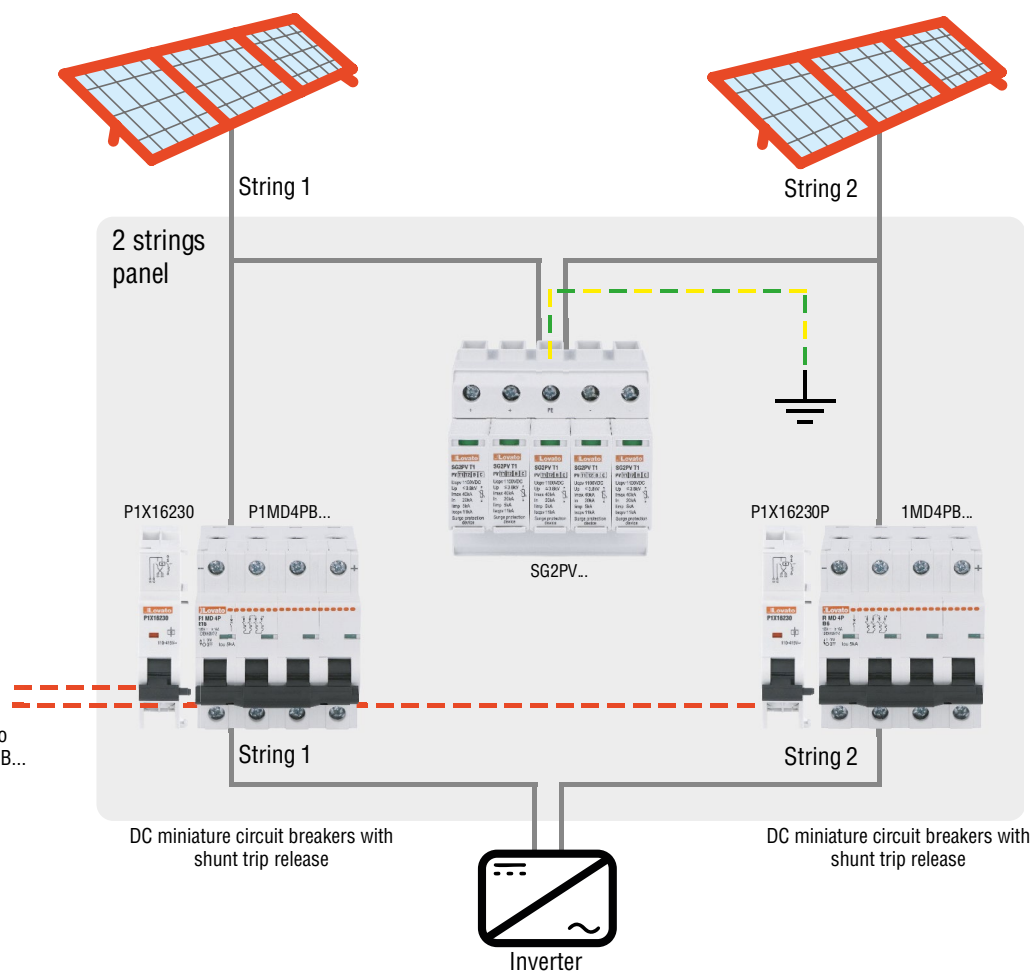

Mushroom head pushbutton turn to release for emergency stopping LPZ1B...

Type 1 and 2 - DC with plug-in cartridge



SG2EDGK10M3R

Type 2 - DC with plug-in cartridge



SE2DG600M2



SE2DGK...M3

Order code	Pole arrangement	Relay output	Number of DIN modules	Qty per pkg	Wt [kg]
			n°	n°	
EN rated voltage Un 1100VDC.					
SG2EDGK10M3R	+, -, PE	YES	3	1	0.406
EN rated voltage Un 1500VDC.					
SG2EDGK50M3R	+, -, PE	YES	3	1	0.406

Order code	Pole arrangement	Relay output	Number of DIN modules	Qty per pkg	Wt [kg]
			n°	n°	
EN rated voltage Un 600VDC.					
SE2DG600M2	+, -, PE	NO	2	1	0.320
SE2DG600M2R	+, -, PE	YES	2	1	0.325
EN rated voltage Un 1000VDC.					
SE2DGK00M3	+, -, PE	NO	3	1	0.396
SE2DGK00M3R	+, -, PE	YES	3	1	0.406
EN rated voltage Un 1500VDC.					
SE2DGK50M3	+, -, PE	NO	3	1	0.444

General characteristics

The surge protection devices type SG2EDG... and SE2DG... with plug-in cartridge for photovoltaic applications are suitable for installation on the direct-current side of a photovoltaic installation and protects against induced overvoltage conditions.

The protection cartridges are plug-in and can be easily replaced for quick servicing.

Operational characteristics

- EN maximum continuous voltage Ucpv: 600VDC, 1100VDC, 1500VDC
- EN short circuit current rating Iscpv: 11kA
- Versions with or without relay output with changeover contact for remote status indication
- EN degree of protection: IP20.

Characteristics

Type	EN rated voltage Un [VDC]	EN continuous voltage Ucpv [VDC]	EN voltage protection level Up [kV]
SG2EDGK10M3R	1100	1100	<3.8
SG2EDGK50M3R	1500	1500	<3.8
SE2DG600M2	600	670	<2.2
SE2DG600M2R	600	670	<2.2
SE2DGK00M3	1000	1060	<4.2
SE2DGK00M3R	1000	1060	<4.2
SE2DGK50M3	1000	1060	<4.2

Certifications and compliance

Certification obtained: EAC.

Compliant with standards: IEC/EN/BS 50539-11.

Type 1,2 and 3 Monoblock Iimp=12.5kA



SA0G...

SPARK GAP technology


Thanks to the integrated spark gap technology, SA0G... type surge protection devices are "no leakage current" and are therefore suitable for protecting sensitive electronic equipment in close proximity to the service entrance, such as smart metering applications.

This technology allows installation upstream of energy meters, as it does not influence the measurement of consumed energy.

Order code	Pole arrangement	Relay output	Number of DIN modules	Qty per pkg	Wt
			n°	n°	[kg]

MONOBLOCK VERSION.
IEC impulse current Iimp (10/35µs) 12.5kA per pole.

SA0G1NA255	1P+N	NO	2	1	0.246
SA0G3NA255	3P+N	NO	4	1	0.456
SA0G3PA255	3P	NO	4	1	0.416
SA0G4PA255	4P	NO	4	1	0.442

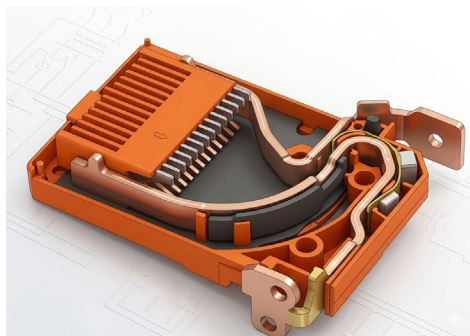

General characteristic

The monoblock surge protection devices type SA0G... combines the performance of SPD type 1,2,3 into a single product. It is ideal in all those systems of reduced extent to protect the load side downstream of main circuit breaker to terminal equipment. It protects against direct and indirect lightning strikes as well as induced overvoltage conditions. It can be installed inside main distribution boards and nearby terminal equipment.

Operational characteristics

- IEC maximum continuous operating voltage U_c : 255VAC
- IEC maximum discharge current I_{max} (8/20µs): 50kA per pole
- IEC rated discharge current I_n (8/20µs): 20kA per pole
- Backup fuse (gG) in case of fuse on power >250A:
 - without derating Iimp: 250A
 - with derating Iimp=10kA: 125A
- IEC degree of protection IP20.

Certifications and compliance

Certifications obtained: EAC.
Compliant with standards: IEC/EN/BS 61643-11.

Characteristics

Type	IEC rated voltage U_n	IEC voltage protection level U_p	Power installation system
	[V]	[kV]-LN	
SAG1NA...	240	1.5	TT, TN-S
SAG3NA...	240	1.5	TT, TN-S
SAG3PA...	240	1.5	TN-C
SAG4PA...	240	1.5	TN-S

Type 2 - AC Compact version with plug-in cartridge In=20kA



SG2C...

Order code	Pole arrangement	Relay output	Number of DIN modules	Qty per pkg	Wt
			n°	n°	[kg]

VERSION WITH PLUG-IN CARTRIDGES.
Rated discharge current I_n (8/20µs) 20kA per pole.

SG2C1NA275	1P+N	NO	1	1	0.234
SG2C1NA275R	1P+N	SI	1	1	0.240
SG2C3NA275	3P+N	NO	2	1	0.477
SG2C3NA275R	3P+N	SI	2	1	0.486
SG2C4PA275	4P	NO	2	1	0.496
SG2C4PA275R	4P	SI	2	1	0.505

General characteristics

SURGE PROTECTION DEVICES TYPE SG2... They are available in plug-in cartridge version and they are suitable for installation in secondary boards and in terminal equipment.

They ensure protection against overvoltages conditions. The protection cartridges are plug-in and can be easily replaced for quick servicing.

SG2... surge arresters are immune to temporary overvoltages (TOV) and block the circulation of the subsequent network current after the intervention.

Operational characteristics

- IEC maximum continuous operating voltage U_c : 275VAC for SG2C... and 300VAC for SG2...
- IEC maximum discharge current I_{max} (8/20µs): 40kA for SG2C... and 50kA for SG2...
- IEC rated discharge current I_n (8/20µs): 20kA per pole
- Versions with or without relay output with changeover contact for remote status indication
- IEC degree of protection: IP20.

Certifications and compliance

Certification obtained: EAC.
Compliant with standards: IEC/EN/BS 61643-11.

Characteristics

Type	IEC rated voltage U_n	IEC voltage protection level U_p	Power installation system
	[V]	[kV] L-N	
SG2C1NA275...	230	<1.5	TT, TN-S
SG2C3NA275...	230/400	<1.5	TN-S
SG2C4PA275...	230/400	<1.5	TT, TN-S

Type 2 - AC With plug-in cartridge In=20kA



SG2...

Order code	Pole arrangement	Relay output	Number of DIN modules	Qty per pkg	Wt
			n°	n°	[kg]

VERSION WITH PLUG-IN CARTRIDGES.
Rated discharge current I_n (8/20µs) 20kA per pole.

SG21NA300	1P+N	NO	2	1	0.234
SG21NA300R	1P+N	YES	2	1	0.240
SG22PA300	2P	NO	2	1	0.252
SG22PA300R	2P	YES	2	1	0.266
SG23NA300	3P+N	NO	4	1	0.477
SG23NA300R	3P+N	YES	4	1	0.486
SG24PA300	4P	NO	4	1	0.496
SG24PA300R	4P	YES	4	1	0.505

		SG2			SG2C	
Main Fuse (gG)		<=250	>250	>315	<100	>100
Prospective short-circuit current Ik		50kA		25kA	25kA	
Backup protection fuse (gG)	Amin	Not Needed	125A	125A	Not Needed	100A
	Amax		250A	315A		

Type	IEC rated voltage U_n	IEC voltage protection level U_p	Power installation system
	[V]	[kV] L-N	
SG21NA300...	230	<1.5	TT, TN-S
SG2PA300...	230	<1.5	TN-S
SG23NA300...	230/400	<1.5	TT, TN-S
SG24PA300...	230/400	<1.5	TN-S

Four-pole contactors for photovoltaic applications



BF09AT4A...BF18T4A

BF95T4A...BF150T4A



BF160T4E...BF230T4E

Auxiliary contacts for BF contactors



BFX1011

BFX1022



BFX1211



BFX10C10

BFX10C01



BFX12C11

Order code	AC3 Current I _e ≤440V ≤55°C	Max power ≤400V ≤55°C	Qty per Pkg	Wt
	[A]	[kW]	n°	[kg]
AC COIL.				
BF26T4A●	26	13	1	0.508
BF38T4A●	38	18.5	1	0.508
BF40T4A●	40	18.5	1	1.240
BF50T4A●	50	22	1	1.240
BF65T4A●	65	30	1	1.240
BF80T4A●	80	45	1	1.240
BF95T4A●	95	55	1	2.420
BF115T4A●	115	55	1	2.420
BF150T4A●	150	75	1	2.420
BF160T4E●	160	75	1	4.000
BF195T4E●	195	90	1	4.000
BF230T4E●	230	110	1	4.000
BF265T4E●	265	132	1	6.135
BF330T4E●	330	160	1	6.135
BF420T4E●	420	200	1	6.135
BF500T4E●	500	250	1	20.91
BF630T4E●	630	335	1	21.88

General characteristics

In photovoltaic systems, contactors are used with the function of IS (Interface Switch) between the DC/AC inverter output and the line.

The Italian CEI 0-21 standard, prescribes that contactors used as ISs must have dimensions corresponding to the AC-3 utilisation category.

Operational characteristics

Average consumption at ≤20°C

			BF26T4A BF38T4A	BF50T4A BF65T4A BF80T4A	BF95T4A BF115T4A BF150T4A
50/60Hz coil powered at	50Hz in-rush	VA	75	210	300
	holding	VA	9	15	20
	60Hz in-rush	VA	70	195	275
	holding	VA	6,5	13	17
Dissipation at 50Hz		W	2.5	5	6.5

Average consumption at ≤20°C

			BF160T4E BF195T4E BF230T4E	BF265T4E BF330T4E BF400T4E	BF420T4E BF500T4E BF630T4E
AC/DC coil	in-rush	VA/W	160...230	160...320	350...450
	holding	VA/W	1.5...3.0	3.5...8.0	3.3...4.3

Reference with standards

Compliant with standards: IEC/EN/BS 60947-1, IEC/EN/BS 60947-4-1, UL 60947-1, UL 60947-4-1, CSA C22.2 n° 60947-1, CSA C22.2 n° 60947-4-1.

- Complete order code with coil voltage as follows:
 - AC 50-60Hz 024 - 048 - 110 - 230 - 400V
 - AC 60Hz 024 60 - 048 60 - 120 60 - 220 60 - 230 60 - 460 60 - 575 60 (V).
- The contactor coil is controlled electronically; it can have either an AC or a DC supply and has a wide operating range.
 Complete the order code with the coil voltage as follows:
 - AC/DC 024 = 24...60VAC/20...60VDC●; 110 = 60...130VAC/DC;
 230 = 100...250VAC/DC; 400 = 250...500V.
- For the BF420, BF500, and BF630 contactors, operation is only in DC within the range 24...48V.

Four-pole moulded case circuit breakers IEC standard



P5ME4PS0100

Accessories



P5X1011



P5X14E...



P5X19...



P5X16E...



P5RA4P250A

Order code	Overload trip adjustment range	Short circuit trip adjustment range	Short circuit breaking capacity at 400V Icu Ics	Qty per pkg	Wt
	[A]	[A]	[kA] [kA]	n°	[kg]
Four-pole, IEC standard. Fourth pole on the left side.					
P5ME4PS0040	16...40	24...400	50 50	1	2.600
P5ME4PS0100	40...100	60...1000	50 50	1	2.600
P5ME4PS0160	64...160	96...1600	50 50	1	2.600
P5ME4PS0250	100...250	150...2500	50 50	1	2.600
P5ME4PS0400	160...400	240...4000	65 65	1	7.200
P5ME4PS0630	252...630	378...6300	65 65	1	7.200
P5ME4PS0800	320...800	480...8000	65 65	1	19.600

Order code	Description	Qty per pkg	Wt
		n°	[kg]
Add-on auxiliary contacts.			
P5X1011	One changeover contact. Screw terminals.	1	0.025
Undervoltage trip releases.			
P5X14E024	24VAC/DC	1	0.095
P5X14E230	220...240VAC - 250VDC	1	0.095
Shunt trip releases.			
P5X16E024	24VAC/DC	1	0.095
P5X16E230	220...240VAC - 250VDC	1	0.095
Motor operator for remote operation.			
P5X19D024	Motor operator 24VDC	1	0.850
P5X19E230	Motor operator 230VAC/220VDC	1	0.850
4P residual blocks, Type A, for IEC circuit breakers.			
P5RA4P250A	For P5ME4PS0400	1	0.990
P5RA4P630A	For P5ME4PS0400 and For P5ME4PS0630	1	3.900

General characteristics

MOULDED CASE CIRCUIT BREAKERS (MCCBs) are technologically advanced devices with electronic trip units, which can be used in photovoltaic systems with the function of IS (Interface Switch) between the DC/AC inverter output and the line, in alternative to contactors. MCCBs offer a wide current adjustment range, ensuring high precision in tripping and providing the flexibility to set a short tripping delay in the event of a short circuit.

The operating lever is equipped with a trip position, serving as an indicator for openings resulting from faults in the plant. A useful test button facilitates the verification of the plant's signalling system. Additionally, a LED on the MCCB's front signals a high current level that may cause the breaker to trip. A dedicated adjuster allows for the specific setting of tripping current on the 4th pole, which can differ from the three main poles.

Operational characteristic

- IEC rated insulation voltage U_i : 1000V
- IEC rated impulse withstand voltage: 8kV
- IEC rated frequency: 50/60Hz
- IEC breaking capacity: 50kA for sizes 40...250A, 65kA for sizes 400...800A
- Mounting position: Any
- IEC degree of protection: IP20 on front
- Operating temperature: -20°C...+70°C (with derating above 40°C)

Reference standard

Compliant with standard: IEC/EN/BS 60947-2.

- ① Complete the order code as follows:
- 1 for P5ME size 40A, 125A and 250A
 - 2 for P5ME size 400A and 630A
 - 3 for P5ME size 800A

Selection guide

The following table helps in choosing the interface protection system unit (IP) to use based on the country and the applicable regulations.

Country / Region	Norm / Standard	Product code
	CEI 0-16	PMVF3000
	CEI 0-21	PMVF52
	SEC (Saudi Electricity Company)	PMVF61
	SHAMS DUBAI DRRG (DEWA)	PMVF61
	KHARAMAA❶	PMVF61
	ENA (Energy Network Association) G99	PMVF71
	ENA (Energy Network Association) G99	PMVF71
	VDE-AR-N 4105, VDE-AR-N 4110, VDE-AR-N 4120, VDE V 0126-1-1	PMVF81
	VDE-AR-N 4105, VDE-AR-N 4110, VDE-AR-N 4120, VDE V 0126-1-1	PMVF81
	VDE-AR-N 4105 , VDE-AR-N 4110, VDE-AR-N 4120, VDE V 0126-1-1	PMVF81
	NA/EEA-NE7 – CH 2020	PMVF81
	NRS 097-2-1❶	PMVF81
	VDE-AR-N 4105 , VDE-AR-N 4110, VDE-AR-N 4120, VDE V 0126-1-1	PMVF81
	VDE-AR-N 4105 , VDE-AR-N 4110, VDE-AR-N 4120, VDE V 0126-1-1	PMVF81
	VDE-AR-N 4105 , VDE-AR-N 4110, VDE-AR-N 4120, VDE V 0126-1-1	PMVF81
	VDE V 0126-1-1	PMVF81
	VDE-AR-N 4105 , VDE-AR-N 4110, VDE-AR-N 4120, VDE V 0126-1-1	PMVF81
	VDE-AR-N 4105 , VDE-AR-N 4110, VDE-AR-N 4120, VDE V 0126-1-1	PMVF81
	VDE-AR-N 4105 , VDE-AR-N 4110, VDE-AR-N 4120, VDE V 0126-1-1	PMVF81
	IEC/EN/BS 60255-27; IEC/EN/BS 61010-1, IEC/EN/BS 61000-6-2, IEC/EN/BS 61000-6-4	PMVF90
	IEC/EN/BS 60255-27; IEC/EN/BS 61010-1, IEC/EN/BS 61000-6-2, IEC/EN/BS 61000-6-4	PMVF90

❶ Pending

Compliant with Italian standard CEI 0-21 for low voltage



PMVF52

Compliant with low, medium and high voltage



PMVF81
PMVF90

Compliant with standard ENA G99



PMVF71

Compliant with standards SHAMS DUBAI DRGG (DEWA) and SEC (Saudi Electricity Company)



PMVF61

Accessories for modular interface protection system units (IP)



EXM10...

Order code	Rated Voltage		Qty per pkg	Wt [kg]
	Control	Auxiliary		
	[V]	[V]	n.	[kg]

For low voltage system.
Dual threshold minimum and maximum voltage and frequency protection. Modular type.

PMVF52	Programmable	24...240VAC/DC	1	0.326
--------	--------------	----------------	---	-------

Order code	Rated Voltage		Qty per pkg	Wt [kg]
	Control	Auxiliary		
	[V]	[V]	n.	[kg]

For three-phase system with or without neutral.
Dual threshold minimum and maximum voltage and frequency protection, R.O.C.O.F. and Vector shift. Modular type.

PMVF81	Programmable	24...240VAC/DC	1	0.326
--------	--------------	----------------	---	-------

For systems requiring 3 maximum voltage thresholds.

PMVF90	Programmable	24...240VAC/DC	1	0.326
--------	--------------	----------------	---	-------

Order code	Rated Voltage		Qty per pkg	Wt [kg]
	Control	Auxiliary		
	[V]	[V]	n.	[kg]

Dual threshold minimum and maximum voltage and frequency protection, R.O.C.O.F. and Vector shift. Modular type.

PMVF71	Programmable	24...240VAC/DC	1	0.326
--------	--------------	----------------	---	-------

Order code	Rated Voltage		Qty per pkg	Wt [kg]
	Control	Auxiliary		
	[V]	[V]	n.	[kg]

Dual threshold minimum and maximum voltage and frequency protection, R.O.C.O.F. and Vector shift. Modular type.

PMVF61	Programmable	24...240VAC/DC	1	0.326
--------	--------------	----------------	---	-------

General Characteristics

Interface protection system (IP) units PMVF series have been developed in order to be used when a local generating system is connected in parallel with the utility distribution grid. The controls refer to limits of voltage and frequency monitoring. In the case when either the voltage or the frequency are out of admissible limits, the PI must step in by de energising a relay output so that the interface device (IS) trips.

PMVF are equipped with 5 inputs having the following functions:

- IS status feedback
- R.O.C.O.F or Vector shift delay
- Disabling signal
- Remote tripping (forced IS opening, independent of voltage and frequency values)
- Programmable input.

Also, there are 3 relay outputs for:

- IS opening and closing
- Backup device (contactor or breaker) opening
- Programmable output.

The command of backup device consists of a signal contemporary or delayed respect to the IS opening command, transmitted only if the IS failed and did not complete the disconnection.

Operational characteristics

- Auxiliary supply voltage: 24...240VAC/DC
- Voltage inputs range:
 - 100-480VAC for PMVF52
 - 100-50000VAC for PMVF81/90/71/61
- Relay outputs:
 - OUT1: 8A 250VAC, 8A 30VDC
 - OUT2: 5A 250VAC, 5A 30VDC
 - OUT3: 2A 250VAC, 2A 30VDC
- Password for parameters protection
- Programmable rated voltage, programmable voltage and frequency thresholds and delays
- Expandable with up to 2 expansion modules EXM series, at choice between digital I/Os or communication port (USB, RS232, RS485, Ethernet)
- Event log (128 events with time reference):
- Parameter configuration and remote control (only with communication expansion module) with software **Xpress** and **Synergy**
- Housing: modular, 4 modules
- Degree of protection: IP40 on front; IP20 on terminals.

Reference standards

Compliant with standards:
IEC/EN/BS 60255-27, IEC/EN/BS 61010-1, IEC/EN/BS 61000-6-2, IEC/EN/BS 61000-6-3.
PMVF52: CEI 0-21
PMVF81: VDE-AR-N 4105, VDE-AR-N 4110, VDE-AR-N 4120 and VDE V 0126-1-1
PMVF71: ENA G99
PMVF61: SHAMS DUBAI DRGG (DEWA) and SEC.

Order code	Description
Expansion modules. Communication ports.	
EXM1010	Opto-isolated USB interface
EXM1011	Opto-isolated RS232 interface
EXM1012	Opto-isolated RS485 interface
EXM1013	Opto-isolated Ethernet interface
Expansion modules. Inputs and outputs	
EXM1001	2 digital opto-isolated inputs and 2 relay outputs 5A 250VAC

Compliant with Italian standard CEI 0-16 For medium voltage



PMVF3000



EXP10...

Order code	Rated voltage		Qty per pkg	Wt
	Control	Auxiliary		
	[V]	[V]	n°	[kg]

Medium voltage system.
Dual threshold minimum and maximum voltage and frequency protection. Flush mount type.

PMVF3000	Measurements via VTs in MT or direct in LV	100...240VAC/ 110...250VDC	1	0,389
PMVF3KORL	License for enabling OR logic function on PMVF3000			

Order code	Description
------------	-------------

Relay outputs

EXP1003	2 relays outputs 5A 250VAC
----------------	----------------------------

Communication ports

EXP1010	Opto-isolated USB interface
EXP1011	Opto-isolated RS232 interface
EXP1012	Opto-isolated RS485 interface
EXP1013	Opto-isolated Ethernet interface

Additional expansion modules are available; for more information, refer to the PMVF3000 technical instruction.

Backup device opening

In installations with more than 400kW, the standard specifies there must be a command signal, that releases another backup device, given within 1 second whenever the IS opening fails or malfunctions.

Automatic IS reclosing

Whenever an automatic circuit breaker is used as the IS, the PMVF3000 is capable of controlling both the opening (according to the installation conditions indicated in the Italian CEI 0-16 standard) and the auto reclosing. The auto reclosing function includes defining the number of attempts and the time interval between an attempt and the following one as well as generating an alarm if the closing operation does not take place.

This function can be carried out through a programmable output of the PMVF3000 (unless it is already used for the standby device operation) or by installing an EXP1003 expansion module.

General characteristics

PMVF3000 interface protection system (IP) unit has been developed according to the Italian CEI 0-16 standard prescriptions. It is used when a local generating system is connected in parallel with the medium-voltage utility distribution grid. The controls refer to limits of voltage and frequency monitoring. In the case when either the voltage or the frequency are out of admissible limits, PMVF3000 must step in by de-energising a relay output so that the interface switch (IS) trips. PMVF3000 is equipped with I/Os having the following functions:

- 4 digital inputs:
 - IS status feedback
 - Interface protection system exclusion
 - Local control
 - Remote tripping (forced IS opening, independent of voltage and frequency values).
- 2 relays outputs:
 - IS opening
 - Programmable (either as factory default for standby devices opening or to set up as auto reclosing if the IS is an automatic circuit breaker)
- Built-in Ethernet port with web server
- OR logic function between multiple IP in communication, enabled by purchasing the PMVF3KORL license
- Integrated NFC connectivity for programming with Android and iOS smart devices and the LOVATO NFC app.

Operational characteristics

- Auxiliary supply voltage: 100-240VAC/110-250VDC
- Voltage inputs (connection via VTs in MV or directly in LV):
 - Primary: up to 150,000V
 - Secondary: 40...600V (for voltage/frequency); 0...85V (for residual voltage measurement)
- Relay outputs 5A 250VAC AC1 / 5A 30VDC
- 4 digital inputs
- 3 current inputs (for optional measuring): Use via CTs with selectable /5A or /1A secondary
- Widescreen color LCD display
- Expandable up to 2 EXP... series expansion modules
- Parameter configuration and remote control with software **Synergy** and **Xpress**
- Flush mount housing, cut-out 92x92mm
- Degree of protection: IP65 on front

Reference standards

Compliant with standards: Italian CEI 0-16; IEC/EN/BS 60255-27, IEC/EN/BS 60255-26.

Backup power supply for interface protection system units



PMVFUPS02

Order code	Description	Qty per pkg	Wt
Backup power supply for interface protection system units PMVF series.			
PMVFUPS02	Input 230VAC. Output 230VAC with stored energy 645Ws and power 50VA	1	0.500

Compatibility:

- Compatible with contactors (IS or backup function) with standard AC or electronic coil.
- Compatible with undervoltage trip releases (IS or backup function) of moulded case circuit breakers.
- Compatible with PMVF series interface protection system units.

Note. For use with PMVF3000, an isolation transformer with secondary 100...240VAC, 30VA must be interposed. For more information, contact our Technical Support at service@lovatoelectric.com.

General characteristics

The standards for photovoltaic application require an auxiliary power supply to feed the interface protection (IP), the interface switch (IS) and the backup switch for at least 5 seconds in the event of a power failure. PMVFUPS02 guarantees the necessary energy by accumulating it in capacitors, thus avoiding the use of batteries that require maintenance.

Operational characteristics

- Power supply: 230VAC, 50Hz
- Output voltage: 230VAC, 50Hz
- Output power: 50VA
- Accumulated energy: 645Ws
- Accumulation time: 60s
- 9U modular housing
- Operating temperature: -5...+ 50°C
- Degree of protection IP20.

Reference standards

Compliant with standards: IEC/EN/BS 61010-1.

Remote control and monitoring GSM modem via SMS

Compliant with Italian CEI 0-16 Standard, paragraph 8.8.6.5 and annex M, resolution 421/2014 of the ARERA



EXCGSM01

Order code	Description	Qty per pkg	Wt
		n°	[kg]
GSM Modem (modular - 4U). IP69K outdoor aerial with 2.5m cable. RJ45-USB programming cable (included).			
EXCGSM01	100...240VAC, 1 digital input, 1 analog input (0...10V, 0...20mA, NTC), 1 relay output, SMS send/receive for remote control and alarm signals	1	0.340

Use with CEI 0-16

The CEI 0-16 standard in paragraph 8.8.6.5 and in attachment M prescribes that the electricity production plants powered by wind or solar photovoltaic sources with power greater than or equal to 100kW, connected or to be connected to medium voltage grids, are equipped with GSM modem. Thanks to this modem it is possible to manage the disconnection of the generation through the messages sent by the energy distributor.

AERIAL

- Quad band 850/900/1800/1900MHz
- Degree of protection: outdoor IP69K
- 2.5m cable
- Fixing via M10 hole:
 - with adhesive seal
 - with threaded pin and nut.

General characteristics

With EXCGSM01 it is possible to remotely operate a relay output and obtain information on the system by sending programmable SMS. Using the configuration software (downloaded for free from www.LovatoElectric.com) the user can control the relay output and both the digital and analog inputs.

The logic is based on events (for example, the activation of the digital input or the arrival of an SMS with specific text), to which the user can decide specific actions (reply either by SMS or voice message, or by switching the relay output).

Operational characteristics

- Auxiliary supply voltage: 100...240VAC
- 1 digital output 3A 250VAC
- 1 self-supplied digital input
- 1 analog input 0...10V, 0...20mA, NTC
- Housing for 3V and 1.8V SIM card
- SIM PIN management
- Temperature sensor
- Update time, sunrise and sunset via GSM network
- Position update via GSM
- Certified according to FCC rules, part 15B
- Housing: modular (4 modules)
- Mounting on 35mm DIN rail
- Operating temperature: -20...+60°C
- Degree of protection: IP40 on front; IP20 on terminals.

Reference standards

Compliant with electrical safety standards: EN/BS 62368, EN/BS 62311.

Miniature circuit breakers 1...63A

2P, 4P - 10kA (IEC/EN/BS)



P1MB4P...

Residual blocks for miniature circuit breakers up to 63A



P1RA4P...

Miniature circuit breakers 80...125A

4P - 10kA



P2MB4P...

Residual current operated circuit breakers

1P+N - 10kA



P1RE1N...

Order code	Curve	IEC In	IEC Icn	Mod. DIN	Qty per pkg	Wt
		[A]	[kA]	n°	n°	[kg]
Miniature circuit breakers – 2P – C-curve characteristic.						
P1MB2PC16	C	16	10	2	6	0.230
P1MB2PC20	C	20	10	2	6	0.230
P1MB2PC25	C	25	10	2	6	0.230
P1MB2PC32	C	32	10	2	6	0.230
P1MB2PC40	C	40	10	2	6	0.230
Miniature circuit breakers – 4P – C-curve characteristic.						
P1MB4PC20	C	20	10	4	3	0.460
P1MB4PC25	C	25	10	4	3	0.460
P1MB4PC32	C	32	10	4	3	0.460
P1MB4PC40	C	40	10	4	3	0.460
P1MB4PC50	C	50	10	4	3	0.460
P1MB4PC63	C	63	10	4	3	0.460

Order code	Type	In	Icn	Mod. DIN	Qty per pkg	Wt
		[A]	[mA]	n°	n°	[kg]
Residual blocks – 4P – Type A.						
P1RA4P40A030	A	40	30	3.5	1	0.230
P1RA4P40A300	A	40	300	3.5	1	0.230
P1RA4P63A030	A	63	30	3.5	1	0.230
P1RA4P63A300	A	63	300	3.5	1	0.230

Order code	Curve	IEC In	IEC Icn	Mod. DIN	Qty per pkg	Wt
		[A]	[kA]	n°	n°	[kg]
Miniature circuit breakers – 4P – C-curve characteristic.						
P2MB4PC080	C	80	10	6	2	0.680
P2MB4PC100	C	100	10	6	2	0.680
P2MB4PC125	C	125	10	6	2	0.680

Order code	Curve	IEC In	IEC Icn	IEC IΔn	Mod. DIN	Qty per pkg	Wt
		[A]	[kA]	[mA]	n°	n°	[kg]
Single pole + neutral RCBO type AC.							
P1RE1NC06AC030	C	6	10	30	2	1	0.205
P1RE1NC06AC300	C	6	10	300	2	1	0.205
P1RE1NC10AC030	C	10	10	30	2	1	0.205
P1RE1NC10AC300	C	10	10	300	2	1	0.205
P1RE1NC16AC030	C	16	10	30	2	1	0.205
P1RE1NC16AC300	C	16	10	300	2	1	0.205
P1RE1NC20AC030	C	20	10	30	2	1	0.205
P1RE1NC20AC300	C	20	10	300	2	1	0.205
P1RE1NC25AC030	C	25	10	30	2	1	0.205
P1RE1NC25AC300	C	25	10	300	2	1	0.205
P1RE1NC32AC030	C	32	10	30	2	1	0.205
P1RE1NC32AC300	C	32	10	300	2	1	0.205
P1RE1NC40AC030	C	40	10	30	2	1	0.205
P1RE1NC40AC300	C	40	10	300	2	1	0.205

General characteristics

These devices are used to protect against short circuits and overloads of wiring installations and loads in panel boards, office buildings, stores and similar applications.

Their purpose is circuit protection, circuit isolation and load operation controls. They have characteristics of instantaneous trip defined as follows:

- C-curve: instantaneous trip 5...10 times In for inductive loads (mixed loads, resistive and inductive with low inrush current)

Main features include:

- IEC rated current In: 1...63A
- Pole width: 17.5mm / 0.69"
- Contact status with flag indicator
- Trip characteristic: curve type B, C and D
- Auxiliary contacts and trip releases mounted on left side
- Fixing on 35mm DIN rail (IEC/EN/BS 60715).

Operational characteristics

- Dissipation per pole: 3...13W
- IEC rated insulation voltage Ui: 440V
- IEC rated impulse voltage Uimp: 4kV
- IEC rated operational voltage Ue: 230/400VAC
- UL 1077 rated operational voltage: 480VAC
- Short circuit breaking capacity: IEC/EN/BS 10kA - UL 7.5kA 480V.

Certifications and compliance

Certifications obtained: cURus (E369585); EAC; TÜV-Rheinland. Compliant with standards: IEC/EN/BS 60898-1, IEC/EN/BS 60947-2, UL 1077, CSA C22.2 n°235.

General characteristics

- IEC rated current In: 80...125A
- Pole width: 27mm / 1.06"
- Contact status with flag indicator
- Trip characteristic: curve type C and D
- Fixing on 35mm DIN rail (IEC/EN/BS 60715).

Operational characteristics

- Dissipation per pole: 15...20W
- IEC rated insulation voltage Ui: 400V
- IEC rated impulse voltage Uimp: 4kV
- IEC rated operational voltage Ue: 230/400VAC (230VAC 1P version)
- Short circuit breaking capacity: IEC/EN/BS 10kA - UL 5kA 240V (1P) - 5kA 480V (2-3-4P).

Certifications and compliance

Certifications obtained: cURus (E369585); EAC; TÜV-Rheinland. Compliant with standards: IEC/EN/BS 60898-1, IEC/EN/BS 60947-2, UL 1077, CSA C22.2 n°235.

General characteristics

These RCCBs are intended for the protection of people against indirect contact (electric shock) and of installations against fire hazards due to a persistent earth/ground fault current. They also protect against short circuit and overcurrent.

From a practical point of view, they integrate both functions of MCB and of RCCB.

Its main features are:

- IEC rated current In: 6...40A
- Version: 1P+N
- Contact status with flag indicator
- Double control lever to distinguish the residual current tripping from short circuit or overcurrent tripping
- Trip characteristic: curve type C
- Fixing on 35mm DIN rail (IEC/EN/BS 60715).

Operational characteristics

- Dissipation per pole: 3...13W
- Rated insulation voltage Ui: 400V
- Rated impulse voltage Uimp: 4kV
- Operating frequency: 50/60Hz
- Rated operational voltage Ue: 230VAC
- Rated residual operating voltage IΔn: 30mA or 300mA
- IEC short-circuit breaking capacity Icn: 10kA

Certifications and compliance

Certifications obtained: TÜV Rheinland, EAC. Compliant with standards: IEC/EN/BS 61009-1, IEC/EN/BS 61009-2-1.

Single-phase direct connection energy meters



Type	DMED100T1	DMED110T1	DMED111	DMED112	DMED115T1	DMED120T1	DMED121	DMED122
Maximum current	40A	40A	40A	40A	40A	63A	63A	63A
Display								
Vertical, no backlight	●	●	●	●				
Horizontal, backlight					●	●	●	●
Measurements								
kWh	●	●	●	●	●	●	●	●
kW with average and max demand		●	●	●	●	●	●	●
kvarh, kvar, V, I, Hz, PF, total and partial hour counter		●	●	●		●	●	●
Interface								
Pulse output	●							
Programmable output (pulses/thresholds)		●			●	●		
Built-in Modbus-RTU (RS485)			●				●	
Built-in M-Bus				●				●
MID version -25...+55°C❶	●	●	●	●		●	●	●
MID version -25...+70°C❷			●					
Compatibility with Synergy and Xpress software			●				●	

Three-phase energy meters



Type	DMED300T2	DMED311	DMED302	DMED305T2	DMED330	DMED332	DMED310T2
Maximum current	80A	80A	80A	CT /5 o CT /1	CT /5 o CT /1	CT /5 o CT /1	CT /5
Connection type							
Direct	●	●	●				
Via CT				●	●	●	●
Interface							
Programmable output (pulses/thresholds)	●			●			●
Built-in Modbus-RTU (RS485)		●			●		
Built-in M-Bus			●			●	
Expandability							
Communication (RS485, Ethernet, USB)							●
Relay outputs for load disconnection							●
Data memory (Data logger)							●
MID version -25...+55°C❶❸	●		●	●	●	●	●
MID version -25...+70°C❷		●					
cULus version (ANSI C12.20)❹	●						
Compatibility with Synergy and Xpress software		●			●		●

- ❶ For MID versions up to +55°C, add "MID" at the end of the code.
❷ For MID versions up to +70°C, add "MID7" at the end of the code.
❸ For cULus versions add "UL" at the end of the code.
❹ UTF certified versions available on request.



SOLUTIONS FOR PHOTOVOLTAIC APPLICATIONS



ENERGY AND AUTOMATION

LOVATO ELECTRIC S.P. A.

via Don E. Mazza, 12
24020 Gorle (Bergamo), ITALY
tel +39 035 4282111

www.LovatoElectric.com



The products described in this publication are subject to be revised or improved at any moment. Catalogue descriptions and details such as technical and operational data, drawings, diagrams and instructions, etc., do not have any contractual value. In addition, products should be installed and used by qualified personnel and in compliance with the regulations in force for electrical systems in order to avoid damages and safety hazards.