DMED111MID

ENERGY METER, SINGLE-PHASE, MID CERTIFIED, NON EXPANDABLE, 40A DIRECT CONNECTION, RS485 INTERFACE, MULTI-MEASUREMENTS, 230VAC

Auxiliary supply Us			
Auxiliary operating voltage range AC	Max	VAC	264
Operational frequency	min	Hz	45
	max	Hz	66
Rated frequency		Hz	50
Power consumption	Max	VA	1
Power dissipation Max		W	0.4
Measuring voltage inputs			
Rated voltage (Ue)	phase-neutral	VAC	230
Operating voltage range	phase-neutral	VAC	184…264
Connection method			Direct
Current			
IEC maximum (Imax)		A	40
IEC minimum (Imin)		A	0.25
IEC rated (Iref-Ib)		A	5
IEC start (Ist)		mA	20
Transition (Itr)		A	0.5
Accuracy			
	Active energy		Class B (EN 50470-3)
	Reactive energy		Class 2 (IEC/EN 62053-23)
RS485 serial interface			
Baud rate		bps	Programmable 1200…38400
Insulations			
Rated insulation voltage Ui IEC/EN		V	250
Rated impulse withstand voltage Uimp		kV	6
Operating frequency withstand voltage		kV	4
Functions			
Type of communication port			RS485
Mechanical features			
Housing type			Polyamide
Terminals type			Fixed
Conductor cross section	min	mm²	1.5
	Max	mm²	10
	min	AWG	16
	Max	AWG	6

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

Tightening torque (Max)				
			Nm	1.5
			lbin	14
Fixing				Din rail
Weight			g	90
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-25
		max	°C	+55
	Storage temperature			
		min	°C	-25
		max	°C	+70
Relative humidity			%	<80
Max altitude			m	2000
Maximum Pollution degree				2
Overvoltage category				III
Protection degree				IP40 (Front)
Mechanical environment				Class M1
Magnetic environment				Class E2

Dimensions

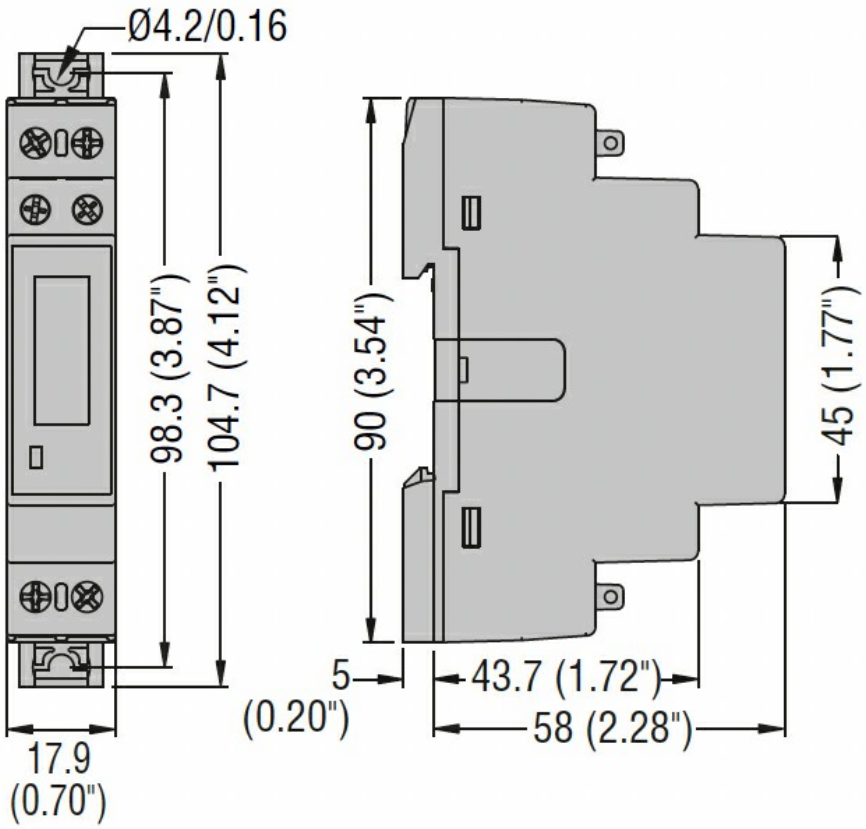

Wiring diagrams

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

DMED111MID

ENERGY METER, SINGLE-PHASE, MID CERTIFIED, NON EXPANDABLE, 40A DIRECT CONNECTION, RS485 INTERFACE, MULTI-MEASUREMENTS, 230VAC

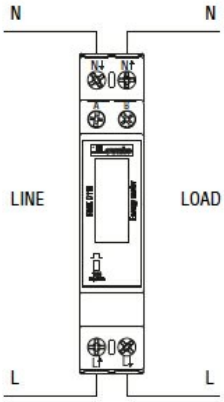

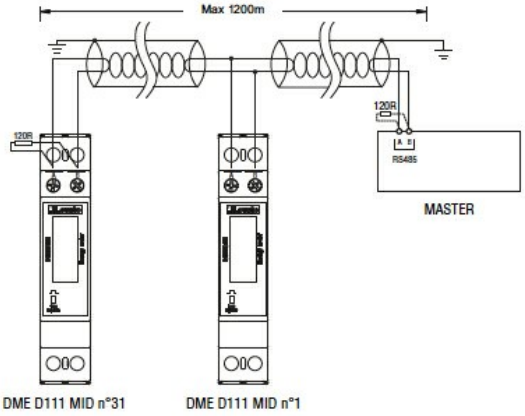

Certifications and compliance

Compliance

	EN50470-1
	EN50470-3
	TR 50579

Certificates

	MID (modulo B + D)
	RCM

ETIM classification

ETIM 8.0	EC001506 - Kilowatt-hour meter

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding