

## **DMGKIT200060** MODULAR LCD MULTIMETER KIT, NON EXPANDABLE, COMPOSED OF ONE DMG200 MULTIMETER AND N°3 CTS 60/5A FOR Ø22MM/0.87" CABLE

Product designation			Current
-			transformer kit DMG200 and 3
Product type designation			CTs 60/5A
Туре			Three-phase + neutral
DIN rail module number			4
Auxiliary supply Us			
Auxiliary rated supply voltage AC		VAC	100240
Auxiliary rated supply voltage DC		VDC	110250
Auxiliary operating voltage range			
AC			
	min	VAC	85
	Max	VAC	264
DC			
	min	VDC	93.5
	Max	VDC	300
Operational frequency			
	min	Hz	45
	max	Hz	66
Power consumption			
	Max	VA	3.5
Power dissipation Max		W	1.2
Measuring voltage inputs			
Rated voltage (Ue)			
	phase-phase	VAC	690
	phase-neutral	VAC	400
Operating voltage range			
	phase-phase	VAC	20830
	phase-neutral	VAC	10480
Voltage inputs operational frequency			
	min	Hz	45
	max	Hz	66
Voltage inputs measurement method			True RMS
			Single. two.
			three-phase with
Connection method			or without neutral.
			balanced three-
			phase systems
Current inputs			_
Rated current (le)		A	5
Measurement range			0.016
Measurement method			TRMS
			+20% le through
Overload capacity			external CT with
		٨	5A secondary
Overload peak		A	50A for 1s
Primary current lpn (/5)		A	60
Secondary output current		A	5
Overload withstand Ipn		%	120
Accuracy	1/1 KL 1/		
	VLN voltage		±0.5%
	VLL voltage		±0.5%
	Current		±0.5%




## **DMGKIT200060** MODULAR LCD MULTIMETER KIT, NON EXPANDABLE, COMPOSED OF ONE DMG200 MULTIMETER AND N°3 CTS 60/5A FOR Ø22MM/0.87" CABLE

	Frequency	±0.05%
	Active power	±1%
Insulations		
Rated insulation voltage Ui IEC/EN		V 690
Rated impulse withstand voltage Uimp	ŀ	٧ 9.5
Operating frequency withstand voltage	ŀ	۷ 5.2
IEC rated short-time thermal current Ith	lth	for s 4060
IEC rated dynamic current Idyn	lth	for s 2.5
Insulation dry type		Class E
Mechanical features		
Housing type		Polyamide
Terminals type		Fixed
Conductor cross section		
	min m	1m² 0.2
	Max m	1m² 4
	min AV	WG 24
	Max AV	WG 12
Tightening torque (Max)		
	Ν	lm 0.8
	lt	pin 7
Fixing		Din rail
Weight		g 1026
Ambient conditions		
Temperature		
Operating temperature		
		°C -20
	max °	°C +60
Storage temperature		
		°C -30
		°C +80
Relative humidity		% <90
Maximum Pollution degree		2
Protection degree		IP30
Dimensions		

**DMGKIT200060** 



MODULAR LCD MULTIMETER KIT, NON EXPANDABLE, COMPOSED OF ONE DMG200 MULTIMETER AND N°3 CTS 60/5A FOR Ø22MM/0.87" CABLE

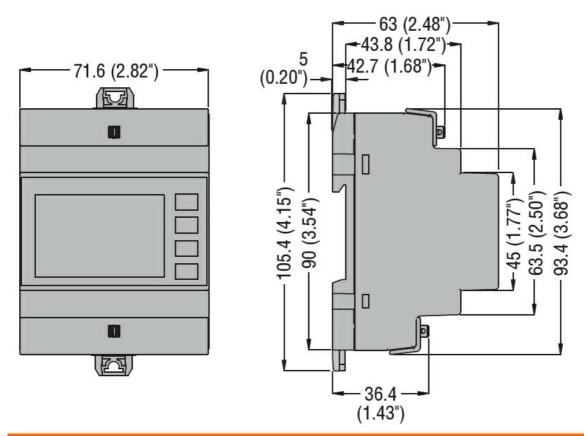

ETIM classification

**ETIM 8.0** 

EC002301 -Multifunction measuring instrument