





Product designation			Bus module for EASY BRANCH	
Product type designation			EXM0000	
Auxiliary supply Us				
Auxiliary rated supply voltage AC			VAC	100...240
Auxiliary rated supply voltage DC			VDC	110...250
Auxiliary operating voltage range AC			min	VAC 90
			Max	VAC 264
Power consumption			Max	VA 17
Power dissipation Max			W	8
Mechanical features				
Housing type			Polyamide RAL 7035	
Terminals type			Screw	
Conductor cross section			min	mm² 0.2
			Max	mm² 2.5
			min	AWG 24
			Max	AWG 12
Tightening torque (Max)			Nm	0.5
			lbin	4.5
Fixing			Din rail	
Weight			g	98
Ambient conditions				
Temperature				
Operating temperature			min	°C -20
			max	°C +60
Storage temperature			min	°C -30
			max	°C +80
Relative humidity			%	<80
Max altitude			m	2000
Maximum Pollution degree			2	
Overvoltage category			3	
Protection degree			IP20	
Dimensions				

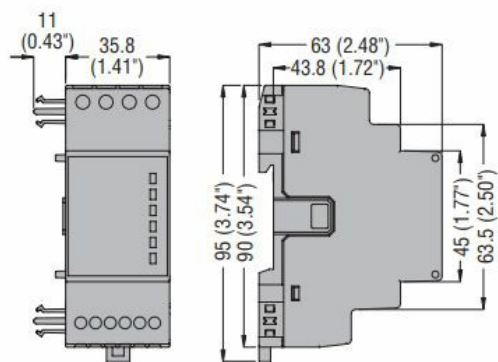

## Wiring diagrams

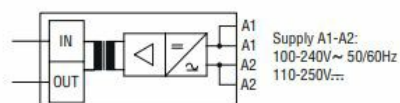

## Certifications and compliance

### Compliance

IEC/EN/BS 61000-6-2

IEC/EN/BS 61000-6-4

IEC/EN/BS 61010-1