



Current measuring module  
EXS4001  
2 current inputs  
4

Product designation

Product type designation

Type

DIN rail module number

**Current inputs**

Rated current (Ie)	A	1A/5A
--------------------	---	-------

Measurement range	0.004...6	
-------------------	-----------	--

Current inputs operational frequency	min	Hz	45
	max	Hz	66

Type	Internal CT	
------	-------------	--

Measurement method	TRMS	
--------------------	------	--

Overload capacity	1.2	
-------------------	-----	--

Overload peak	A	120A for 0.5s
---------------	---	---------------

**Current**

IEC maximum (Imax)	A	6
--------------------	---	---

IEC minimum (Imin)	A	0.004
--------------------	---	-------

**Accuracy**

	Current	Class 0.5 (IEC/EN 61557-12)
	Active power	Class 1 (IEC/EN 61557-12)
	Reactive power	Class 2 (IEC/EN 61557-12)
	THD	Class 5 (IEC/EN 61557-12)
	2nd 15th order harmonics	Class 5 (IEC/EN 61557-12)

**Insulations**

Rated insulation voltage Ui IEC/EN	V	600
------------------------------------	---	-----

Rated impulse withstand voltage Uimp	kV	9.6
--------------------------------------	----	-----

Operating frequency withstand voltage	kV	5.4
---------------------------------------	----	-----

**Mechanical features**

Housing type	Polyamide	
--------------	-----------	--


Terminals type	Screw	
----------------	-------	--

Conductor cross section	min	mm <sup>2</sup>	0.2
	Max	mm <sup>2</sup>	2.5
	min	AWG	24
	Max	AWG	12

Tightening torque (Max)	Nm	0.5
	lbin	4.5

Fixing			Din rail
Weight		g	210
<b>Ambient conditions</b>			
Temperature			
Operating temperature			
	min	°C	-20
	max	°C	+60
Storage temperature			
	min	°C	-30
	max	°C	+80
Relative humidity		%	<80
Max altitude		m	2000
Maximum Pollution degree			2
Overvoltage category			3
Protection degree			IP20

**Dimensions**

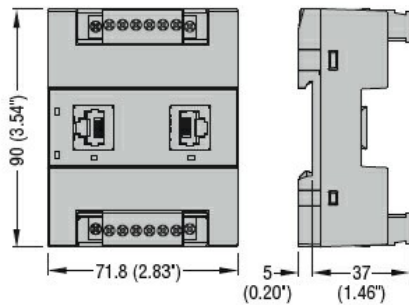

**Certifications and compliance**

Compliance

- IEC/EN/BS 61000-6-2
- IEC/EN/BS 61000-6-4
- IEC/EN/BS 61010-1

Certificates

- CE
- cETLus
- EAC
- UKCA