



Roller lever  
plunger  
KNE

Product designation

Product type designation

**General characteristics**

Material

Housing	Aluminium-zinc alloy
Roller	Plastic

**Contact characteristics**

Type of contact	2NC Slow action	
Thermal current I <sub>th</sub>	A	10
IEC/EN 60947-5-1 designation	A300 Q300	
Rated insulation voltage U <sub>i</sub>	V	440
Rated impulse withstand voltage U <sub>imp</sub>	kV	4
Short-circuit protection with fuse	Class/A	10 gG/SC QUICK FUSE
Switching speed	min	m/s 0.5
	max	m/s 1.5
IEC Conventional free air thermal current I <sub>th</sub>	A	10
Resistance per pole (average value)	mΩ	<10

**Mechanical features**

Operating head fixing	Locking bayonet insert	
Operating torque	Ncm	3
	ozin	4.25
Tightening torque (Max)	Switch fixing	
	Nm	2.5
	lbin	22.1
	Contact terminals	
	Nm	0.8
	lbin	7
Body lid screw fixing		
	Nm	0.8
	lbin	7
Conductor section	AWG/Kcmil	
	min	16
	max	14
	IEC	
	min	mm <sup>2</sup> 1 or 2
	max	mm <sup>2</sup> 2.5
Cable connection	Self-releasing screw terminal	

Cable entry M20 on the sides

**Operations**

Mechanical life	cycles	<10000000
Mechanical operation	cycles/h	3600

**Ambient conditions**

Temperature

Operating temperature

min	°C	-25
max	°C	+70

Storage temperature

min	°C	-40
max	°C	+70

**Resistance & Protection**


IP degree

Terminals	IP20
Body housing	IP65

Pollution degree

3

**Dimensions**

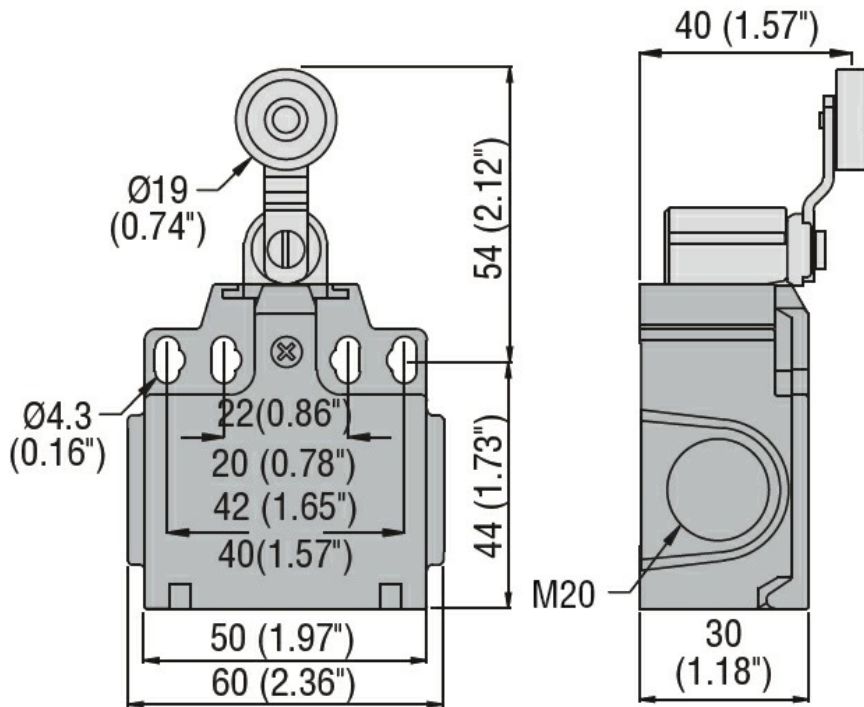

**Wiring diagrams**

## Slow action



### Certifications and compliance

#### Compliance

CSA C22.2 n° 14  
EN 50047  
IEC/EN 60204-1  
IEC/EN 60947-1  
IEC/EN 60947-5-1  
UL508

#### Certificates

CCC  
cULus  
EAC

### ETIM classification

ETIM 8.0

EC000030 - End  
switch