




Product designation	Miniature circuit breaker (MCB)			
Product type designation	P1 MB			
Number of poles	4P			
Number of DIN modules	4			
Compliance	IEC / UL1077			
Electrical features				
Rated insulation voltage U_i IEC/EN	V	440		
Rated impulse withstand voltage U_{imp}	kV	4		
Rated operational voltage AC (IEC)	VAC	230/400		
Rated frequency	Hz	50/60		
Rated current (I_n)	A	16		
Tripping curve		D		
Short circuit rating (IEC)	kA	10		
Electrical life	cycles	10000		
Power dissipation per pole max	W	1.69		
Ambient conditions				
Operating temperature	min	°C	-40	
	max	°C	+70	
Storage temperature	min	°C	-40	
	max	°C	+80	
Max altitude		m	2000	
Mechanical features				
Operating position	normal		Vertical plan	
			35mm DIN rail	
Fixing				
Tightening torque for terminals	min	Nm	1.8	
	max	Nm	2	
	min	Ibin	16	
	max	Ibin	17.7	
Terminals tool	Pz 2			
Conductor section	IEC	min	mm ²	1
		max	mm ²	35
	AWG/Kcmil	min		14
		max		6
	Mechanical life		cycles	20000
	Weight		g	460
Frontal IP degree	IP20			
Pollution degree	2			

Grid distance as per Annex H.1 of IEC/EN60898-1 standard

mm 60

Dimensions

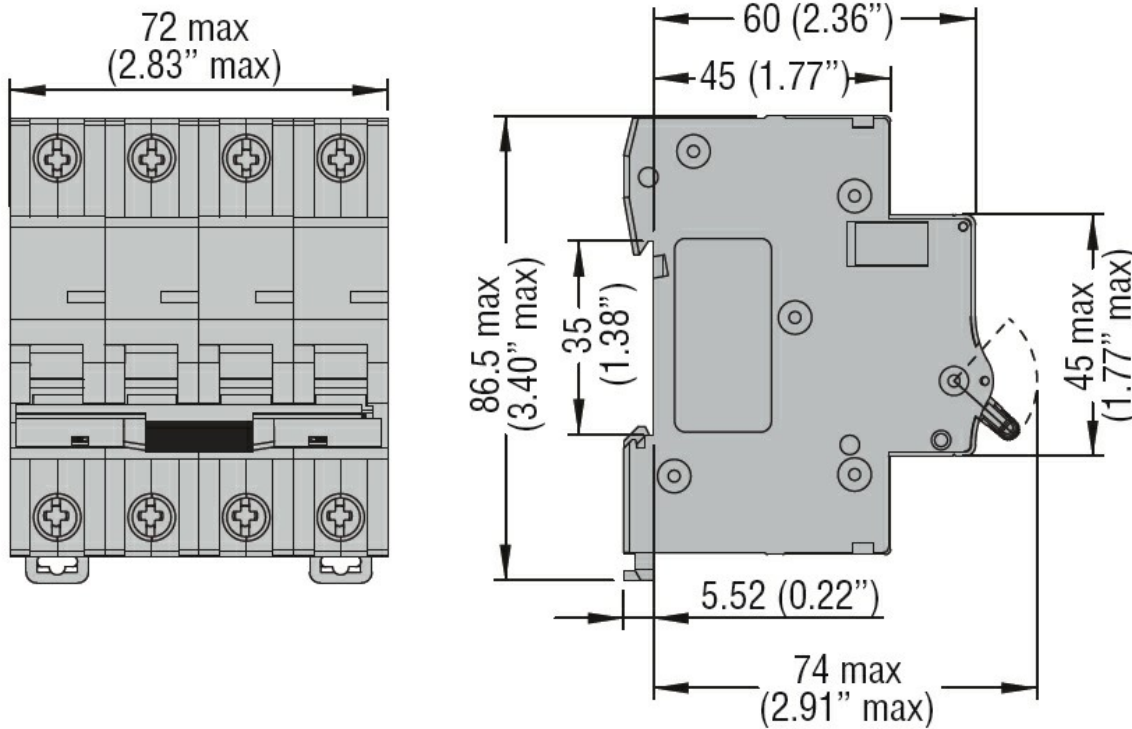

Wiring diagrams



Certifications and compliance

Compliance

CSA C22.2 n°235. UR "UL Recognized" per Canada e USA.

IEC/EN 60898-1

IEC/EN 60947-2

UL 1077

Certifications

cURus

EAC

TÜV-Rheinland

ETIM classification

ETIM 8.0

EC000042 -
Miniature circuit
breaker (MCB)