





Product designation				11RF9
Product type designation				Motor protection relay
<b>General characteristics</b>				
Number of poles	Nr.			3
Overvoltage category				III
Pollution degree				3
Frontal IP degree				IP20
Type of release				Thermal
Protection fuse				
	gG (IEC)	A	1	
	aM (IEC)	A	0.5	
	RK5 (UL)	A	1	
Phase failure detection				yes
Reset mode				Manual
<b>Power circuit characteristics</b>				
Rated insulation voltage $U_i$ IEC/EN	V			690
Rated impulse withstand voltage $U_{imp}$	kV			8
Rated operational voltage	V			690
Operational frequency		min	Hz	0
		max	Hz	400
Operational current $I_e$				
	Operational current min	A	0.2	
	Operational current max	A	0.33	
Tripping class				10A
Test Button				Yes
Trip indicator				yes
Terminals				
	type			screw and washer
	screw			M4
	width	mm	9.8	
	tool			Phillips 2
Tightening torque for terminals				
	min	Nm	2.3	
	max	Nm	2.3	
	min	lbin	1.7	
	max	lbin	1.7	
Conductor section				
	AWG/kcmil max			10
<b>Auxiliary circuit characteristics</b>				
Auxiliary contacts				
	NO	Nr.	1	
	NC	Nr.	1	

Auxiliary Rated insulation voltage $U_i$ IEC/EN	V	690
Auxiliary Rated impulse withstand voltage $U_{imp}$	kV	6
Auxiliary Rated operational voltage	V	690
Operating current AC15		
	24V	A 3
	120V	A 3
	240V	A 1.5
	380V	A 0.95
	480V	A 0.75
	500V	A 0.72
	600V	A 0.6
Operating current DC13		
	125V	A 0.11
	600V	A 0.22
IEC Conventional free air thermal current $I_{th}$	A	10
Terminals		
	Auxiliary circuit type	screw and washer
	Auxiliary circuit screw	M3,5
	Auxiliary circuit width	mm 8
	Auxiliary circuit tool	Phillips 1
Conductor section		
	Auxiliary circuit Flexible w/o lug max	mm <sup>2</sup> 2.5
	Auxiliary circuit Flexible c/w lug max	mm <sup>2</sup> 2.5
Tightening torque for terminals		
	Auxiliary circuit min	Nm 1
	Auxiliary circuit max	Nm 1
	Auxiliary circuit min	lbin 0.74
	Auxiliary circuit max	lbin 0.74
UL/CSA and IEC/EN 60947-5-1 designation		B600-P600
<b>Ambient conditions</b>		
Operating temperature		
	min	°C -20
	max	°C 55
Storage temperature		
	min	°C -55
	max	°C 70
Compensation temperature		
	min	°C -15
	max	°C 55
Max altitude	m	3000
<b>Mechanical features</b>		
Operating position	normal allowable	Vertical plan ±30°
Fixing		Direct mounting on BG06... BG09... BG12...
Weight	g	116
<b>UL technical data</b>		
Full-load current (FLA) for three-phase AC motor		
	at 480V	A 0.33
	at 600V	A 0.33
<b>Dimensions</b>		

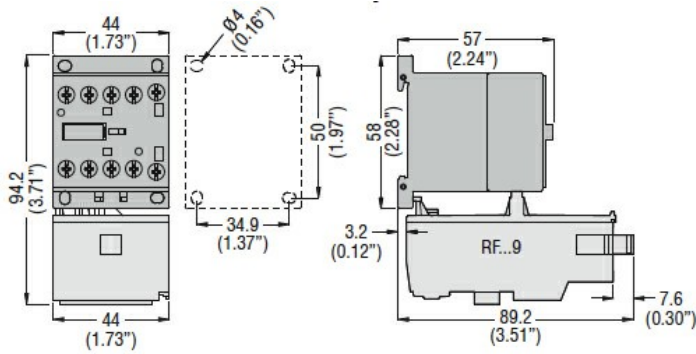

**Wiring diagrams**

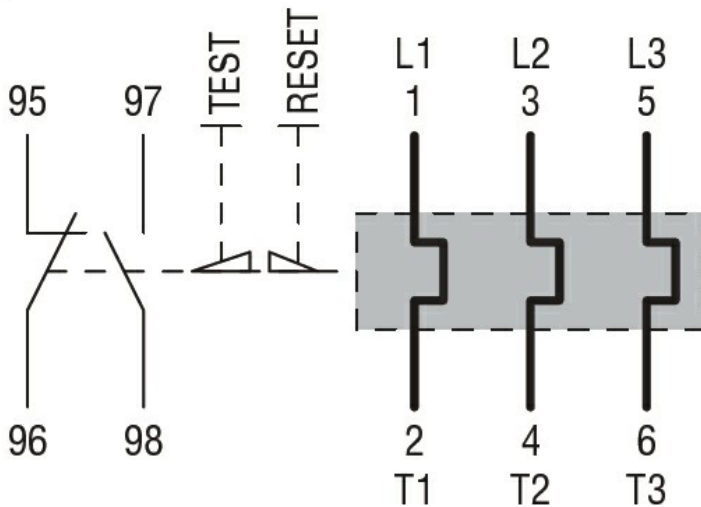

**Certifications and compliance**

Compliance

CSA C22.2 n° 14  
IEC/EN 60947-1  
IEC/EN 60947-4-1  
UL508

Certifications

CCC  
CSA  
cULus  
EAC

**ETIM classification**

ETIM 8.0

EC000106 -  
Thermal overload  
relay