





Product designation	11RFA9		
Product type designation	Motor protection relay		
<b>General characteristics</b>			
Number of poles	Nr.	3	
Overvoltage category	III		
Pollution degree	3		
Frontal IP degree	IP20		
Type of release	Thermal		
Protection fuse	aM (IEC)	A	0.25
Phase failure detection	yes		
Reset mode	Automatic		
<b>Power circuit characteristics</b>			
Rated insulation voltage $U_i$ IEC/EN	V	690	
Rated impulse withstand voltage $U_{imp}$	kV	8	
Rated operational voltage	V	690	
Operational frequency	min	Hz	0
	max	Hz	400
Operational current $I_e$	Operational current min	A	0.09
	Operational current max	A	0.15
Tripping class	10A		
Test Button	Yes		
Trip indicator	yes		
Terminals	type	screw and washer	
	screw	M4	
	width	mm	9.8
	tool	Phillips 2	
Tightening torque for terminals	min	Nm	2.3
	max	Nm	2.3
	min	Ibin	1.7
	max	Ibin	1.7
Conductor section	AWG/kcmil max	10	
<b>Auxiliary circuit characteristics</b>			
Auxiliary contacts	NO	Nr.	1
	NC	Nr.	1
Auxiliary Rated insulation voltage $U_i$ IEC/EN	V	690	
Auxiliary Rated impulse withstand voltage $U_{imp}$	kV	6	

Auxiliary Rated operational voltage	V	690
Operating current AC15	24V	A 1.5
	120V	A 1.5
	240V	A 0.75
IEC Conventional free air thermal current I <sub>th</sub>	A	10
Terminals	Auxiliary circuit type	screw and washer
	Auxiliary circuit screw	M3,5
	Auxiliary circuit width	mm 8
	Auxiliary circuit tool	Phillips 1
Conductor section	Auxiliary circuit Flexible w/o lug max	mm <sup>2</sup> 2.5
	Auxiliary circuit Flexible c/w lug max	mm <sup>2</sup> 2.5
Tightening torque for terminals	Auxiliary circuit min	Nm 1
	Auxiliary circuit max	Nm 1
	Auxiliary circuit min	lbin 0.74
	Auxiliary circuit max	lbin 0.74
UL/CSA and IEC/EN 60947-5-1 designation		C300-R300
<b>Ambient conditions</b>		
Operating temperature	min °C	-20
	max °C	55
Storage temperature	min °C	-55
	max °C	70
Compensation temperature	min °C	-15
	max °C	55
Max altitude	m	3000
<b>Mechanical features</b>		
Operating position	normal allowable	Vertical plan ±30°
Fixing		Direct mounting on BG06... BG09... BG12...
Weight	g	116
<b>UL technical data</b>		
Full-load current (FLA) for three-phase AC motor	at 480V	A 0.15
	at 600V	A 0.15
<b>Dimensions</b>		

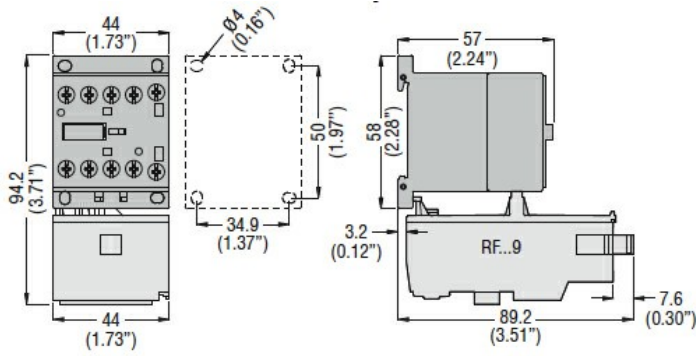

### Wiring diagrams

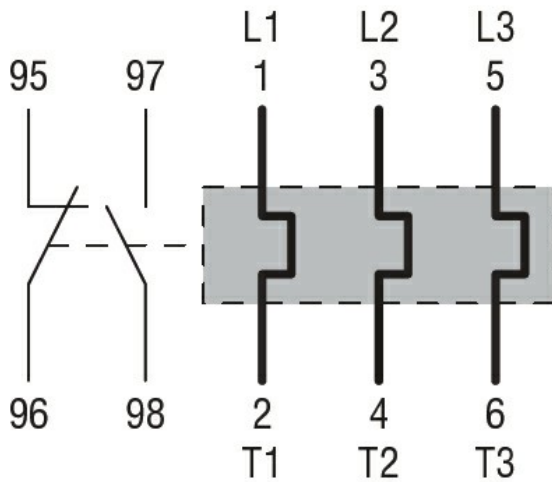

### Certifications and compliance

#### Compliance

CSA C22.2 n° 14  
IEC/EN 60947-1  
IEC/EN 60947-4-1  
UL508

#### Certifications

CCC  
CSA  
cULus  
EAC

### ETIM classification

ETIM 8.0

EC000106 -  
Thermal overload  
relay