
SELECTOR SWITCH ACTUATOR KEY Ø22MM PLATINUM SERIES CHROMED PLASTIC, 3 POSITION, 1 - 0 < 2 WITH DIFFERENT KEY CODE. WITHDRAL AT 0



Product designation				Selector switch actuator key - 3 position
Product type designati	ion			LPCS36
General characteristics	S			
Colour				Black
Type of positions				1 - 0 < 2, key extraction in 0
Material				Polyamide
IEC degree of protecti	ion			IP66, IP67 and IP69K
Mechanical features				
Mechanical life			cycles	1000000
Mounting adapter				LPXAU120
Weight			g	60
UL technical data				
UL degree of protection	on			Type1, 2, 3R, 4, 4X, 12, 12K
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-25
		max	°C	+70
	Storage temperature			
		min	°C	-40
		max	°C	+85
Dimensions				

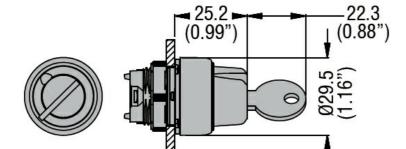

Certifications and compliance

Compliance

CSA C22.2 n° 14

KOV

IEC/EN/BS 60947-1

IEC/EN/BS 60947-5-1 UL508

Certificates

CCC



LPCS360R421E

SELECTOR SWITCH ACTUATOR KEY Ø22MM PLATINUM SERIES CHROMED PLASTIC, 3
POSITION, 1 - 0 < 2 WITH DIFFERENT KEY CODE. WITHDRAL AT 0

cULus

ETIM classification

ETIM 8.0

EC000222 -Front element for selector switch