




Product designation Product type designation				Selector switch actuator key - 3 position LPCS39
General characteristics				
Colour				Black
Type of positions				1 - 0 < 2, key extraction in 1
Material				Polyamide
IEC degree of protection				IP66, IP67 and IP69K
Mechanical features				
Mechanical life			cycles	1000000
Mounting adapter				LPXAU120
Weight			g	60
UL technical data				
UL degree of protection				Type1, 2, 3R, 4, 4X, 12, 12K
Ambient conditions				
Temperature				
Оре	erating temperature			
		min	°C	-25
		max	°C	+70
Sto	rage temperature			
		min	°C	-40
		max	°C	+85

Dimensions

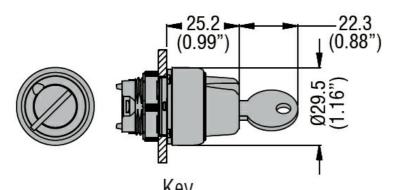

Certifications and compliance

Compliance <u>CSA C22.2 n° 14</u> <u>IEC/EN/BS 60947-1</u> <u>IEC/EN/BS 60947-5-1</u> UL508 Certificates <u>CCC</u>

## LPCS390R520E The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding



## LPCS390R520E SELECTOR SWITCH ACTUATOR KEY Ø22MM PLATINUM SERIES CHROMED PLASTIC, 3 POSITION, 1 - 0 < 2 WITH DIFFERENT KEY CODE. WITHDRAL AT 1

cULus

ETIM classification

ETIM 8.0

EC000222 -Front element for selector switch