




Product designation Product type designation				Selector switch actuator key - 3 position LPCS39
General characterist	ics			
Colour				Black
Type of positions				1 - 0 < 2, key extraction in 1
Material				Polyamide
IEC degree of protection				IP66, IP67 and IP69K
Mechanical features				
Mechanical life			cycles	1000000
Mounting adapter				LPXAU120
Weight			g	60
UL technical data				
UL degree of protection				Type1, 2, 3R, 4, 4X, 12, 12K
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-25
		max	°C	+70
	Storage temperature			
		min	°C	-40
		max	°C	+85

Dimensions

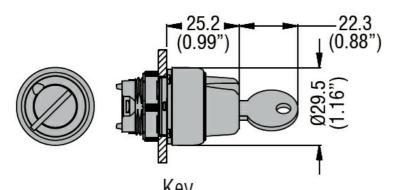

Certifications and compliance

Compliance		
	CSA C22.2 n° 14	
	IEC/EN/BS 60947-1	
	IEC/EN/BS 60947-5-1	
	UL508	
Certificates		
	CCC	



LPCS390R621E SELECTOR SWITCH ACTUATOR KEY Ø22MM PLATINUM SERIES CHROMED PLASTIC, 3 POSITION, 1 - 0 < 2 WITH DIFFERENT KEY CODE. WITHDRAL AT 1

cULus

ETIM classification

ETIM 8.0

EC000222 -Front element for selector switch