



LED elements  
steady light base  
mount on LPZ  
control station  
LPXLPB

Product designation

Product type designation

**General characteristics**

Colour Green

**Electrical characteristics**

Rated frequency Hz 50-60

Supply voltage (AC) V 12...30

**Operations**

Electrical life hours 100000

**Mechanical features**

Conductor section

AWG/kcmil conductor section

max 14

IEC

max mm<sup>2</sup> 1 or 2 / 2.5

Mounting adapter LPXAU120

Weight g 16

**Ambient conditions**

Temperature

Operating temperature

min °C -25

max °C +70


Storage temperature

min °C -40


max °C +85

**Dimensions**

Mounting position on the LPZ control station base

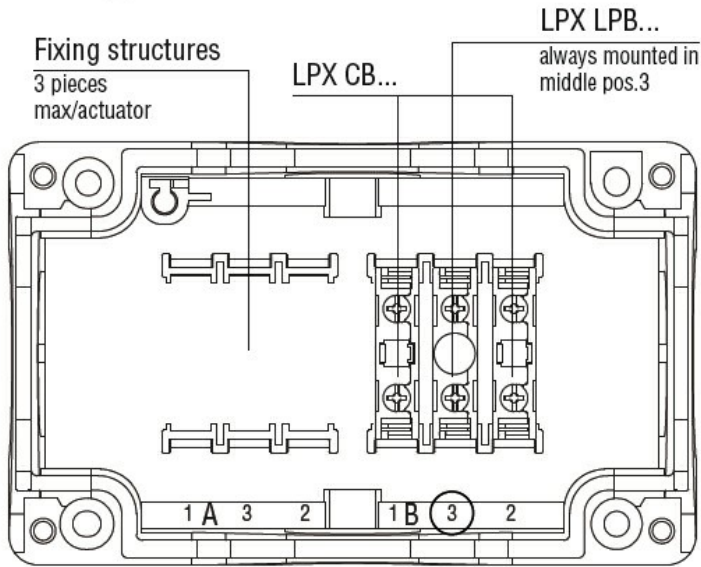

Wiring diagrams

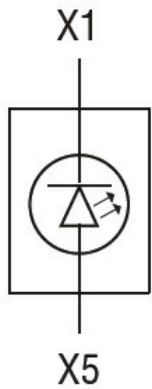

Certifications and compliance

Compliance

CSA C22.2 n° 14  
IEC/EN/BS 60947-1  
IEC/EN/BS 60947-5-1  
UL508

Certificates

CCC  
cULus  
EAC  
RINA  
UL

ETIM classification

ETIM 8.0

EC000204 -  
Lamp holder  
block for control  
circuit devices