




LED ELEMENT, STEADY LIGHT, BASE MOUNT ON LPZ... CONTROL STATIONS Ø22MM PLATINUM SERIES, 85...140VAC. BLUE




Product designation				LED elements steady light base mount on LPZ control station
Product type designat				LPXLPB
General characteristic	S			
Colour				Blue
Electrical characteristi	CS			
Rated frequency			Hz	50-60
Supply voltage (AC)			V	85140
Operations				
Electrical life			hours	100000
Mechanical features				
Conductor section				
	AWG/kcmil conductor section			
		max		14
	IEC			
		max	mm²	1 or 2 / 2.5
Mounting adapter				LPXAU120
Weight			g	16
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-25
		max	°C	+70
	Storage temperature			_
	•	min	°C	-40
		max	°C	+85
Dimensions				

LED ELEMENT, STEADY LIGHT, BASE MOUNT ON LPZ... CONTROL STATIONS Ø22MM PLATINUM SERIES, 85...140VAC. BLUE

Mounting position on the LPZ control station base

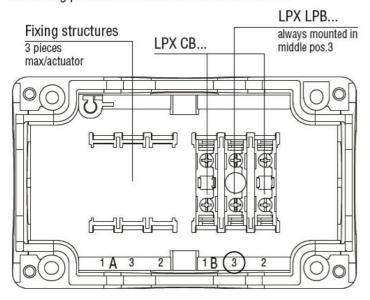

Wiring diagrams



Certifications and compliance

Compliance

CSA C22.2 n° 14 IEC/EN/BS 60947-1

IEC/EN/BS 60947-5-1

UL508

Certificates

CCC

cULus

EAC

RINA UL

ETIM classification

ETIM 8.0

EC000204 -Lamp holder block for control circuit devices