

| | | | | |
|--|---------------------------------------|-----------------|-----------------|---------------------------------------|
| Product designation | | | | Enclosed rotary cam switch |
| Product type designation | | | | GN200 |
| General characteristics | | | | |
| Switching diagram | | | | 94 - Multi-step 1-2-3-4 3 poles |
| N° of elements | | | | 6 |
| Mounting form | | | | L - Metal enclosure with black handle |
| Contact characteristics | | | | |
| Rated insulation voltage Ui | IEC/EN | V | 690 | |
| | UL/CSA | V | 600 | |
| Rated impulse withstand voltage Uimp | | | kV | 8 |
| Conventional free air thermal current Ith | IEC/EN | A | 200 | |
| | UL/CSA | A | 200 | |
| Rated operational voltage | | | V | 690 |
| Rated operational impulse voltage | | | kV | 6 |
| Maximum fuse size for short-circuit protection In (gG) | 10kA | A | 200 | |
| | 15kA | A | 200 | |
| Rated short time current Icw | | | 1s | kA |
| | | | | 3300 |
| Operational current Ie IEC/EN AC1/AC21A | | | A | 200 |
| | | | | |
| Rated operational power in AC Three-phase AC-3 | 220/230V | kW | 27.5 | |
| | 380/440V | kW | 47 | |
| Rated operational current in DC DC21A | 48V | A | 200 | |
| | 60V | A | 200 | |
| | 110V | A | 35 | |
| | 220V | A | 2.5 | |
| | 440V | A | 0.9 | |
| Power dissipation | | | W | 26 |
| Mechanical features | | | | |
| Terminals screw | | | | M10 |
| Tightening torque for terminals max | | | | Nm 10 |
| Conductor size | AWG - Rigid cable | Max | AWG | 1X3 |
| | | | | |
| | AWG - Flexible cable | Max | AWG | 0 |
| | | | | |
| | Conductor size (IEC) - Flexible cable | Max | mm ² | 1X95 |
| Conductor size (IEC) - Rigid cable | Max | mm ² | 1X95 | |
| Mechanical life | | | | cycles 2X10 ⁵ |

UL technical data

Motor power for direct-on-line control

for three-phase motor

| | | |
|------|----|-----|
| 120V | HP | 30 |
| 240V | HP | 50 |
| 480V | HP | 100 |
| 600V | HP | 75 |

for single-phase motor

| | | |
|------|----|----|
| 120V | HP | 15 |
| 240V | HP | 30 |

Ambient conditions

Temperature

Operating temperature

| | | |
|-----|----|-----|
| min | °C | -25 |
| max | °C | +55 |

Storage temperature

| | | |
|-----|----|-----|
| min | °C | -40 |
| max | °C | +70 |

Resistance & Protection


Frontal IP degree

IP54

Terminals IP degree


IP00

Dimensions

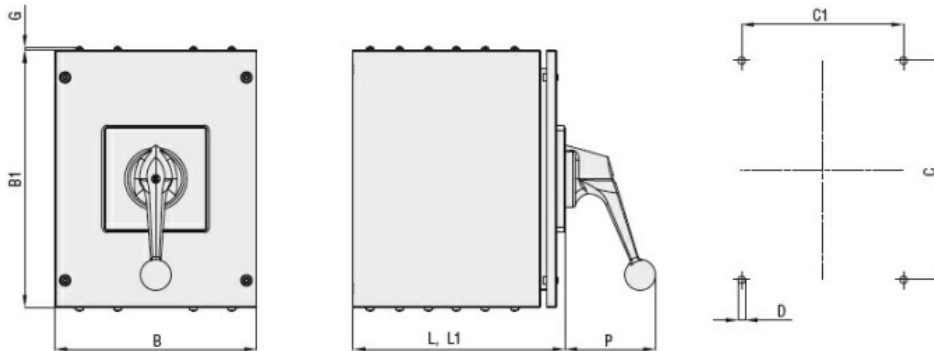

| Series | Enclosure size | Number of elements | | Dimensions | | | | | | | | | Protection degree |
|--------|----------------|--------------------|-------|------------|-----|-----|-----|-----|-----|---|-----|----|-------------------|
| | | L | L1 | L | L1 | B | B1 | C | C1 | D | G | P | |
| GN200 | 250x316 | 1 - 3 | 4 - 6 | 162 | 252 | 250 | 316 | 270 | 200 | 9 | 4.5 | 98 | IP54 |
| GN315 | | 1 - 3 | 4 - 6 | 162 | 252 | 250 | 316 | 270 | 200 | 9 | 4.5 | 98 | IP54 |

Wiring diagrams



| | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|--|---|---|---|
| 1 | X | | | X | | | X | | | | | | |
| 2 | | X | | | X | | | | X | | | X | |
| 3 | | | X | | | X | | X | | | | | X |
| 4 | | X | | | X | | | | X | | X | | |

83 —
87 —
94 —

Certifications and compliance

Compliance

IEC/EN/BS 60947-1

IEC/EN/BS 60947-3

IEC/EN/BS 60947-5-1

ETIM classification

ETIM 8.0

EC001029 -
Selector switch,
complete