





Product designation				Switch disconnecter with fuse
Product type designation				GE
Type of fuse				NH
Number of poles	Nr.			3
Operating voltage type				AC
Contact characteristics				
IEC Conventional free air thermal current I _{th}	A			630
Rated insulation voltage U _i IEC/EN	V			1000
Rated impulse withstand voltage U _{imp}	kV			12
Operating current I _e				
AC21A				
	400V	A	630	
	500V	A	630	
	690V	A	630	
AC22A				
	400V	A	630	
	500V	A	630	
	690V	A	630	
AC23A				
	400V	A	630	
	500V	A	630	
	690V	A	400	
Power dissipation per pole max		W	44	
Rated operational power AC23A				
	400V	kW	355	
	690V	kW	370	
Conditional short-circuit current (rms)		kA	100	
Specific let through energy I ² t		kA ² s	4.6	
Making capacity AC23A 400V		A	6300	
Breaking capacity AC23A 400V		A	5100	
Mechanical life		cycles	5000	
Electrical life AC21A		cycles	1000 (AC23A 400V)	
Mechanical features				
Operating position		normal allowable	Vertical plan Any	
Fixing			Screw	
Terminals		type screw	Bar M12	
Tightening torque for terminals				
	max	Nm	45	
	max	lbin	33	

Bar dimensions max	40x6		
Ambient conditions			
Operating temperature	min	°C	-25
	max	°C	55
Storage temperature	min	°C	-40
	max	°C	70
Max altitude	m		3000
Resistance & Protection			
Frontal IP degree	IP20		
Pollution degree	3		

Dimensions

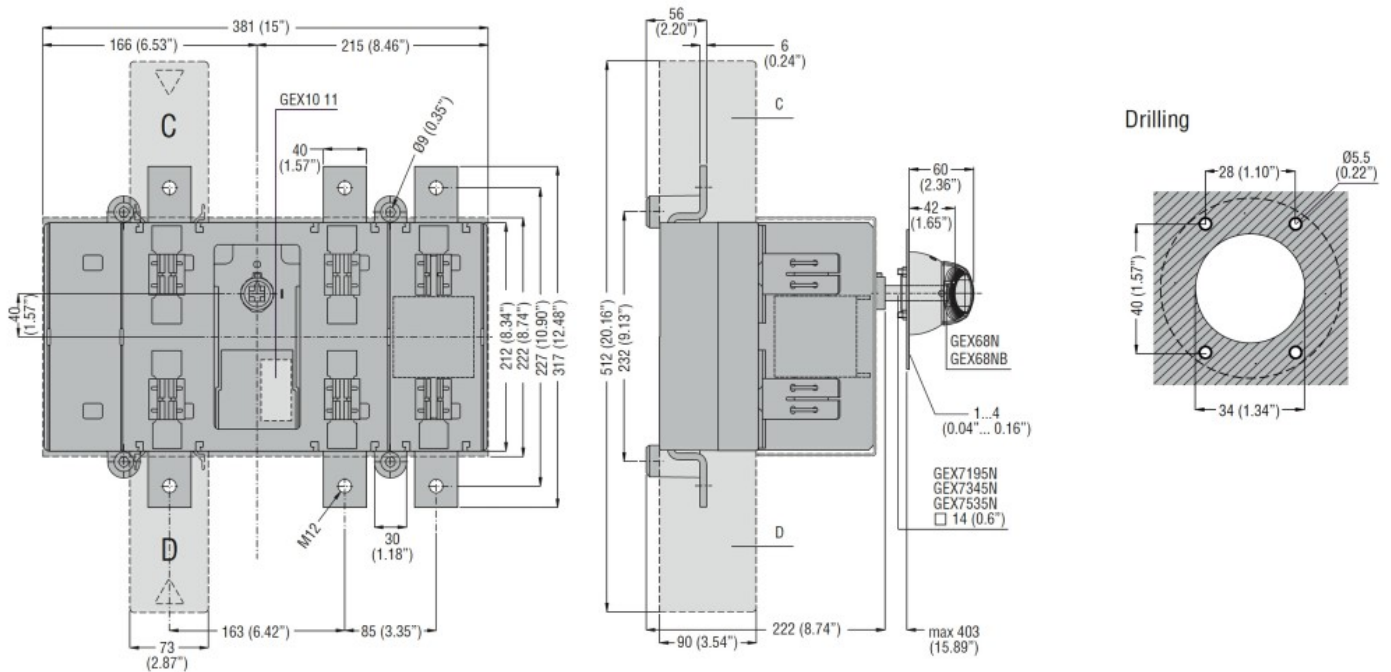

Wiring diagrams

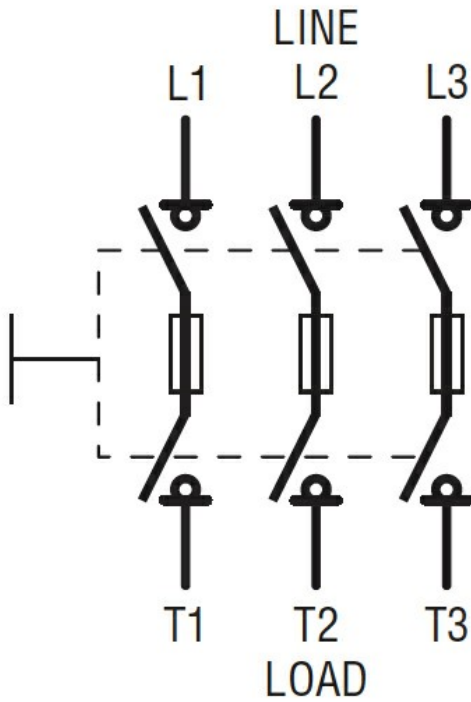

Certifications and compliance

Compliance

IEC/EN 60947-1

IEC/EN 60947-3

Certifications

EAC

ETIM classification

ETIM 8.0

EC000216 -
 Switch
 disconnecter