

ENERGY AND AUTOMATION



Product designation			Power contactor
Product type designation			BGF09
Contact characteristics			
Number of poles		Nr.	3
Rated insulation voltage Ui IEC/EN		V	690
Rated impulse withstand voltage Uimp		kV	6
Operational frequency			
	min	Hz	25
	max	Hz	400
IEC Conventional free air thermal current Ith		Α	20
Operational current le			
	AC-1 (≤40°C)	Α	20
	AC-1 (≤55°C)	Α	18
	AC-1 (≤70°C)	Α	15
	AC-3 (≤440V ≤55°C)	Α	9
	AC-4 (400V)	Α	4
Rated operational power AC-3 (T≤55°C)	,		
	230V	kW	2.2
	400V	kW	4
	415V	kW	4.3
	440V	kW	4.5
	500V	kW	5
	690V	kW	5
Rated operational power AC-1 (T≤40°C)	0001		
Traised operational power 7to 1 (1240 0)	230V	kW	8
	400V	kW	14
	500V	kW	16
	690V	kW	22
IEC max current le in DC1 with L/R ≤ 1ms with 1 poles in series	090 V	KVV	22
TEC max current le in DCT with E/1(3 mis with 1 poles in series	≤24V	Α	12
	48V	A	10
	75V		
	110V	A A	4 3
	220V		3
IFC many asymptotic in DC4 with L/D < 4 may with 2 males in social	220 V	Α	_
IEC max current le in DC1 with L/R ≤ 1ms with 2 poles in series	2011	۸	4.5
	≤24V	A	15
	48V	A	14
	75V	Α	9
	110V	A	8
150	220V	Α	_
IEC max current le in DC1 with L/R ≤ 1ms with 3 poles in series			
	≤24V	Α	16
	48V	Α	16
	75V	Α	10
	110V	Α	10
	220V	Α	2



THREE-POLE CONTACTOR, IEC OPERATING CURRENT IE (AC3) = 9A, DC COIL, 12VDC, 1NO AUXILIARY CONTACT, FASTON TERMINALS

IEC max current le in DC1 with L/R ≤ 1ms with 4 poles in series ≤24V Α 16 Α 48V 16 75V Α 10 110V 10 Α 220V 2 IEC max current le in DC3-DC5 with L/R ≤ 15ms with 1 poles in series ≤24V 7 Α 48V Α 6 75V 2 Α 110V 1 Α 220V Α IEC max current le in DC3-DC5 with L/R ≤ 15ms with 2 poles in series ≤24V 8 Α 48V Α 8 75V 5 Α 110V Α 4 220V Α IEC max current le in DC3-DC5 with L/R ≤ 15ms with 3 poles in series ≤24V Α 10 48V Α 10 75V 6 Α 110V 5 Α 220V 0.8 IEC max current le in DC3-DC5 with L/R ≤ 15ms with 4 poles in series ≤24V Α 10 48V Α 10 75V Α 6 5 110V Α 220V Α 0,8 Short-time allowable current for 10s (IEC/EN60947-1) 96 Protection fuse gG (IEC) Α 20 aM (IEC) Α 10 Making capacity (RMS value) Α 92 Breaking capacity at voltage 440V Α 72 72 500V Α 690V Α 72 Resistance per pole (average value) $m\Omega$ 10 Power dissipation per pole (average value) Ith W 4 AC-3 W 0.81 Tightening torque for terminals 0.8 min Nm Nm 1 max 9 min lbin Ibin 9 max Tightening torque for coil terminal min Nm 0.8 Nm 1 max min Ibin 9 max Ibin 9



electric THREE-POLE CONTACTOR, IEC OPERATING CURRENT IE (AC3) = 9A, DC COIL, 12VDC, 1NO
AUXILIARY CONTACT, FASTON TERMINALS

ENERGY AND AUTOMATION

	simultaneously connectable		Nr.	2
Conductor section	A1A/Q/// are il			
	AWG/Kcmil	max		12
	Flexible w/o lug conductor section	IIIdx		12
	Tickible wie lag conductor section	min	mm²	0.75
		max	mm²	2.5
	Flexible c/w lug conductor section			
	Ç .	min	mm²	1.5
		max	mm²	2.5
	Flexible with insulated spade lug conductor section	n		
		min	mm²	1.5
		max	mm²	2.5
	ction according to IEC/EN 60529			IP20 when properly wired
Mechanical features				
Operating position		_		
		normal		Vertical plan
		allowable		±30° Screw / DIN rail
Fixing				35mm
Weight			g	220
Conductor section	ANNO (1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1			
	AWG/kcmil conductor section			40
Auxiliary contact chara	actoristics	max		12
Thermal current Ith	aciensiles		А	10
IEC/EN 60947-5-1 de	signation			A600 - Q600
Operating current AC	~			
, 0		230V	Α	3
		400V	Α	1.9
		500V	Α	1.4
Operating current DC	12			
		110V	Α	2.9
Operating current DC	13			
		24V	A	2.9
		48V	A	1.4
		60V 125V	A A	1.1 0.3
		125V 220V	A	0.3
		600V	A	0.6
Operations		0001	,,	0.0
Mechanical life			cycles	20000000
Electrical life			cycles	500000
Safety related data				
Performance level B1	0d according to EN/ISO 13489-1			
		rated load	cycles	500000
		mechanical load	cycles	20000000
	ing to IEC/EN 609474-4-1			yes
EMC compatibility				yes
DC coil operating	an		V	12
DC rated control volta DC operating voltage	y c		V	۱۷
Do operating voltage				



electric THREE-POLE CONTACTOR, IEC OPERATING CURRENT IE (AC3) = 9A, DC COIL, 12VDC, 1NO AUXILIARY CONTACT, FASTON TERMINALS


ENERGY AND AUTOMATION

	pick-up			
	p.o.t op	min	%Us	75
		max	%Us	115
	drop-out			_
		min	%Us	10
		max	%Us	25
Average coil consumpt	ion ≤20°C			
		in-rush	W	3.2
Max cycles frequency		holding	W	3.2
Mechanical operation			cycles/h	3600
Operating times			0,0100/11	0000
Average time for Us co	ntrol			
•	in AC			
	Closing NC	1		
		min	ms	12
		max	ms	21
	Opening No			•
		min	ms	9
	Closing NC	max	ms	18
	Closing NC	min	ms	17
		max	ms	26
	Opening No			
	, ,	min	ms	7
		max	ms	17
	in DC			
	Closing NC			
		min	ms	18
	O N	max	ms	25
	Opening No		m .a	2
		min max	ms ms	2 3
	Closing NC		1113	3
		min	ms	3
		max	ms	5
	Opening No			
		min	ms	11
		max	ms	17
UL technical data				
Full-load current (FLA)	for three-phase AC motor		_	
		at 480V	A	7.6
Yielded mechanical pe	formanco	at 600V	Α	6.1
rielded mechanical pe	for single-phase AC motor			
	Tot single-phase Ac motor	110/120V	HP	0.5
		230V	HP	1.5
	for three-phase AC motor	2301	• • •	
	,	200/208V	HP	2
		220/230V	HP	3
		460/480V	HP	5
		575/600V	HP	5
General USE				
	Contactor			

ENERGY AND AUTOMATION

THREE-POLE CONTAC	TOR, IEC OPERATING CURRENT IE (AC3) = 9A, DC COIL, 12VDC, 1NO
•	AUXILIARY CONTACT, FASTON TERMINALS
ON	


		AC current	Α	20
Short-circuit protect	ion fuse, 600V			
	High fault			
		Short circuit current	kA	100
		Fuse rating	Α	30
		Fuse class		J
	Standard fault			
		Short circuit current	kA	5
		Fuse rating	Α	30
Contact rating of auxiliary contacts according to UL			A600 - Q600	
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-50
		max	°C	+70
	Storage temperature			
		min	°C	-60
		max	°C	+80
Max altitude			m	3000
Resistance & Prote	ction			
Pollution degree				3
Dimensions				

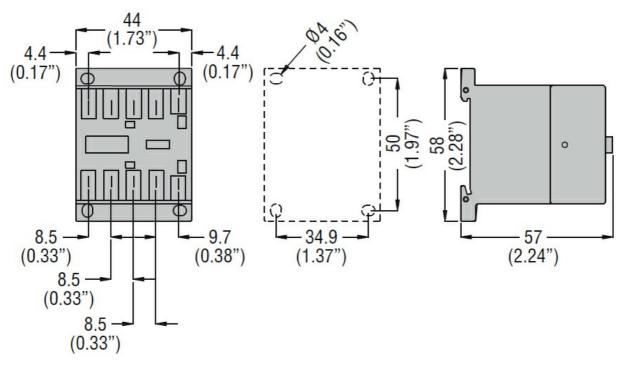

Wiring diagrams

electric THREE-POLE CONTACTOR, IEC OPERATING CURRENT IE (AC3) = 9A, DC COIL, 12VDC, 1NO AUXILIARY CONTACT, FASTON TERMINALS

ENERGY AND AUTOMATION



Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60947-1

IEC/EN 60947-4-1

UL 60947-1

UL 60947-4-1

Certificates

CCC

cULus

EAC

ETIM classification

ETIM 8.0

EC000066 -Power contactor, AC switching