



CONTACTOR FOR POWER FACTOR CORRECTION WITH AC CONTROL CIRCUIT, INCLUDING LIMITING RESISTORS, MAXIMUM IEC OPERATIONAL POWER 400V = 75KVAR, COIL 400VAC 50/60HZ



| Product designation | | | Power contactor |
|---|----------|--------------|-----------------|
| Product type designation Contact characteristics | | | BFK115 |
| Number of poles | | Nr. | 3 |
| Rated insulation voltage Ui IEC/EN | | V | 690 |
| | | kV | 8 |
| Rated impulse withstand voltage Uimp | | KV | 0 |
| Operational frequency | | 1.1- | 0.5 |
| | min | Hz | 25 |
| IFO Occupational formation and the second second life | max | Hz | 400 |
| IEC Conventional free air thermal current Ith | | A | 160 |
| Rated operational power AC-6b (T≤40°C) | | _ | |
| | 230V | kvar | 45 |
| | 400V | kvar | 75 |
| | 440480V | kvar | 85 |
| | 690V | kvar | 135 |
| Short-time allowable current for 10s (IEC/EN60947-1) | | Α | 920 |
| Protection fuse | | | |
| | gG (IEC) | Α | 160 |
| Making capacity (RMS value) | | Α | 1500 |
| Breaking capacity at voltage | | | |
| | 440V | Α | 1200 |
| | 500V | Α | 850 |
| | 690V | Α | 905 |
| Resistance per pole (average value) | | mΩ | 0.45 |
| Power dissipation per pole (average value) | | | |
| | lth | W | 11.5 |
| Tightening torque for terminals | | | |
| Tightoning torque for tominate | min | Nm | 6 |
| | max | Nm | 7 |
| | min | lbin | 4.4 |
| | max | lbin | 5.2 |
| Tightening torque for coil terminal | IIIax | IDIII | 5.2 |
| righterning torque for conteminal | min | Nm | 0.8 |
| | min | | |
| | max | Nm | 1 |
| | min | lbin Ibin | 0.59 |
| May number of wires simultaneously same stable | max | Ibin | 0.74 |
| Max number of wires simultaneously connectable | | Nr. | 2 |
| Conductor section | | | |
| AWG/Kcmil | | | 0.40 |
| | max | | 2/0 |
| Flexible w/o lug conductor section | | _ | |
| | min | mm² | 1.5 |
| | max | mm² | 70 |
| | | | |
| Flexible c/w lug conductor section | min | mm² | 1.5 |






CONTACTOR FOR POWER FACTOR CORRECTION WITH AC CONTROL CIRCUIT, INCLUDING LIMITING RESISTORS, MAXIMUM IEC OPERATIONAL POWER 400V = 75KVAR, COIL 400VAC 50/60HZ

| | | max | mm² | 70 |
|-------------------------|---------------------------------|-----------------|------------|--------------------------|
| | tion according to IEC/EN 60529 | | | IP20 front |
| Mechanical features | | | | |
| Operating position | | | | |
| | | normal | | Vertical plan |
| | | allowable | | ±30° |
| Fixing | | | | Screw / DIN rail 35mm |
| Weight | | | g | 2095 |
| Conductor section | | | <u> </u> | |
| | AWG/kcmil conductor section | | | |
| | | max | | 2/0 |
| Operations | | | | |
| Mechanical life | | | cycles | 15000000 |
| Electrical life | | | cycles | 1200000 |
| Safety related data | | | | |
| Performance level B10 | Od according to EN/ISO 13489-1 | | | |
| | | rated load | cycles | 400000 |
| | | mechanical load | cycles | 15000000 |
| EMC compatibility | | | | yes |
| AC coil operating | | | | |
| Rated AC voltage at 5 | 0/60Hz | | V | 400 |
| AC operating voltage | | | | |
| | of 50/60Hz coil powered at 50Hz | | | |
| | pick-up | | 0/11 | |
| | | min | %Us | 80 |
| | draw aut | max | %Us | 110 |
| | drop-out | min | 0/116 | 20 |
| | | min | %Us %Us | 20 55 |
| | of 50/60Hz coil powered at 60Hz | max | /005 | 33 |
| | pick-up | | | |
| | plot up | min | %Us | 85 |
| | | max | %Us | 110 |
| | drop-out | | ,,,, | |
| | • | min | %Us | 40 |
| | | max | %Us | 55 |
| AC average coil consu | ımption at 20°C | | | |
| | of 50/60Hz coil powered at 50Hz | | | |
| | | holding | VA | 20 |
| | of 50/60Hz coil powered at 60Hz | | | |
| | | in-rush | VA | 300 |
| | | holding | VA | 17 |
| | of 60Hz coil powered at 60Hz | | | |
| | | in-rush | VA | 300 |
| District of the LP | 400°0 FOLL | holding | VA | 20 |
| Dissipation at holding: | ≤20°C 50Hz | | W | 6.5 |
| Max cycles frequency | | | avels:// | 1500 |
| Mechanical operation | | | cycles/h | 1500 |
| Operating times | and trail | | | |
| Average time for Us co | | | | |
| | in AC | | | |
| | Closing NO | min | me | 16 |
| | | 111111 | ms | 10 |



CONTACTOR FOR POWER FACTOR CORRECTION WITH AC CONTROL CIRCUIT, INCLUDING LIMITING RESISTORS, MAXIMUM IEC OPERATIONAL POWER 400V = 75KVAR, **COIL 400VAC 50/60HZ**

| | | max | ms | 32 | |
|-----------------------|-----------------------|------------|------------|----|------|
| | | Opening NO | | | |
| | | | | ms | 9 |
| | | | max | ms | 24 |
| UL technical data | | | | | |
| General USE | | | | | |
| | Contactor | | | | |
| | | | AC current | Α | 160 |
| Ambient conditions | | | | | |
| Temperature | | | | | |
| | Operating temperature | | | | |
| | | | min | °C | -50 |
| | | | max | °C | 70 |
| | Storage temperature | | | | |
| | | | min | °C | -60 |
| | | | max | °C | 80 |
| Max altitude | | | | m | 3000 |
| Resistance & Protecti | on | | | | |
| Pollution degree | | | | | 3 |
| Dimensions | | | | | |

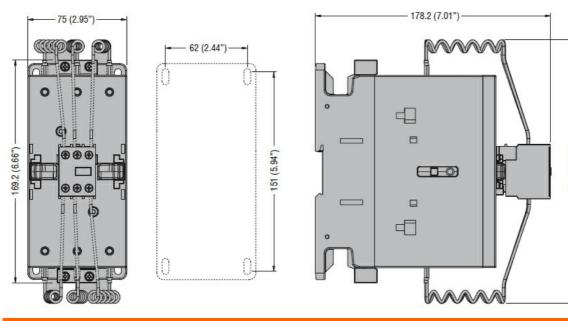


Wiring diagrams



ENERGY AND AUTOMATION

CONTACTOR FOR POWER FACTOR CORRECTION WITH AC CONTROL CIRCUIT, INCLUDING LIMITING RESISTORS, MAXIMUM IEC OPERATIONAL POWER 400V = 75KVAR, COIL 400VAC 50/60HZ

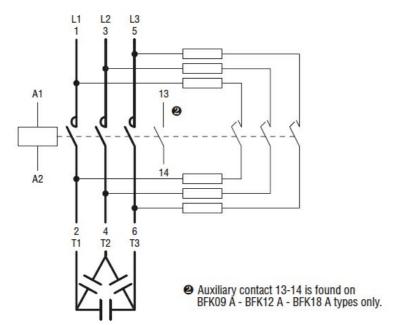

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN/BS 60947-1

IEC/EN/BS 60947-4-1

UL 60947-1

UL 60947-4-1

Certificates

CCC

cULus

ETIM classification

ETIM 8.0

BFK11500A400

EC001079 -Capacitor contactor