SM1P0040

MOTOR PROTECTION CIRCUIT BREAKER, IEC BREAKING CAPACITY ICU 100KA AT 400V, 0.25...0.4A

Electrical features			
Number of poles		Nr.	3
Magnetic protection			yes
Thermal protection			yes
Phase failure detection			yes
Rated insulation voltage Ui IEC/EN		V	690
Rated impulse withstand voltage Uimp		kV	6
Rated frequency		Hz	50/60
Thermal trip adjustment range			0.25…0.4
Rated current (In)		A	0.4
Magnetic tripping			13 x In
Power dissipation per pole			
	min	W	0.78
	max	W	1.99
Operational short-circuit current breaking capacity (Ics) at AC			
	230V	kA	100
	400V	kA	100
	440V	kA	100
	500V	kA	100
	690V	kA	100
Maximum short-circuit current breaking capacity (Icu) at AC			
	230V	kA	100
	400V	kA	100
	440V	kA	100
	500V	kA	100
	690V	kA	100
Tripping class			10A
IEC Utilization category			A
Operations			
Mechanical life		cycles	100000
Electrical life		cycles	100000
Mechanical features			
Tightening torque for terminals			
	min	Nm	2.5
	max	Nm	3
	min	lbin	22
	max	lbin	26.5
Max number of wires simultaneously connectable		Nr.	2
Conductor section			
AWG/Kcmil			
	min		16
	max		8
Flexible w/o lug conductor section			
	min	mm²	1
	max	mm²	10

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

	Flexible c/w lug conductor section			
		min	mm²	1
		max	mm²	10
	Flexible with insulated spade lug conductor section			
		min	mm²	1
		max	mm²	10
Screwdriver				PH2
Power terminal protection according to IEC/EN 60529				IP20 on front
Cable stripping lenght				
		main circuit	mm	12
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-20
		max	°C	+60
	Storage temperature			
		min	°C	-50
		max	°C	+80
	Compensation temperature			
		min	°C	-20
		max	°C	+50
Max altitude			m	3000
Operating position				
		normal		Vertical plan
		allowable		Any
Fixing				Screw / DIN rail 35mm
Weight			g	280
UL technical data				
Motor Disconnect				
		at 240V	kA	50
		at 480V	kA	50
		at 600V	kA	50
		protection		Fuse or CB
Group Motor Installation				
		at 240V	kA	50
		at 480V	kA	50
		at 600V	kA	50
		protection		Fuse or CB
Tap Conductor Protection				
		at 480Y/277V	kA	50
		at 600Y/347V	kA	50
Maximum UL/CSA horsepower ratings single-phase				
		110V-120V	HP	-
		220V-240V	HP	-
Maximum UL/CSA horsepower ratings three-phase, 3-pole				
		200V-208V	HP	-
		220V-240V	HP	-
		440V-480V	HP	-
		550V-600V	HP	-
Dimensions				

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

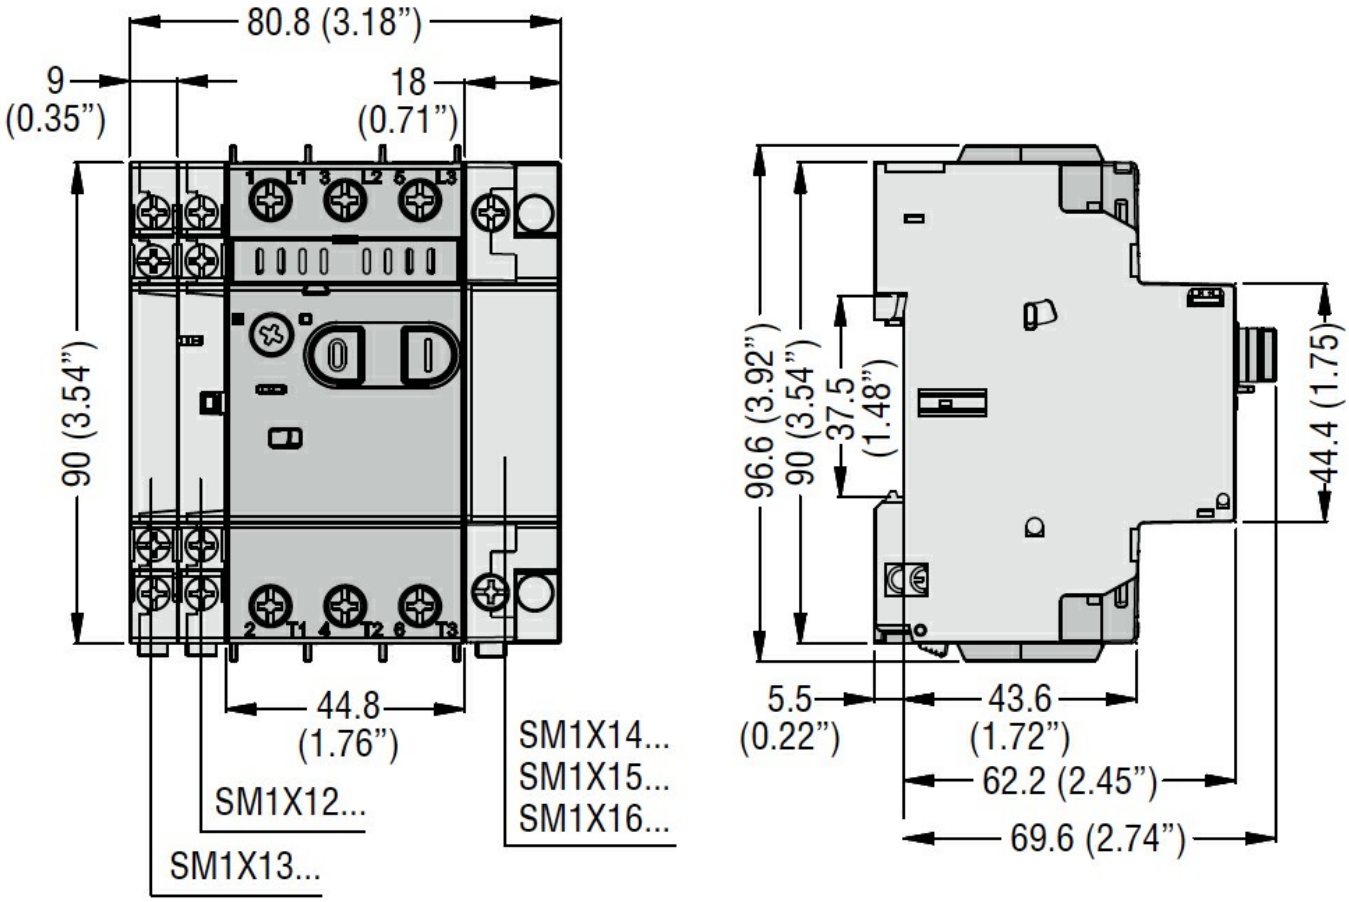

Wiring diagrams

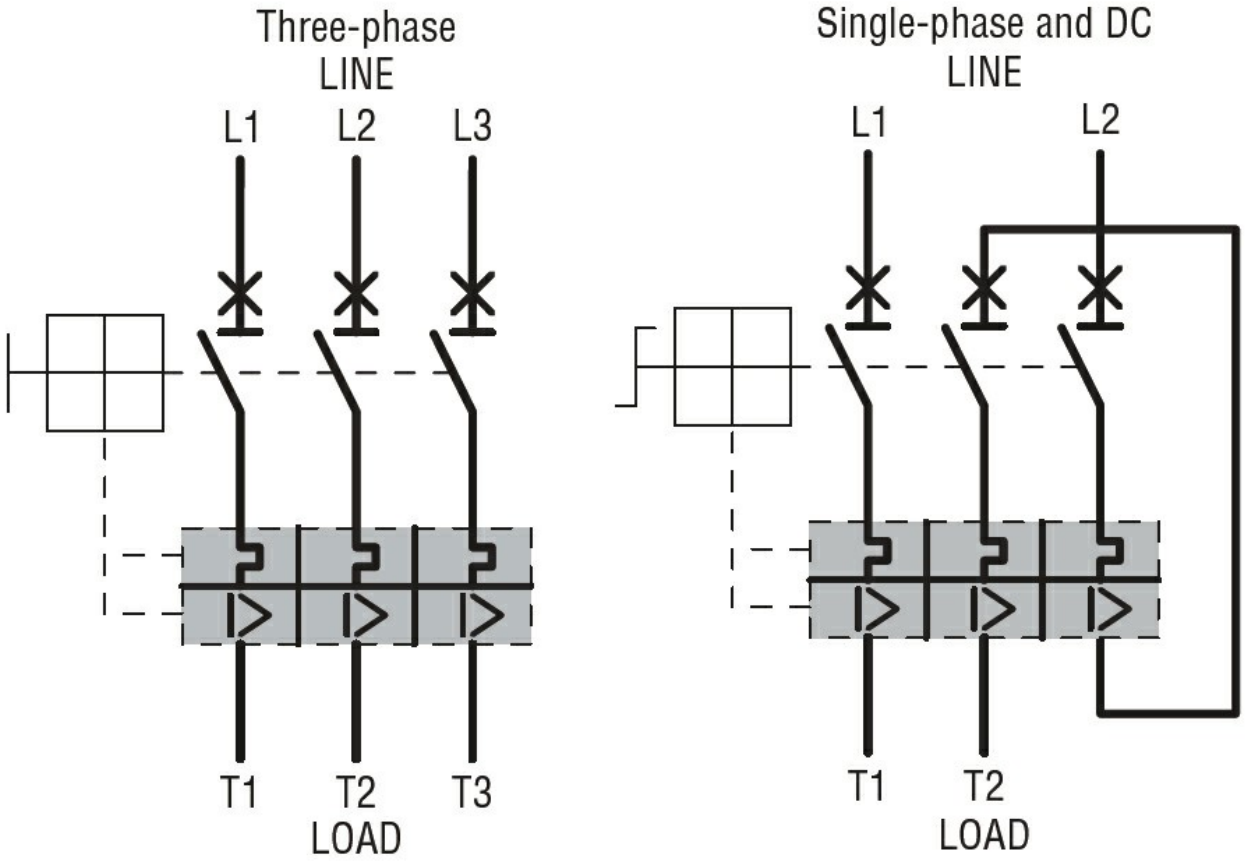

Certifications and compliance

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

Certifications

CSA C22.2 n° 14
IEC/EN 60947-1
IEC/EN 60947-2
IEC/EN 60947-4-1
UL508

Compliance

cULus
EAC

ETIM classification

ETIM 8.0	EC000074 - Motor protection circuit-breaker

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding