11RFN905



MOTOR PROTECTION RELAY, NON PHASE FAILURE/NON SINGLE-PHASE SENSITIVE. THREE-POLE (THREE-PHASE), MANUAL RESETTING. DIRECT MOUNTING ON BG06, BG09, BG12 MINI-CONTACTORS, 0.3...0.5A



Product designation			11RFN9
Product type designation			Motor protection relay
General characteristics			
Number of poles		Nr.	3
Overvoltage category			III
Pollution degree			3
Frontal IP degree			IP20
Type of release			Thermal
Protection fuse			
	gG (IEC)	А	2
	aM (IEC)	А	1
	RK5 (UL)	А	3
Phase failure detection			yes
Reset mode			Manual
Power circuit characteristics			
Rated insulation voltage Ui IEC/EN		V	690
Rated impulse withstand voltage Uimp		kV	8
Rated operational voltage		V	690
Operational frequency			
	min	Hz	0
	max	Hz	400
Operational current le			
	Operational current min	А	0.3
	Operational current max	A	0.5
Tripping class			10A
Test Button			Yes
Trip indicator			yes
Terminals			<i>j</i> 00
			screw and
	type		washer
	screw		M4
	width	mm	9.8
	tool		Phillips 2
Tightening torque for terminals			F ~
	min	Nm	2.3
	max	Nm	2.3
	min	Ibin	1.7
	max	Ibin	1.7
Conductor section	Пах	10111	
	AWG/kcmil max		10
Auxiliary circuit characteristics			10
Auxiliary contacts			
	NO	Nr.	1
	NC	Nr.	1
	INC.	INI.	I



Dimensions

11RFN905

11RFN905 MOTOR PROTECTION RELAY, NON PHASE FAILURE/NON SINGLE-PHASE SENSITIVE. THREE-POLE (THREE-PHASE), MANUAL RESETTING. DIRECT MOUNTING ON BG06, BG09, BG12 MINI-CONTACTORS, 0.3...0.5A


Auxiliary Rated insulation voltage Ui IEC/EN	V	690
Auxiliary Rated impulse withstand voltage Uimp	kV	6
Auxiliary Rated operational voltage	V	690
Operating current AC15		
24V	А	3
120V	А	3
240V	А	1.5
380V	Α	0.95
480V	А	0.75
500V	А	0.72
600V	A	0.6
Operating current DC13		
125V	A	0.11
600V	A	0.22
IEC Conventional free air thermal current Ith	А	10
Terminals		
Auxiliary circuit type		screw and
		washer
Auxiliary circuit screw		M3,5
Auxiliary circuit width	mm	8
Auxiliary circuit tool		Phillips 1
Conductor section	2	0.5
Auxiliary circuit Flexible w/o lug max	mm²	2.5
Auxiliary circut Flexible c/w lug max	mm²	2.5
Tightening torque for terminals	Nime	4
Auxiliary circuit min	Nm Nm	1
Auxiliary circuit max Auxiliary circuit min	Ibin	1 0.74
Auxiliary circuit max	Ibin	0.74
UL/CSA and IEC/EN 60947-5-1 designation	10111	B600-P600
Ambient conditions		D000 1 000
Operating temperature		
min	°C	-20
max	°Č	55
Storage temperature		
min	°C	-55
max	°Č	70
Compensation temperature		
min	°C	-15
max	°Č	55
Max altitude	m	3000
Mechanical features		
Operating position		
normal		Vertical plan
allowable		±30°
		Direct mounting
Fixing		on BG06
		BG09 BG12
Weight	g	123
UL technical data		
Full-load current (FLA) for three-phase AC motor		
at 480V	А	0.5
at 600V	А	0.5

11RFN905




ENERGY AND AUTOMATION

MOTOR PROTECTION RELAY, NON PHASE FAILURE/NON SINGLE-PHASE SENSITIVE. THREE-POLE (THREE-PHASE), MANUAL RESETTING. DIRECT MOUNTING ON BG06, BG09, BG12 MINI-CONTACTORS, 0.3...0.5A

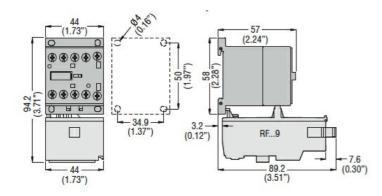

Wiring diagrams

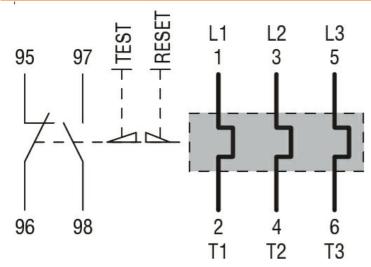

Certifications and compliance

Compliance

Compliance	
	CSA C22.2 n° 14
	IEC/EN 60947-1
	IEC/EN 60947-4-1
	UL508
Certifications	
	CCC
	CSA
	cULus
	EAC
ETIM classification	

ETIM 8.0

EC000106 -Thermal overload relay