

ENERGY AND AUTOMATION

MOTOR PROTECTION RELAY, PHASE FAILURE/SINGLE-PHASE SENSITIVE. THREE-POLE electric (THREE-PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 CONTACTORS, 32...38A



Product designation			RF38
Product type designation			Motor protection relay
General characteristics			Tolay
Number of poles		Nr.	3
Overvoltage category			III
Pollution degree			3
Frontal IP degree			IP20
Type of release			Thermal
Protection fuse			
	gG (IEC)	Α	63
	aM (IEC)	Α	40
	RK5 (UL)	Α	150
Phase failure detection			yes
Reset mode			Manual or
			automatic
Power circuit characteristics			
Rated insulation voltage Ui IEC/EN		V	690
Rated impulse withstand voltage Uimp		kV	6
Rated operational voltage		V	690
Operational frequency			
	min	Hz	0
	max	Hz	400
Operational current le			
	Operational current min	A	32
	Operational current max	A	38
Tripping class			10A
Test Button			Yes
Trip indicator			yes
Terminals			
	type		screw and washer
	screw		M4
	width	mm	12.6
	tool	111111	Phillips 2
Tightening torque for terminals	1001		T Tillipo Z
righterining terque for terminate	min	Nm	2
	max	Nm	2.5
	min	lbin	1.5
	max	Ibin	1.8
Conductor section			-
	Flexible w/o lug max	mm²	10
	Flexible c/w lug max	mm²	6
	AWG/kcmil max		8
Auxiliary circuit characteristics			



ENERGY AND AUTOMATION

MOTOR PROTECTION RELAY, PHASE FAILURE/SINGLE-PHASE SENSITIVE. THREE-POLE electric (THREE-PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 CONTACTORS, 32...38A

Auxiliary contacts

Auxiliary contacts			
	NO	Nr.	1
	NC	Nr.	1
Auxiliary Rated insulation voltage Ui IEC/EN		V	690
Auxiliary Rated impulse withstand voltage Uimp		kV	6
Auxiliary Rated operational voltage		V	690
Operating current AC15			
	24V	Α	3
	120V	Α	3
	240V	Α	1.5
	380V	Α	0.95
	480V	Α	0.75
	500V	Α	0.72
	600V	A	0.6
Operating current DC13			
	125V	Α	0.11
	600V	A	0.22
IEC Conventional free air thermal current Ith		Α	10
Terminals			
	Auxiliary circuit type		screw and
			washer
	Auxiliary circuit screw		M3.5
	Auxiliary circuit width	mm	8
	Auxiliary circuit tool		Phillips 2
Conductor section			
	Auxiliary circuit Flexible w/o lug max	mm²	2.5
	Auxiliary circut Flexible c/w lug max	mm²	2.5
Tightening torque for terminals			
	Auxiliary circuit min	Nm	0.8
	Auxiliary circuit max	Nm	1
	Auxiliary circuit min	lbin	0.59
	Auxiliary circuit max	Ibin	0.74
UL/CSA and IEC/EN 60947-5-1 designation			B600-R300
Ambient conditions			
Operating temperature		° C	0.5
	min	°C	-25
Character terminary and true	max	<u> </u>	60
Storage temperature		°C	E0
	min	°C	-50 70
Componentian temperature	max	<u> </u>	70
Compensation temperature		°C	20
	min	°C	-20 60
Max altitude	max		3000
Mechanical features		m	3000
Operating position			
Operating position	normal		Vertical plan
	normai allowable		Vertical plan ±30°
	allowable		
Fixing			Direct mounting on BF09
Living			BF38
Weight		g	160
UL technical data		У	100
<u></u>			

MOTOR PROTECTION RELAY, PHASE FAILURE/SINGLE-PHASE SENSITIVE. THREE-POLE **electric** (THREE-PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 CONTACTORS, 32...38A


ENERGY AND AUTOMATION

Full-load current (FLA) for three-phase AC motor


at 480V Α 38 at 600V Α 38

Dimensions


BF00 A... BF09 A... - BF12 A... - BF18 A... - BF25 A... three poles with RF...38 thermal overload relay

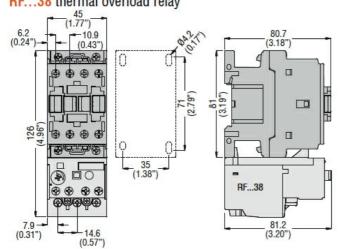

BF26 00A... - BF32 00A... - BF38 00A... three poles with RF...38 thermal overload relay

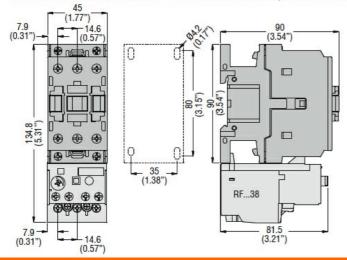

Wiring diagrams

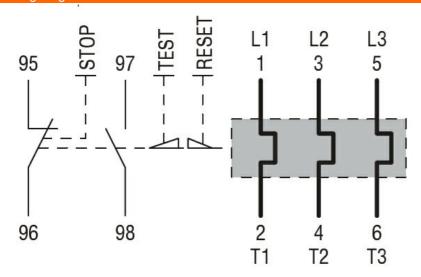

Certifications and compliance

RF383800



MOTOR PROTECTION RELAY, PHASE FAILURE/SINGLE-PHASE SENSITIVE. THREE-POLE **electric** (THREE-PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 CONTACTORS, 32...38A

ENERGY AND AUTOMATION

Compliance

CSA C22.2 n° 14 IEC/EN 60947-1

IEC/EN 60947-4-1

UL508

Certifications

CCC

cULus

EAC

ETIM classification

ETIM 8.0

EC000106 -

Thermal overload

relay