



| | | | |
|---|-------------------------------------|----|-------|
| Product designation | Rotary cam switches | | |
| Product type designation | GX20 | | |
| General characteristics | | | |
| Switching diagram | 91 - ON/OFF switch 2 poles | | |
| N° of elements | 1 | | |
| Mounting form | O - Rear mounting with black handle | | |
| Contact characteristics | | | |
| Rated insulation voltage U_i | IEC/EN | V | 690 |
| | UL/CSA | V | 600 |
| Rated impulse withstand voltage U_{imp} | | kV | 6 |
| Conventional free air thermal current I_{th} | IEC/EN | A | 20 |
| | UL/CSA | A | 15 |
| Rated operational voltage | | V | 440 |
| Rated operational impulse voltage | | kV | 4 |
| Maximum fuse size for short-circuit protection I_n (gG) | 10kA | A | 20 |
| | 15kA | A | 20 |
| | 25kA | A | 20 |
| Rated short time current I_{cw} | 1s | kA | 250 |
| | Conductivity 10/5 mA/V | | |
| Operational current I_e IEC/EN | AC1/AC21A | | A 20 |
| | AC15 | | |
| | 110V | A | 10 |
| | 220/230V | A | 8 |
| | 380/400V | A | 6 |
| Rated operational power in AC | 660/690V | | A 1.5 |
| | Three-phase AC-3 | | |
| | 220/230V | kW | 3.7 |
| | 380/440V | kW | 5.5 |
| | 500/690V | kW | 5.5 |
| Single-phase AC-3 | 110V | kW | 0.75 |
| | 220/230V | kW | 1.8 |
| | 380/440V | kW | 3 |
| Three-phase AC23A | 220/230V | kW | 4 |

| | | | |
|--|----------|-----------------|-------------------|
| | 380/440V | kW | 7.5 |
| | 500/690V | kW | 7.5 |
| Single-phase AC23A | | | |
| | 110V | kW | 0.75 |
| | 220/230V | kW | 2.2 |
| | 380/440V | kW | 3.5 |
| Rated operational current in DC | | | |
| DC21A | | | |
| | 48V | A | 20 |
| | 60V | A | 20 |
| | 110V | A | 4 |
| | 220V | A | 0.6 |
| | 440V | A | 0.25 |
| DC23A (poles in series) | | | |
| | 24V | A | 20 (1) |
| | 48V | A | 20 (2) |
| | 60V | A | 20 (3) |
| | 110V | A | 10 (3) |
| | 220V | A | 8 (4) |
| DC13 | | | |
| | 24V | A | 20 |
| | 48V | A | 16 |
| | 60V | A | 12 |
| | 110V | A | 1 |
| | 220V | A | 0.4 |
| | 440V | A | 0.15 |
| Power dissipation | | W | 0.6 |
| Mechanical features | | | |
| Terminals screw | | | M3 |
| Tightening torque for terminals max | | Nm | 0.8 |
| Conductor size | | | |
| AWG - Rigid cable | | | |
| | min | AWG | 20 |
| | Max | AWG | 12 |
| AWG - Flexible cable | | | |
| | min | AWG | 20 |
| | Max | AWG | 12 |
| Conductor size (IEC) - Flexible cable | | | |
| | min | mm ² | 0.5 |
| | Max | mm ² | 2.5 |
| Conductor size (IEC) - Rigid cable | | | |
| | min | mm ² | 0.5 |
| | Max | mm ² | 2.5 |
| Mechanical life | | cycles | 1X10 ⁶ |
| UL technical data | | | |
| Motor power for direct-on-line control | | | |
| for three-phase motor | | | |
| | 120V | HP | 1.5 |
| | 240V | HP | 3 |
| | 480V | HP | 5 |
| | 600V | HP | 5 |
| for single-phase motor | | | |
| | 120V | HP | 0.75 |
| | 240V | HP | 1.5 |

Ambient conditions

Temperature

Operating temperature

| | | |
|-----|----|-----|
| min | °C | -25 |
| max | °C | +55 |

Storage temperature

| | | |
|-----|----|-----|
| min | °C | -40 |
| max | °C | +70 |

Resistance & Protection


Frontal IP degree

IP65

Terminals IP degree


IP20

Dimensions

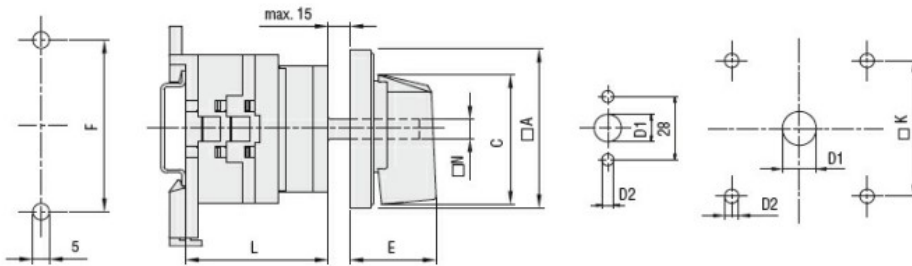

| Series | Dimensions | | | | | L Number of elements | | | | | | | | | | | |
|-------------|------------|------|------|----|----|----------------------|------|----|------|----|------|-----|------|-----|-------|-----|-------|
| | □A | C | E | F | □N | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
| GX16 | 48 | 39.5 | 26.5 | 52 | 6 | 37 | 45.5 | 54 | 62.5 | 71 | 79.5 | 88 | 96.5 | 105 | 113.5 | 122 | 130.5 |
| GX20 | 48 | 39.5 | 26.5 | 52 | 6 | 37 | 45.5 | 54 | 62.5 | 71 | 79.5 | 88 | 96.5 | 105 | 113.5 | 122 | 130.5 |
| GX32 | 65 | 53 | 34.5 | 68 | 7 | 48 | 60 | 72 | 84 | 96 | 108 | 120 | 132 | 144 | 156 | 168 | 180 |
| GX40 | 65 | 53 | 34.5 | 68 | 7 | 48 | 60 | 72 | 84 | 96 | 108 | 120 | 132 | 144 | 156 | 168 | 180 |

Wiring diagrams

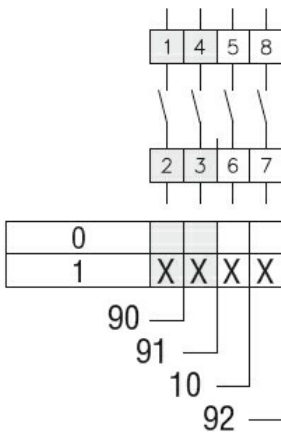

Certifications and compliance

Compliance

- CSA C22.2 n° 14
- IEC/EN/BS 60947-1
- IEC/EN/BS 60947-3
- IEC/EN/BS 60947-5-1
- IEC/EN/BS 61058-1
- UL60947-4-1

Certificates

- cULus
- EAC

ETIM classification

ETIM 8.0

EC001029 -
Selector switch,
complete