



Electrical features

Supplies voltage

Type of system	Three phase
Rated supply voltage	208...600VAC
auxiliary supply voltage (Us)	24VAC/DC
Rated frequency	50/60
Rated starter current Ie	195
Rated motor power inside delta	
IEC ratings (T≤40°C)	
230VAC	55
400VAC	110
500VAC	132
UL ratings (T≤40°C)	
220-240VAC	75
380-415VAC	100
440-480VAC	150
550-600VAC	200
Number of controlled phases	2
Built-in bypass	Yes
Cooling System	Forced
Rated insulation voltage Ui	600

Programming interface

Display	Backlit icon LCD display
Programming with NFC technology	Yes
Optical port	Yes

Startup and stop settings

Startup method	Torque ramp with current limit, Voltage ramp with current limit, Constant torque with current limit
Stop method	Torque ramp, voltage ramp, free-wheel stop

Protections

Auxiliary supply protection	Voltage too low
Power supply Protection	No power, phase loss, phase sequence, frequency out of limits, minimum and maximum voltage

Motor protection	Overload at starting (trip class 2, 10A, 10, 15, 20, 25, 30, 35 and 40), overload during running (trip class 2, 10A, 10, 15, 20, 25 and 30), locked rotor, current asymmetry, minimum torque (dry run), overtemperature, starting too long
Starter protection	Overcurrent, overtemperature, bypass failure, phase shorted, temperature sensor fault, cooling fan fault, maintenance request


Functions	
Built-in bypass	Yes
Built-in display and keypad	Yes
Languages	6
View measurements	Yes
Torque control	Yes
Adjustable current limit	Yes
Dynamic braking	Yes
Kick Start function	Yes
Motor overload electronic protection	Yes
Motor protection PTC input	Yes
Protection against phase loss	Yes
Protection against phase inversion	Yes
Protection against locked rotor	Yes
Protection against thyristor overtemperature	Yes
Protection against low load	Yes
Programmable alarm	Yes
Digital inputs	3
Analog inputs	0
Digital outputs	3
Analog output	0
Optical port for programming	Yes
Event log	Yes
Motor hour counter	Yes
Startup counter	Yes
Clock calendar	Yes
Remote external keypad	Yes

Input and Output	
Digital inputs	

Number of digital input Nr. 3

		Digital input type	2 input with dry contact + 1 input with dry contact or PTC (configurable)	
		Digital input functions	Programmable (motor start, motor stop, freewheel stop, motor preheating, commands lock, alarms inhibition, thermal status reset, keyboard lock, motor selection, user alarm, command)	
Digital outputs				
		Number of digital output	Nr.	3
		Digital output arrangement	2 x 1 NO (SPST) + 1 C/O (SPDT) Ratings: 2 x 1NO contacts: 3A 250VAC - 3A 30VDC 1 x C/O contact: NO contact 5A 250VAC - 5A 30VDC; NC contact 3A 250VAC - 3A 30VDC Programmable (line contactor, run, global alarm, limits, remote variable, alarm Axx, user alarm Axx, OFF)	
		Digital output functions		
Ambient conditions				
Temperature				
		Operating temperature		
		min	°C	-20
		max	°C	+60°C (with current derating >40°C of 0.5%/°C)
		Storage temperature		
		min	°C	-30
		max	°C	+80
Max altitude			m	1000 without derating (over 1000mt with current derating of 0.5%/100m)
Relative humidity			%	<80%

Pollution degree	2
Installation category	III
Housing	
Mounting	Screw-fixing
IP degree of protection	IP00
Dimensions (W x H x D)	mm 212 x 486 x 216
Weight	Kg 13.9
Dimensions	

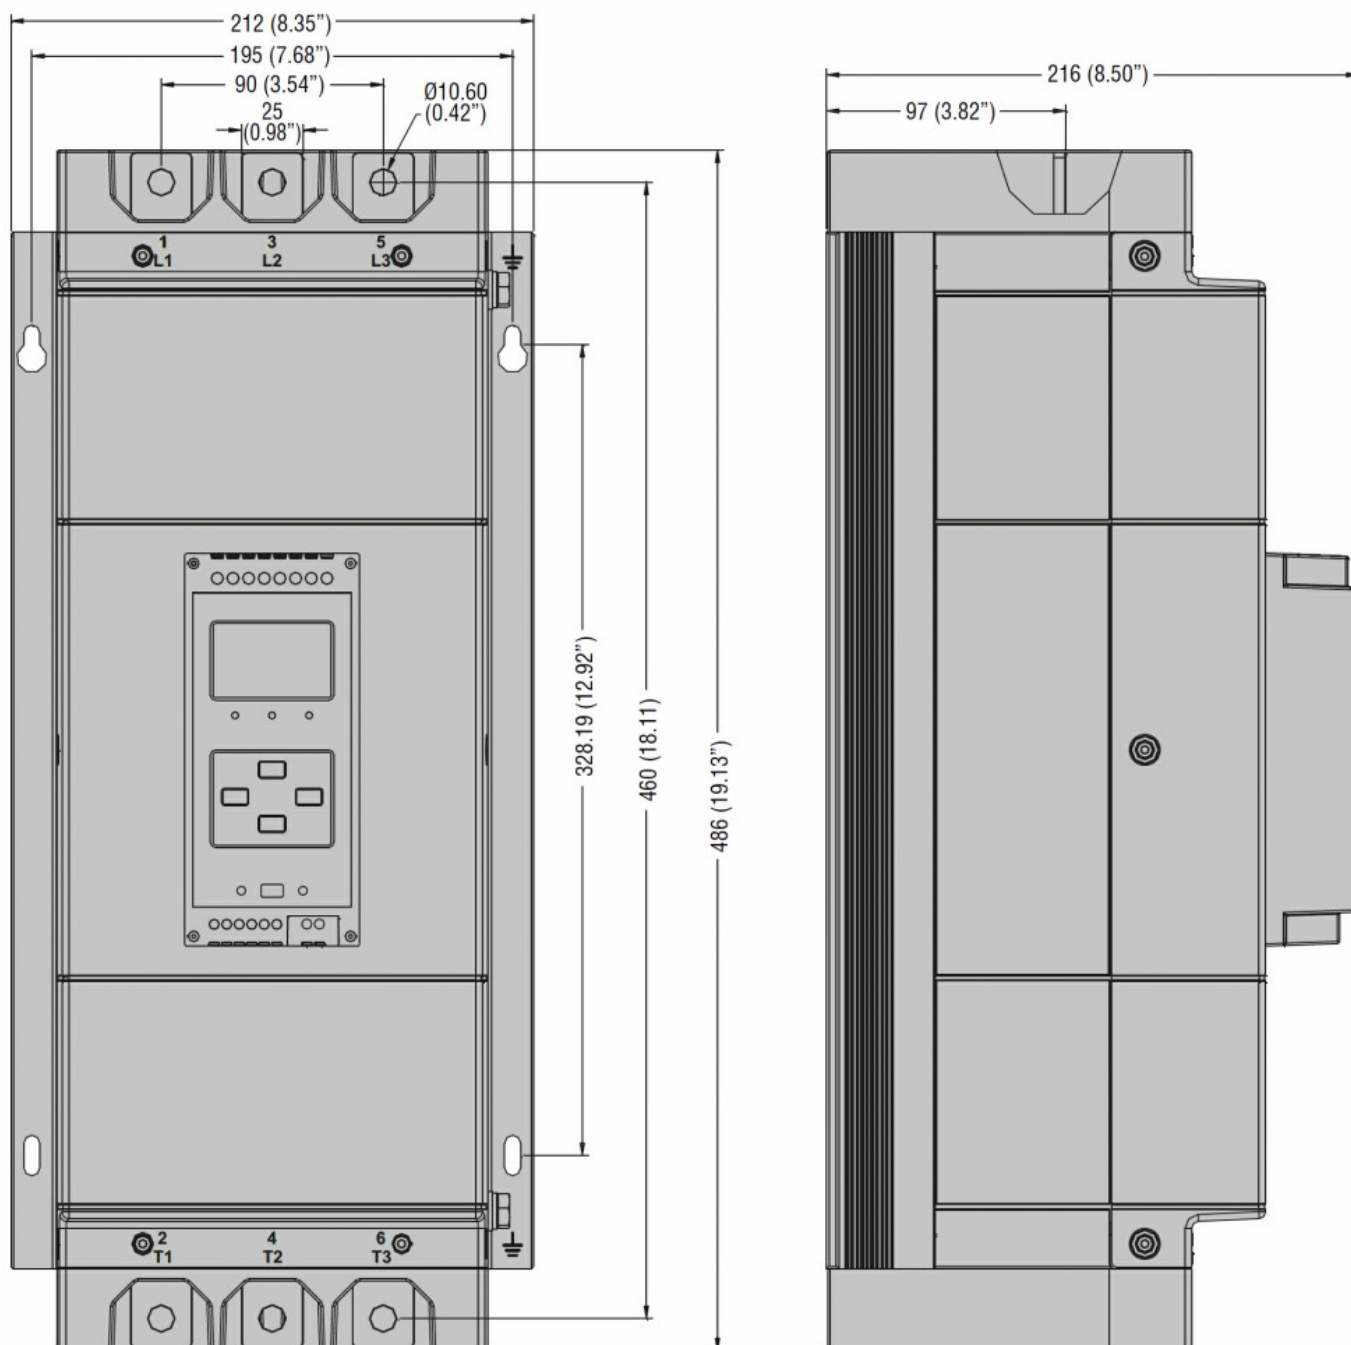

Certifications and compliance

Compliance

CSA C22.2-N°14
IEC/EN/BS 60068-2-27
IEC/EN/BS 60068-2-6
IEC/EN/BS 60068-2-61

SOFT STARTER, ADXL SERIES, WITH INTEGRATED BYPASS RELAY. AUXILIARY SUPPLY
24VAC/DC. RATED OPERATIONAL VOLTAGE 208...600VAC 50/60HZ, 195A

IEC/EN/BS 60947-1:2014

IEC/EN/BS 60947-4-2:2011

UL508

Certificates

cULus

EAC

ETIM classification

ETIM 8.0

EC000640 - Soft
starter