



Product designation  
Product type designation  
Motor type

Soft starter basic  
ADXNB  
Asynchronous  
three phase

### Electrical features

Supplies voltage

Type of system	Three phase	
Rated supply voltage	V	208...600VAC
auxiliary supply voltage (Us)		100...240VAC
Rated frequency	Hz	50/60
Rated starter current Ie	A	38
Rated motor power		
IEC ratings (T≤40°C)		
	230VAC	kW 11
	400VAC	kW 18.5
	500VAC	KW 22
UL ratings (T≤40°C)		
	220-240VAC	HP 10
	380-415VAC	HP 20
	440-480VAC	HP 25
	550-600VAC	HP 30
Number of controlled phases	Nr.	2
Built-in bypass		Yes
Cooling System		Forced
Rated insulation voltage Ui	V	600

### Programming interface

Potentiometer	Settings: starting voltage, acceleration ramp, deceleration ramp	
Display	No	
Programming with NFC technology	No	
Optical port	No	

### Startup and stop settings

Startup method	Voltage ramp	
Stop method	Voltage ramp or free-wheel stop	
Acceleration ramp	s	1-20
Deceleration ramp	s	0-20
Startup voltage	%	30-80

### Protections

Power supply Protection	No power line, phase loss, frequency out of limits, phase sequence (configurable)
Starter protection	Overtemperature

Functions	
Built-in bypass	2
Built-in display and keypad	Yes
Languages	No
View measurements	No
Torque control	No
Adjustable current limit	No
Dynamic braking	No
Kick Start function	No
Motor overload electronic protection	No
Motor protection PTC input	No
Protection against phase loss	No
Protection against phase inversion	Yes
Protection against locked rotor	Yes
Protection against thyristor overtemperature	No
Protection against low load	Yes
Programmable alarm	No
Digital inputs	No
Analog inputs	Yes
Digital outputs	No
Analog output	Yes
Monitoring communication	No
Optical port for programming	Optional
Event log	No
Motor hour counter	No
Startup counter	No
Clock calendar	No
Remote external keypad	No
Plug-in version	No

### Input and Output

Digital inputs	Number of digital input	Nr.	1
	Digital input type		Volt-free contact
	Digital input functions		Motor start
Digital outputs	Number of digital output	Nr.	2
	Digital output arrangement		2 NO contacts with the same common, 5A 250VAC AC1 - 5A 30 VDC
	Digital output functions		Line contactor (Run), TOR (Top Of Ramp)

### Communication interfaces

Communication interface	No
-------------------------	----

### Ambient conditions

Temperature

Operating temperature

min	°C	-20
max	°C	+60°C (with current derating >40°C)

Storage temperature

min	°C	-30
max	°C	+80

Max altitude

m	1000 without derating of the starter current
---	--

Relative humidity

%	<80%
---	------

Pollution degree

2

Installation category

III

Housing

Mounting

Screw-fixing or  
35mm DIN rail  
(IEC/EN/BS  
60715)

IP degree of protection

IP20


Dimensions (W x H x D)

mm	45 x 159 x 128.4
----	------------------

Weight

Kg	0.66
----	------

Dimensions

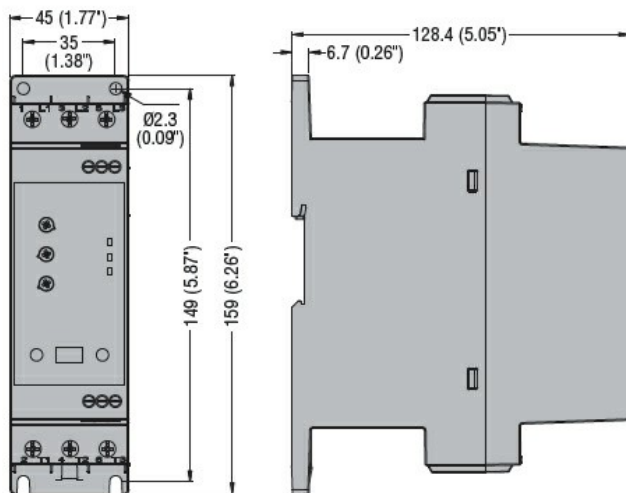

Certifications and compliance

Compliance

CSA C22.2 n° 60947-4-2

IEC/EN/BS 60947-1

IEC/EN/BS 60947-4-2

UL 60947-4-2

Certificates

cULus

EAC

RCM (pending)

ETIM classification

ETIM 8.0

EC000640 - Soft  
starter