



Product designation			Variable speed drives
Product type designation			VLB3
General characteristics			
Rated power supply voltage			400...480VAC 50/60Hz
Rated output voltage	VAC	Three-phase 0... 480VAC 0-599Hz	
Rated output current	A	1.3	
Rated output power	kW	0.4	
Rated output power	HP	0.5 (heavy load)	
EMC filter			Built-in EMC suppressor cat. C1/C2
Communication port			RS485, Modbus- RTU
Technical features			
Input type			Three-phase
Rated mains voltage	VAC	400...480	
Operating mains voltage range	VAC	340...528	
Rated mains frequency	Hz	50/60	
Operating mains frequency range	Hz	45...65	
Rated mains current without mains choke			1.8
Rated mains current with mains choke			1.4
Output type			Three-phase
Output voltage range	VAC	0...480	
Output frequency range	Hz	0...599	
Current overload	%/s	150% for 60s; 200% for 3s	
Apparent output power			0.9 (heavy load)
Power loss			4kHz: 20W (heavy load)
Brake chopper			Yes
Switching frequency			2...16kHz
Max motor cable length			
	Shielded		
		Without EMC category	m 15
		Category C1	m 3
		Category C2	m 15
		Category C3	m 15
	Unshielded		
		Without EMC category	m 30

Functions

Motor control modes	V/f linear, quadratic torque, sensorless vector control, ECO mode, servo control with encoder feedback, multipoint V/f curve, V/f closed loop control with encoder feedback, torque setpoint, sensorless control for synchronous motors up to 22kW
Speed reference signals	External potentiometer 0...10kΩ Voltage signals: 0... 10VDC or -10... +10VDC Current signals: 0/4... 20mA Buttons on front keyboard Door-mount installation kit 15 preset speeds via digital inputs Motor potentiometer Fieldbus
3-wire control	Yes
S-shape curves	Yes
Slip compensation	Yes
Flying restart	Yes
Access to DC bus	Yes
DC braking	Yes
DC injection at start	Yes
PID control	Yes, with sleep and rinse function
Sequencer (programmable frequency/time cycles)	Yes
Preset speeds	Yes
Motorpotentiometer	Yes
Different parameter configuration sets	Yes
Parameters changeover function	Yes
Favorite parameters menu	Yes
Autotuning	No
Safe torque Off (STO) safety function	Optional
PTC probe input	Yes


Protections	Overcurrent Output short circuit and earth/ground leakage Overvoltage Undervoltage Phase loss Motor heat overload (i2t) Overspeed Speed reverse
Special funct.	Multi-pump PID control (1 main pump frequency regulated + 2 auxiliary pumps activated in direct mode in case of necessity)
Input and Output	
Number of digital input	Nr. 5
Digital input type	Selectable PNP or NPN logic
Number of digital output	Nr. 2
Digital output arrangement	1 relay output with changeover contact (C/O-SPDT) + 1 digital output
Output contacts ratings	Relay output: 3A 250VAC Digital output: 100mA max 30VDC
Number of analog input	Nr. 2
Analog input type	Configurable 0/2...10VDC, -10...+10VDC, 0...5VDC, 0/4...20mA
Number of analog output	Nr. 1
Analog output type	configurable as 0...10VDC, 0...5VDC, 2...10VDC, 0/4...20mA
Ambient conditions	
Temperature	
Operating temperature	
min	°C -10
max	°C +55
Current derating	2.5%/°C over 45°C
Storage temperature	
min	°C -25
max	°C +60
Relative humidity	% 5...95% (with no condensing)

Max altitude	m	4000m (over 1000m derate the rated current by 5%/1000m)
Maximum Pollution degree		2
Overvoltage category		III up to 2000m altitude (II above 2000m)


Housing

Installation position		Vertical
IP degree of protection		IP20
Dimensions (W x H x D)	mm	60 x 214 x 130
Weight	Kg	0.85

Dimensions

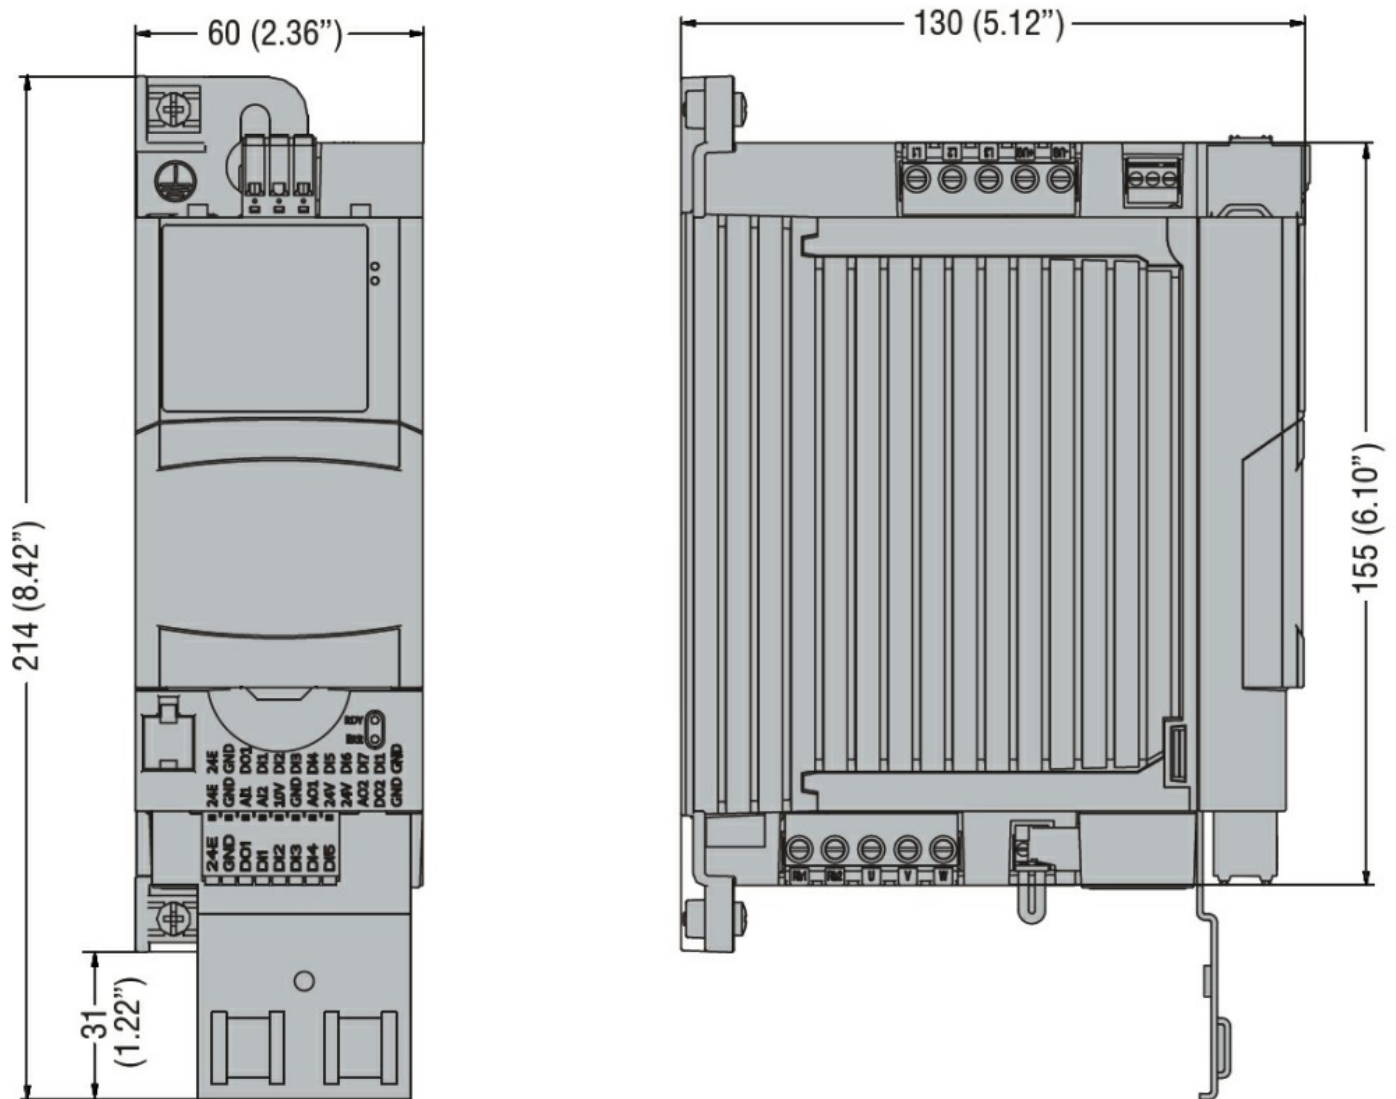

Wiring diagrams

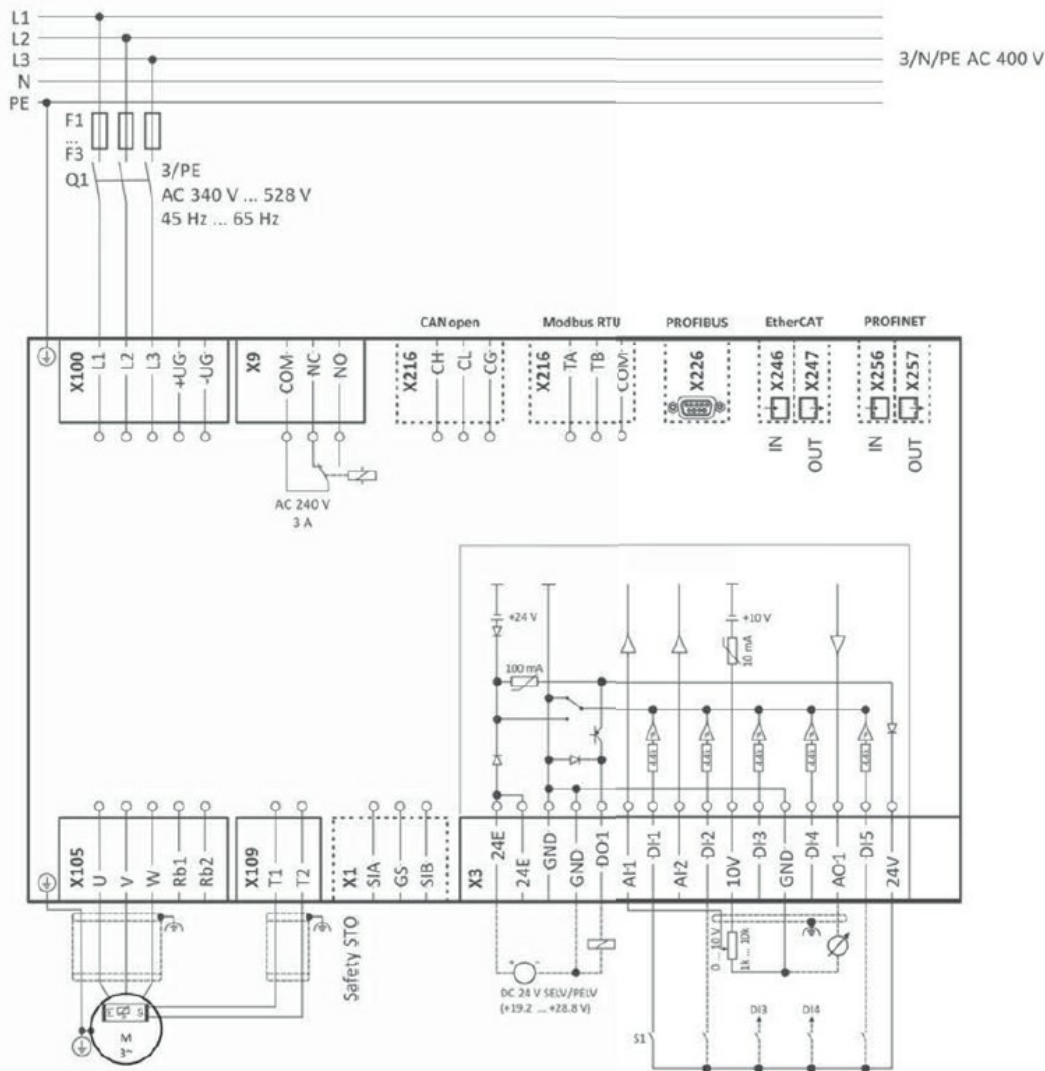

Certifications and compliance

Compliance

- CSA 22.2 n°274
- EN 61800-5-1
- UL61800-5-1

Certificates

- CSA
- cULus
- EAC
- RCM

ETIM classification

ETIM 8.0

EC001857 -
Frequency
converter =< 1 kW