



Product designation			Variable speed drives
Product type designation			VLB3
<b>General characteristics</b>			
Rated power supply voltage			400...480VAC 50/60Hz
Rated output voltage	VAC	Three-phase 0... 480VAC 0-599Hz	
Rated output current	A	47	
Rated output power	kW	22	
Rated output power	HP	30 (Heavy load) / 40 (Standard load)	
EMC filter			Built-in EMC suppressor cat. C2
Communication port			RS485, Modbus- RTU
<b>Technical features</b>			
Input type			Three-phase
Rated mains voltage	VAC	400...480	
Operating mains voltage range	VAC	340...528	
Rated mains frequency	Hz	50/60	
Operating mains frequency range	Hz	45...65	
Rated mains current with mains choke			42 (heavy load) / 55 (standard load)
Output type			Three-phase
Output voltage range	VAC	0...480	
Output frequency range	Hz	0...599	
Current overload	%/s	150% for 60s; 200% for 3s	
Apparent output power			32 (heavy load) / 38 (standard load)
Power loss			4kHz: 520W (heavy load) / 623 (standard load)
Brake chopper			Yes
Switching frequency			2...16kHz
Max motor cable length			
	Shielded	Without EMC category	m 100
		Category C1	m 3
		Category C2	m 20
		Category C3	m 35

Unshielded

Without EMC category m 200

**Functions**

Motor control modes	V/f linear, quadratic torque, sensorless vector control, ECO mode, servo control with encoder feedback, multipoint V/f curve, V/f closed loop control with encoder feedback, torque setpoint, sensorless control for synchronous motors up to 22kW
Speed reference signals	External potentiometer 0...10kΩ Voltage signals: 0...10VDC or -10...+10VDC Current signals: 0/4...20mA Buttons on front keyboard Door-mount installation kit 15 preset speeds via digital inputs Motor potentiometer Fieldbus
3-wire control	Yes
S-shape curves	Yes
Slip compensation	Yes
Flying restart	Yes
Access to DC bus	Yes
DC braking	Yes
DC injection at start	Yes
PID control	Yes, with sleep and rinse function
Sequencer (programmable frequency/time cycles)	Yes
Preset speeds	Yes
Motorpotentiometer	Yes
Different parameter configuration sets	Yes
Parameters changeover function	Yes
Favorite parameters menu	Yes
Autotuning	No
Safe torque Off (STO) safety function	Optional
PTC probe input	Yes

Protections	Overcurrent Output short circuit and earth/ground leakage Overvoltage Undervoltage Phase loss Motor heat overload (i2t) Overspeed Speed reverse
-------------	--

Special funct.	Multi-pump PID control (1 main pump frequency regulated + 2 auxiliary pumps activated in direct mode in case of necessity)
----------------	--

**Input and Output**

Number of digital input	Nr.	5
-------------------------	-----	---

Digital input type	Selectable PNP or NPN logic
--------------------	-----------------------------

Number of digital output	Nr.	2
--------------------------	-----	---

Digital output arrangement	1 relay output with changeover contact (C/O-SPDT) + 1 digital output
----------------------------	--

Output contacts ratings	Relay output: 3A 250VAC Digital output: 100mA max 30VDC
-------------------------	--

Number of analog input	Nr.	2
------------------------	-----	---

Analog input type	Configurable 0/2...10VDC, -10...+10VDC, 0...5VDC, 0/4...20mA
-------------------	--

Number of analog output	Nr.	1
-------------------------	-----	---


Analog output type	configurable as 0...10VDC, 0...5VDC, 2...10VDC, 0/4...20mA
--------------------	--

**Ambient conditions**

Temperature	Operating temperature	min	°C	-10
		max	°C	+55

			switching frequency 2 or 4kHz: 2.5%/°C over 45°C switching frequency 8 or 16kHz: 2.5%/°C over 40°C
	Current derating		
	Storage temperature		
	min	°C	-25
	max	°C	+60
Relative humidity		%	5...95% (with no condensing)
Max altitude		m	4000m (over 1000m derate the rated current by 5%/1000m)
Maximum Pollution degree			2
Overvoltage category			III up to 2000m altitude (II above 2000m)
<b>Housing</b>			
Installation position			Vertical
IP degree of protection			IP20
Dimensions (W x H x D)		mm	Batch <=D 204.5 x 366 x 222 Batch >=E 180 x 384 x 165
Weight		Kg	10.65

**Dimensions**

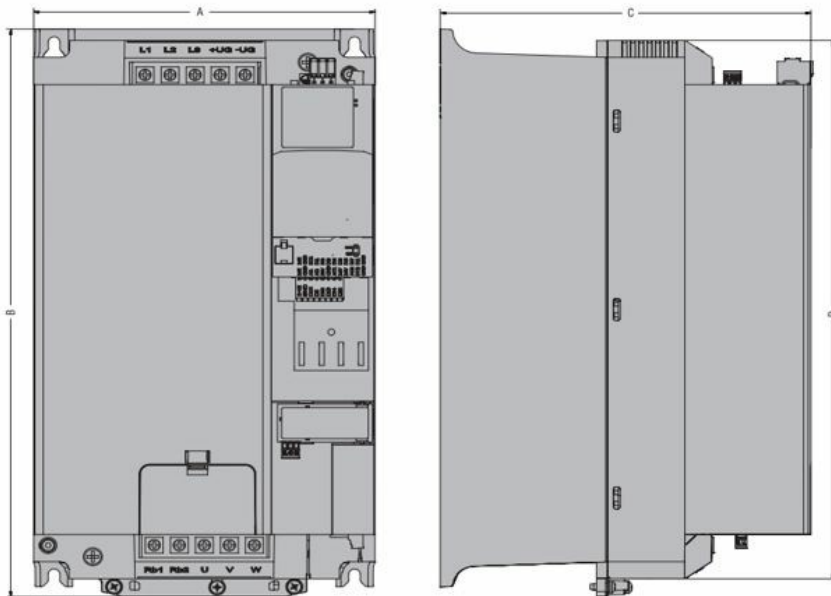

Batch number	A	B	C	D
letter D or lower	204,5	366	222	347
letter E or greater	180	384	165	342

**Wiring diagrams**

