



Product designation
Product type designation
Motor type

Soft Starter
ADXT
Asynchronous
three phase

Electrical features

Supplies voltage

Type of system		Three phase
Rated supply voltage	V	380...690VAC
auxiliary supply voltage (Us)		24VAC/DC
Rated frequency	Hz	50/60

Rated starter current Ie	A	230
--------------------------	---	-----

Rated motor power

IEC ratings (T≤40°C)

400VAC	kW	160
500VAC	KW	250

UL ratings (T≤40°C)

380-415VAC	HP	200
440-480VAC	HP	250
550-600VAC	HP	350

Number of controlled phases	Nr.	3
-----------------------------	-----	---

Built-in bypass	Yes
-----------------	-----

Cooling System	Forced
----------------	--------

Rated insulation voltage Ui	V	690
-----------------------------	---	-----

Programming interface

Display	LCD graphic display
---------	---------------------

Programming with NFC technology	No
---------------------------------	----

Optical port	No
--------------	----

Startup and stop settings

Startup method	Constant current, current ramp, voltage ramp, adaptive control
----------------	--

Stop method	Voltage ramp, adaptive control, free-wheel stop, DC braking, soft stop with braking contactor
-------------	---

Protections

Auxiliary supply protection	Voltage too low
-----------------------------	-----------------

Power supply Protection	No power, phase loss, phase sequence, frequency out of limits, voltage out of limits
-------------------------	--

Motor protection	Overload, locked rotor, current asymmetry, current too low, power too low, overtemperature, starting too long
Starter protection	Overcurrent, overtemperature, phase shorted

Functions	
Built-in bypass	Yes
Built-in display and keypad	Yes
Languages	6
View measurements	Yes
Torque control	No
Adjustable current limit	Yes
Dynamic braking	Yes
Kick Start function	Yes
Motor overload electronic protection	Yes
Motor protection PTC input	Thermistor input
Protection against phase loss	Yes
Protection against phase inversion	Yes
Protection against locked rotor	Yes
Protection against thyristor overtemperature	Yes
Protection against low load	Yes
Programmable alarm	Yes
Digital inputs	4
Analog inputs	0
Digital outputs	3
Analog output	1
Optical port for programming	No
Event log	Yes
Motor hour counter	Yes
Startup counter	Yes
Clock calendar	Yes
Remote external keypad	Yes

Input and Output			
Digital inputs			
	Number of digital input	Nr.	4
	Digital input type		4 input with dry contact + 1 thermistor input
	Digital input functions		1x Start/Stop, 1x Reset and 2 Programmable
Digital outputs			
	Number of digital output	Nr.	3
	Digital output arrangement		2x 1NO + 1x C/O 1NO Line contactor + 1NO Programmable + 1C/O Programmable
	Digital output functions		

Ambient conditions

Temperature

Operating temperature

min	°C	-10
max	°C	+60°C (with current derating >40°C)

Storage temperature

min	°C	-25
max	°C	+60

Max altitude

m	1000 without derating
---	--------------------------

Relative humidity

%	<95%
---	------

Pollution degree

3

Housing

Mounting

Screw-fixing

IP degree of protection

IP00


Dimensions (W x H x D)

mm 216x495x244

Weight

Kg 12.7

Dimensions

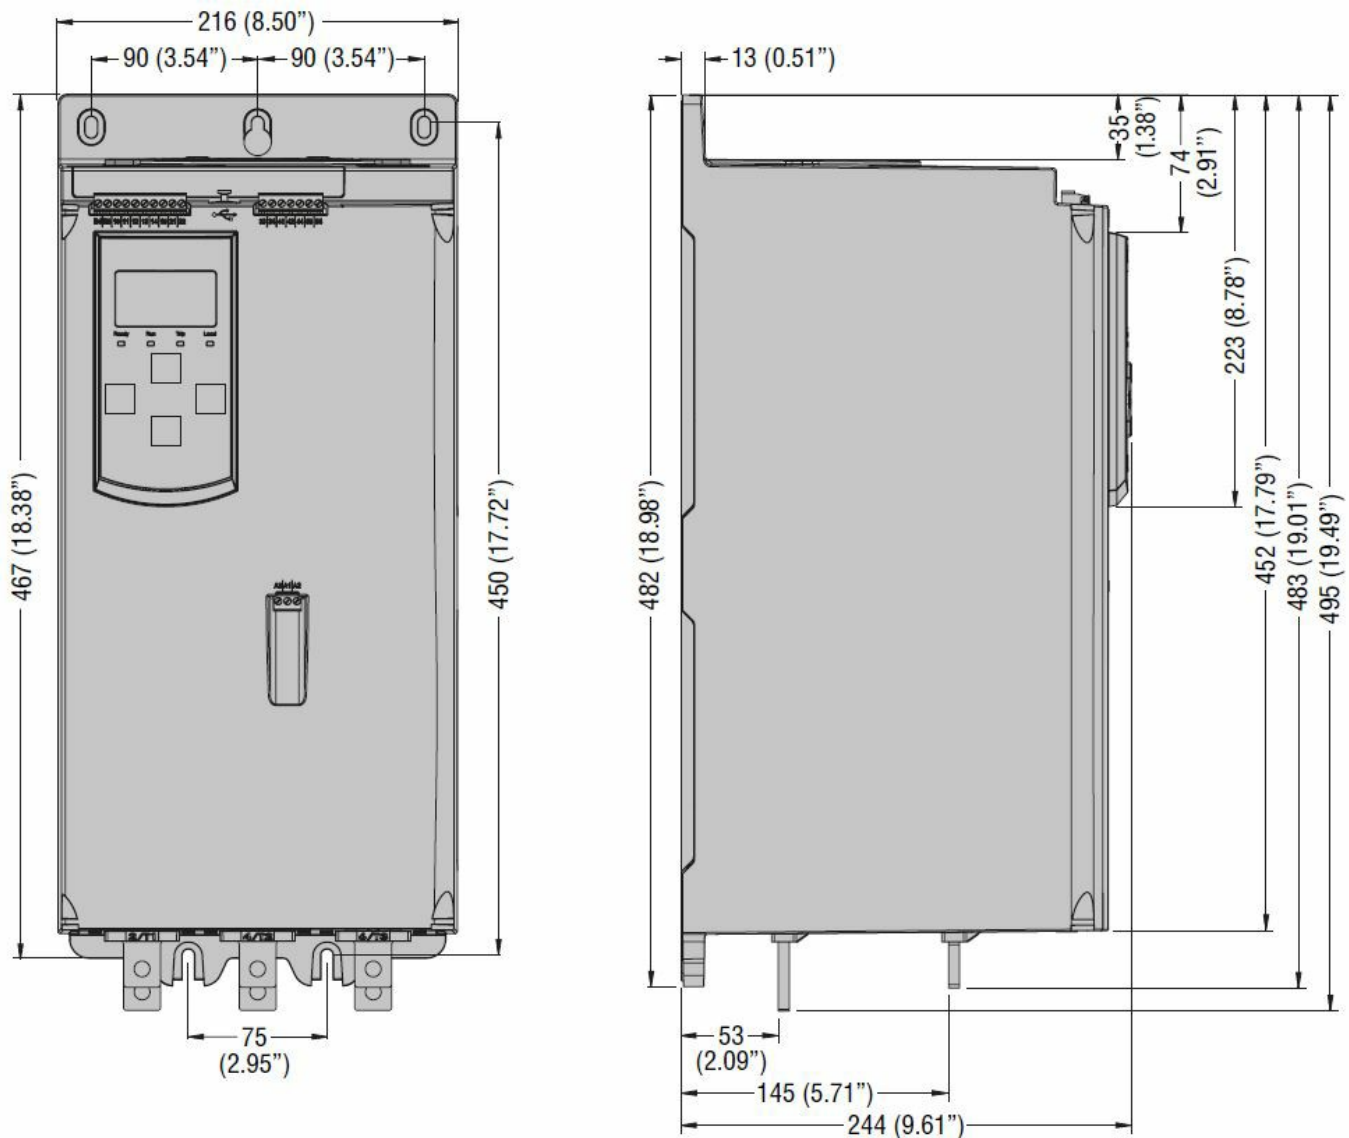

Certifications and compliance

Compliance

CSA C22.2 n°60947-4-2

IEC/EN/BS 60947-4-2

UL 60947-4-2

Certificates

cULus

RCM

ETIM classification

ETIM 8.0

EC000640 - Soft
starter